PROJECT-

258


1613

V/C/N/TY MAP (NTS)

DETOUR ROUTE

B-493|\Water and Wastewater\B-493|\_sew\_tsh\_UC0|.


STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

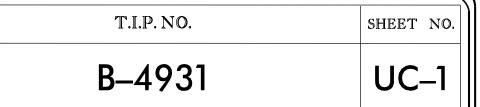


## EDGECOMBE COUNTY

LOCATION: REPLACE BRIDGE NO. 22 OVER
TOWN CREEK ON US 258

TYPE OF WORK: WATERLINE RELOCATION

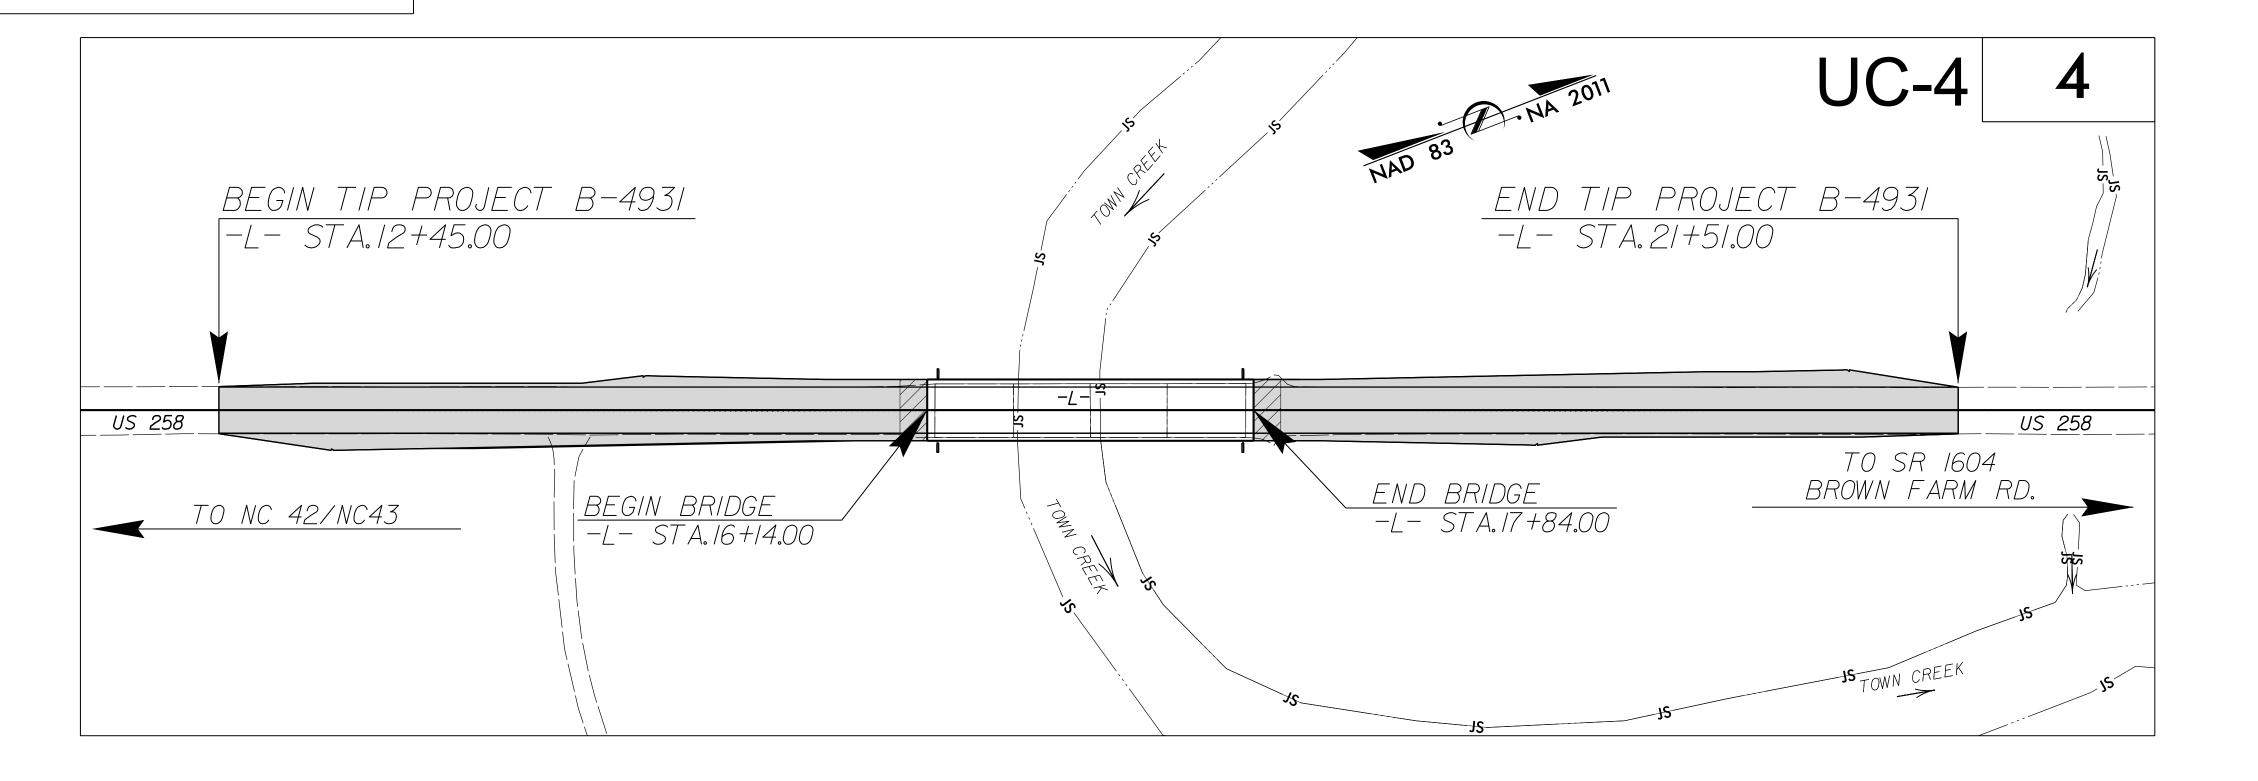

DOCUMENT NOT CONSIDERED FINAL UNTIL ALL SIGNATURES ARE COMPLETED

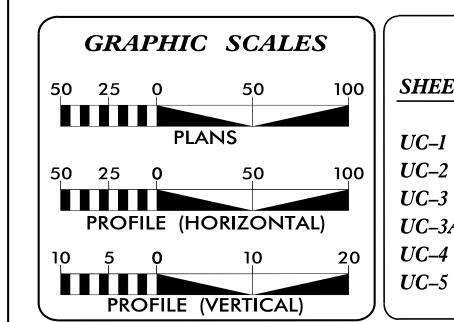

### INDEX OF SHEETS

SHEET NO.: DESCRIPTION:
UC-1 TITLE SHEET

UC-2
UTILITY SYMBOLOGY

UC-3
NOTES


UC-3A, UC-3B
DETAILS

UC-4
UTILITY PLAN SHEET

UC-5
UTILITY PROFILE SHEET

# WATER OWNER ON PROJECT

EDGECOMBE COUNTY WATER AND SEWER 201 SAINT ANDREW STREET POST OFFICE BOX 10 TARBORO, NC 27886

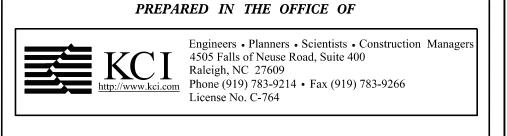

DINKISSA KEREYU, PE PROJECT ENGINEER

MARCO MENENDEZ, PE PROJECT MANAGER

CHARLES SHEARON PROJECT DESIGNER

Occusigne Charles Strain Strai

SEAL



DIVISION OF HIGHWAYS UTILITIES UNIT 1555 MAIL SERVICES CENTER RALEIGH NC 27699–1555 PHONE (919) 707–6690 FAX (919) 250–4151

NABIL HAMDAN
KIFAH KAMIL
KYLE PLEASANT

\_\_ UTILITIES REGIONAL ENGINEER
\_\_ UTILITIES ENGINEER

KYLE PLEASANTUTILITIES AREA COORDINATORLARRY JAMESUTILITIES COORDINATOR

## STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

## UTILITIES PLAN SHEET SYMBOLS

#### PROPOSED WATER SYMBOLS

## Water Line (Sized as Shown) 11⅓ Degree Bend 22½ Degree Bend 45 Degree Bend 90 Degree Bend Plug Tee · Cross. Reducer Gate Valve .. Butterfly Valve Tapping Valve Line Stop Line Stop with Bypass .. Blow Off Fire Hydrant ···· Relocate Fire Hydrant Remove Fire Hydrant Water Meter .... Relocate Water Meter Remove Water Meter Water Pump Station RPZ Backflow Preventer DCV Backflow Preventer Relocate RPZ Backflow Preventer Relocate DCV Backflow Preventer

REV: 2/1/2012

#### PROPOSED MISCELLANOUS UTILITIES SYMBOLS

Air Release Valve  Air Release Valve  Utility Vault  elephone Pedestal  tility Line by Others Type as Shown)  renchless Installation	
elephone Pedestal  tility Line by Others Type as Shown)  Tel PED  Trenchless Installation  Tel PED  Concrete Pier  Steel Pier  Plan Note  NOTE	
tility Line by Others	
renchless Installation	
NOTE.	
ncasement by Open Cut ···································	
PAY	
ncasement	

#### EXISTING UTILITIES SYMBOLS

	LAISIING OILLI	TILO SIMBOLO	
Power Pole	•	*Underground Power Line	
Telephone Pole		*Underground Telephone Cable	
Joint Use Pole	<b>-</b>	*Underground Telephone Conduit	
Utility Pole	•	*Underground Fiber Optics Telephone Cable	
Utility Pole with Base		*Underground TV Cable	
H-Frame Pole	•—•	*Underground Fiber Optics TV Cable	
Power Transmission Line Tower		*Underground Gas Pipeline	
Water Manhole		Aboveground Gas Pipeline	
Power Manhole	P	*Underground Water Line	
Telephone Manhole	$\bigcirc$	Aboveground Water Line	
Sanitary Sewer Manhole		*Underground Gravity Sanitary Sewer Liness	
Hand Hole for Cable	H <sub>H</sub>	Aboveground Gravity Sanitary Sewer Line A/G Sanitary Sewer	
Power Transformer		*Underground SS Forced Main Line	
Telephone Pedestal		Underground Unknown Utility Line	
CATV Pedestal		SUE Test Hole ·····	
Gas Valve	$\Diamond$	Water Meter	
Gas Meter	<b>♦</b>	Water Valve ····································	
Located Miscellaneous Utility Object	$\odot$	Fire Hydrant ····································	
Abandoned According to Utility Records	AATUR	Sanitary Sewer Cleanout ····· ⊕	
End of Information	E.O.I.		

*For Existing Utilities	
Utility Line Drawn from Record	
Designated Utility Line	

## UTILITY CONSTRUCTION


#### **GENERAL NOTES:**

- 1. THE PROPOSED UTILITY CONSTRUCTION SHALL MEET THE APPLICABLE REQUIREMENTS OF THE NC DEPARTMENT OF TRANSPORTATION'S "STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES" DATED JANUARY 2018.
- 2. THE EXISTING UTILITIES BELONG TO EDGECOMBE COUNTY COUNTY PUBLIC UTILITIES.
- 3. ALL WATER LINES TO BE INSTALLED
  WITHIN COMPLIANCE OF THE RULES AND
  REGULATIONS OF THE NORTH CAROLINA
  DEPARTMENT OF ENVIRONMENTAL QUALITY,
  DIVISION OF WATER RESOURCES,
  PUBLIC WATER SUPPLY SECTION. ALL SEWER
  LINES TO BE INSTALLED WITHIN COMPLIANCE
  OF THE RULES AND REGULATIONS OF THE
  NORTH CAROLINA DEPARTMENT OF
  ENVIRONMENT QUALITY, DIVISION OF WATER
  RESOURCES, WATER QUALITY SECTION.
  PERFORM ALL WORK IN ACCORDANCE WITH THE
  APPLICABLE PLUMBING CODES.
- 4. THE UTILITY OWNER OWNS THE EXISTING UTILITY FACILITIES AND WILL OWN THE NEW UTILITY FACILITIES AFTER ACCEPTANCE BY THE DEPARTMENT. THE DEPARTMENT OWNS THE CONSTRUCTION CONTRACT AND HAS ADMINISTRATIVE AUTHORITY. COMMUNICATIONS AND DECISIONS BETWEEN THE CONTRACTOR AND UTILITY OWNER ARE NOT BINDING UPON THE DEPARTMENT OR THIS CONTRACT UNLESS AUTHORIZED BY THE ENGINEER. AGREEMENTS BETWEEN THE UTILITY OWNER AND CONTRACTOR FOR THE WORK THAT IS NOT PART OF THIS CONTRACT OR IS SECONDARY TO THIS CONTRACT ARE ALLOWED, BUT ARE NOT BINDING UPON THE DEPARTMENT.
- 5. PROVIDE ACCESS FOR THE DEPARTMENT PERSONNEL AND THE OWNER'S REPRESENTATIVES TO ALL PHASES OF CONSTRUCTION. NOTIFY DEPARTMENT PERSONNEL AND THE UTILITY OWNER TWO WEEKS PRIOR TO COMMENCEMENT OF ANY WORK AND ONE WEEK PRIOR TO SERVICE INTERRUPTION. KEEP UTILITY OWNERS' REPRESENTATIVES INFORMED OF WORK PROGRESS AND PROVIDE OPPORTUNITY FOR INSPECTION OF CONSTRUCTION AND TESTING.

- 6. THE PLANS DEPICT THE BEST AVAILABLE INFORMATION FOR THE LOCATION, SIZE, AND TYPE OF MATERIAL FOR ALL EXISTING UTILITIES. MAKE INVESTIGATIONS FOR DETERMINING THE EXACT LOCATION, SIZE, AND TYPE MATERIAL OF THE EXISTING FACILITIES AS NECESSARY FOR THE CONSTRUCTION OF THE PROPOSED UTILITIES AND FOR AVOIDING DAMAGE TO EXISTING FACILITIES. REPAIR ANY DAMAGE INCURRED TO EXISTING FACILITIES TO THE ORIGINAL OR BETTER CONDITION AT NO ADDITIONAL COST TO THE DEPARTMENT.
- 7. MAKE FINAL CONNECTIONS OF THE NEW WORK TO THE EXISTING SYSTEM WHERE INDICATED ON THE PLANS, AS REQUIRED TO FIT THE ACTUAL CONDITIONS, OR AS DIRECTED.
- 8. MAKE CONNECTIONS BETWEEN EXISTING AND PROPOSED UTILITIES AT TIMES MOST CONVENIENT TO THE PUBLIC, WITHOUT ENDANGERING THE UTILITY SERVICE, AND IN ACCORDANCE WITH THE UTILITY OWNER'S REQUIREMENTS. MAKE CONNECTIONS ON WEEKENDS, AT NIGHT, AND ON HOLIDAYS IF NECESSARY.
- 9. ALL UTILITY MATERIALS SHALL BE APPROVED PRIOR TO DELIVERY TO THE PROJECT. SEE 1500-7, "SUBMITTALS AND RECORDS" IN SECTION 1500 OF THE STANDARD SPECIFICATIONS.


#### PROJECT SPECIFIC NOTES:


- 1. CONTRACTOR'S ATTENTION IS DIRECTED TO SECTIONS 102, 107, AND 1550 OF THE STANDARD SPECIFICATIONS CONCERNING TRENCH LESS INSTALLATION. IT IS CONTRACTOR'S RESPONSIBILITY TO HAVE BORE DESIGNED AND SEALED BY A LICENSED NORTH CAROLINA PROFESSIONAL ENGINEER. NO DAMAGE IS ALLOWED TO RIVER, WETLANDS, OR BUFFER ZONES.
- 2. THE PROPOSED WATER LINE INSTALLED USING DIRECTIONAL DRILLING SHALL BE DR-9 HDPE AND WITH BUTT-FUSED JOINTS OR DR 18 FUSIBLE PVC PIPES.
- 3. THE INTERNAL DIAMETER OF HDD PIPES SHALL BE EQUAL OR GREATER THAT THE INTERNAL DIAMETER OF THE EXISTING WATER LINE.
- 4. ALL OTHER PROPOSED WATER LINE SHALL BE SDR-21 PVC.
- 5. ALL PIPES AND FITTINGS JOINTS SHALL BE RESTRAINED WITH RESTRAINED JOINTS.
- 6. CONTRACTOR SHALL COORDINATE WITH EDGECOMBE COUNTY PUBLIC UTILITIES FOR SHUTDOWN OF EXISTING WATER LINE.
- 7. THE CONTRACTOR SHALL ALLOW
  SUFFICIENT LENGTHS OF PIPE TO EXTEND
  PAST THE TERMINATION POINT TO ALLOW FOR
  CONTRACTION. PULLED HDD PIPES SHALL BE
  ALLOWED TO RELAX FOR A MINIMUM OF 48
  HOURS OR THE AMOUNT OF TIME RECOMMENDED
  BY THE MANUFACTURER WHICHEVER IS
  GREATER PRIOR TO INITIAL PRESSURE
  TESTING AND MAKING CONNECTIONS.

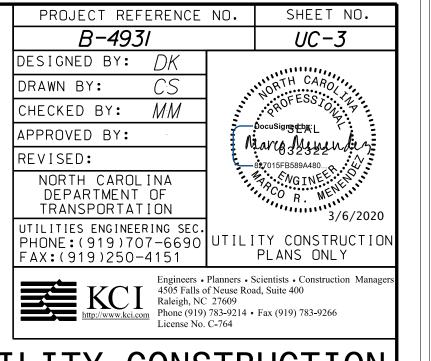


UTILITY CONSTRUCTION
DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

### PROJECT TYPICAL DETAILS

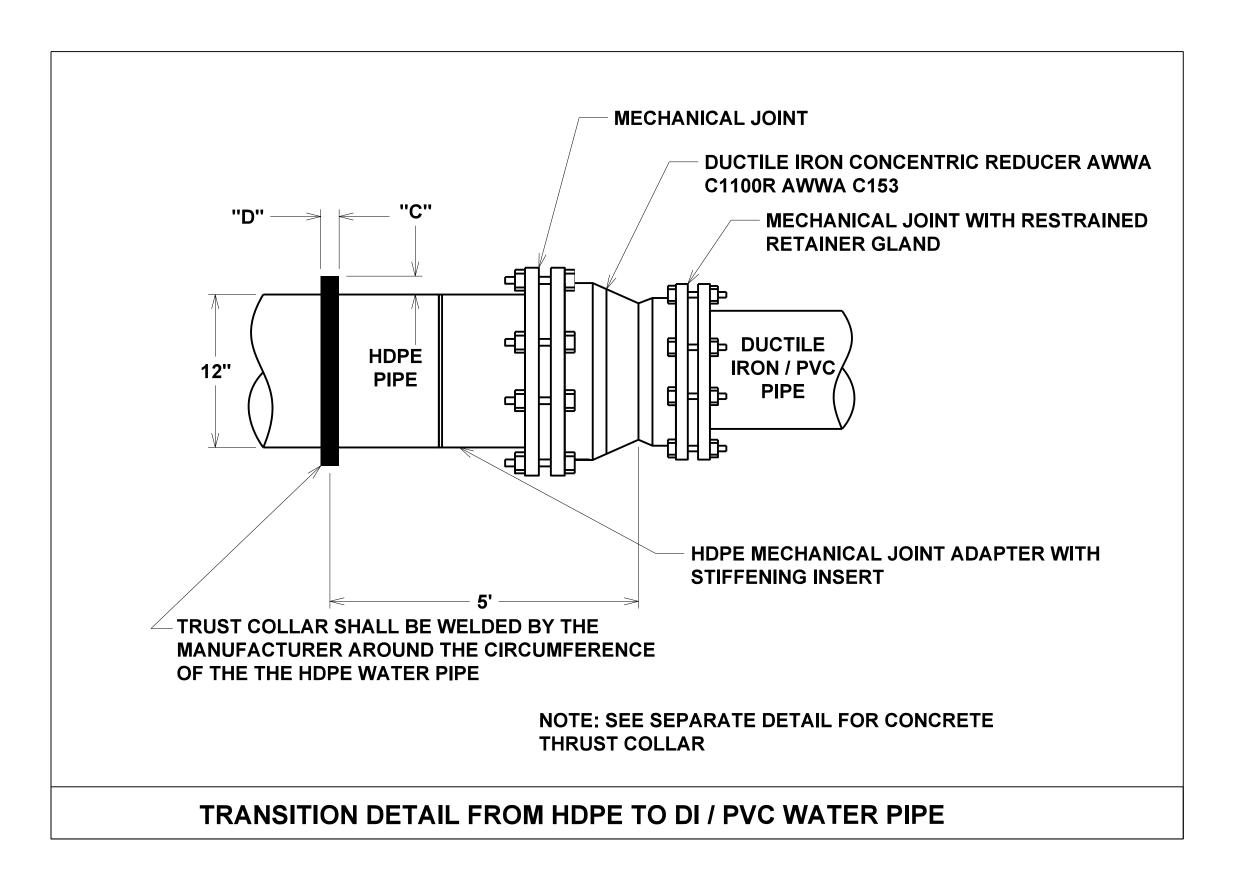

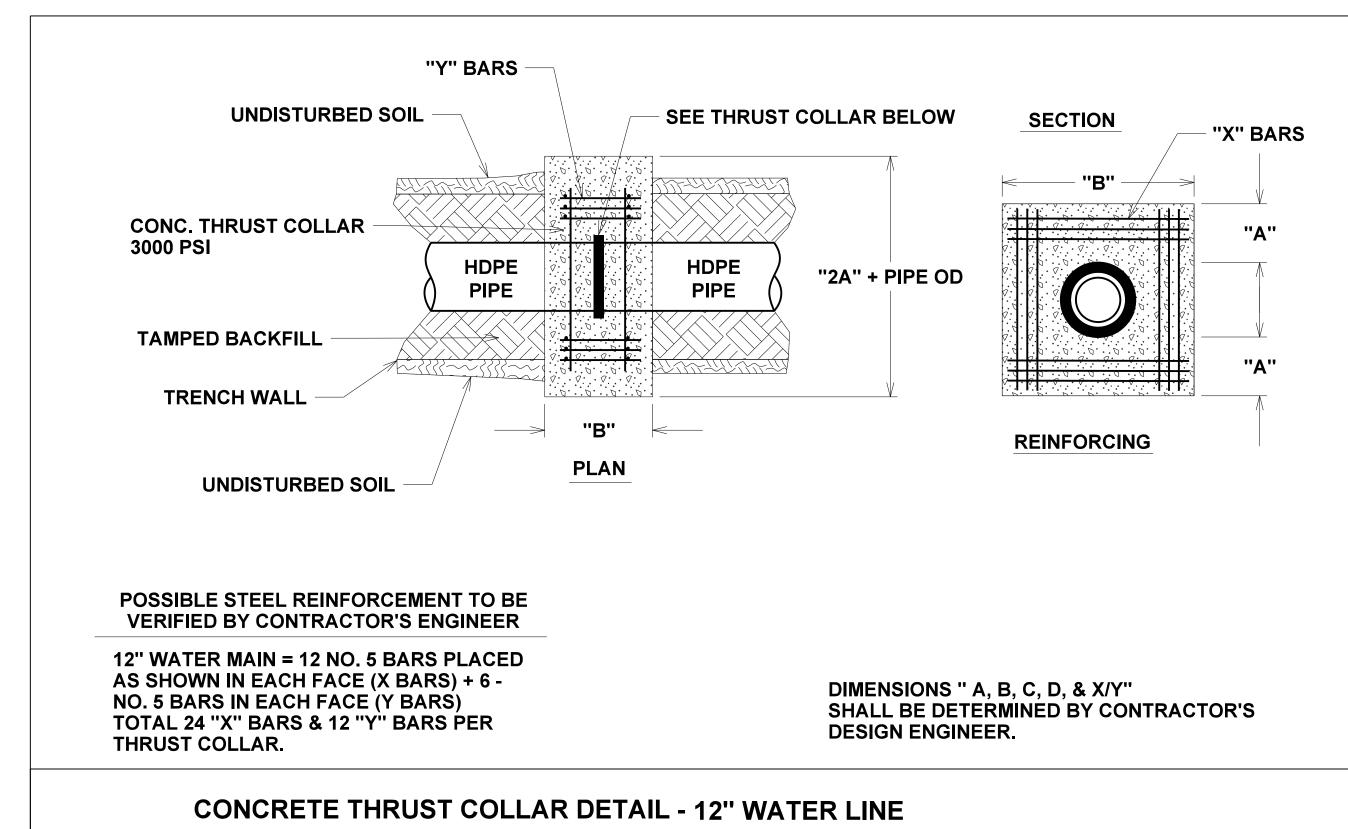


NOTE:
CONTRACTOR TO PROVIDE P. E. SEALED
DESIGNED SHOP DRAWINGS FOR THRUST
COLLARS BASED UPON THE ACTUAL ON-SITE
EXISTING SOILS IN ACCORDANCE WITH THE
LATEST NCDOT STANDARDS AND
SPECIFICATIONS.

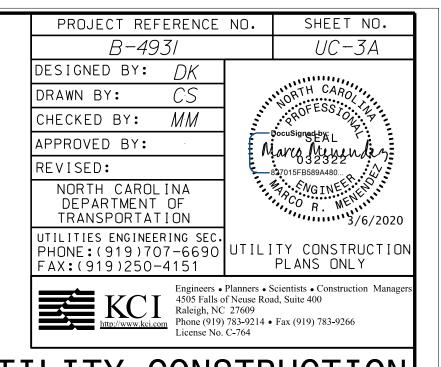


UTILITY CONSTRUCTION
DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED



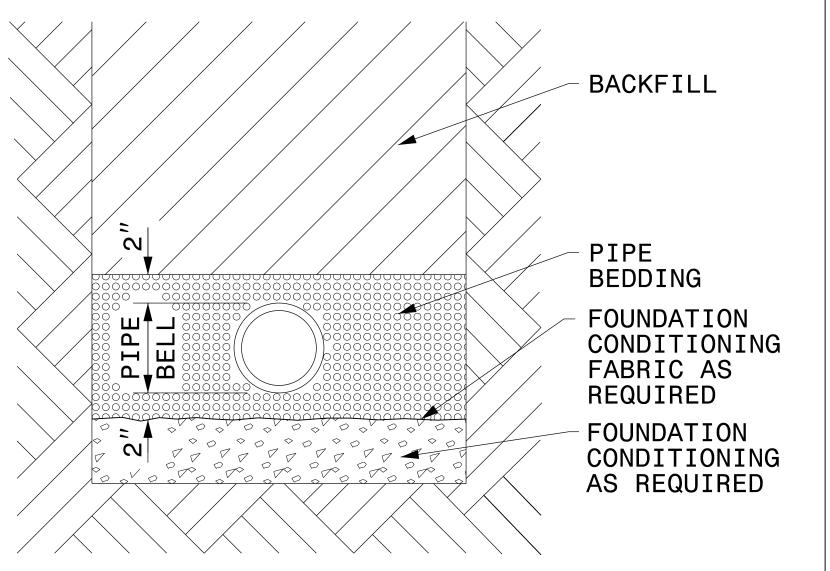


PLACE FOUNDATION CONDITIONING MATERIAL BELOW BEDDING IF REQUIRED, AS DIRECTED BY ENGINEER. PIPE BEDDED IN SELECT MATERIAL, CLASS II (TYPE 1) OR CLASS III. TRENCH BACKFILLED IN LOOSE 6" LAYERS COMPACTED TO TOP OF TRENCH USING LOCAL EXCAVATED MATERIAL IF APPROVED BY THE ENGINEER, OR SELECT MATERIAL. ALL MATERIAL SHALL BE FREE OF ROCKS, FOREIGN MATERIAL, AND FROZEN EARTH. COMPACTION SHALL BE TO APPROXIMATELY 95% DENSITY IN ACCORDANCE WITH AASHTO T-99 AS MODIFIED BY THE DEPARTMENT OF TRANSPORTATION.


## PROJECT TYPICAL DETAILS

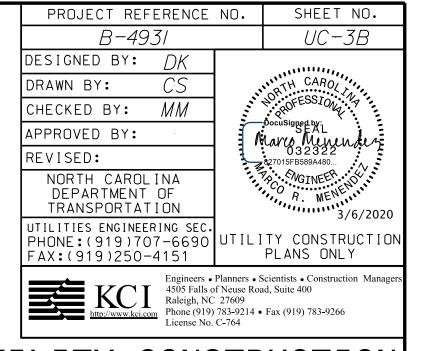

UTILITY CONSTRUCTION

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

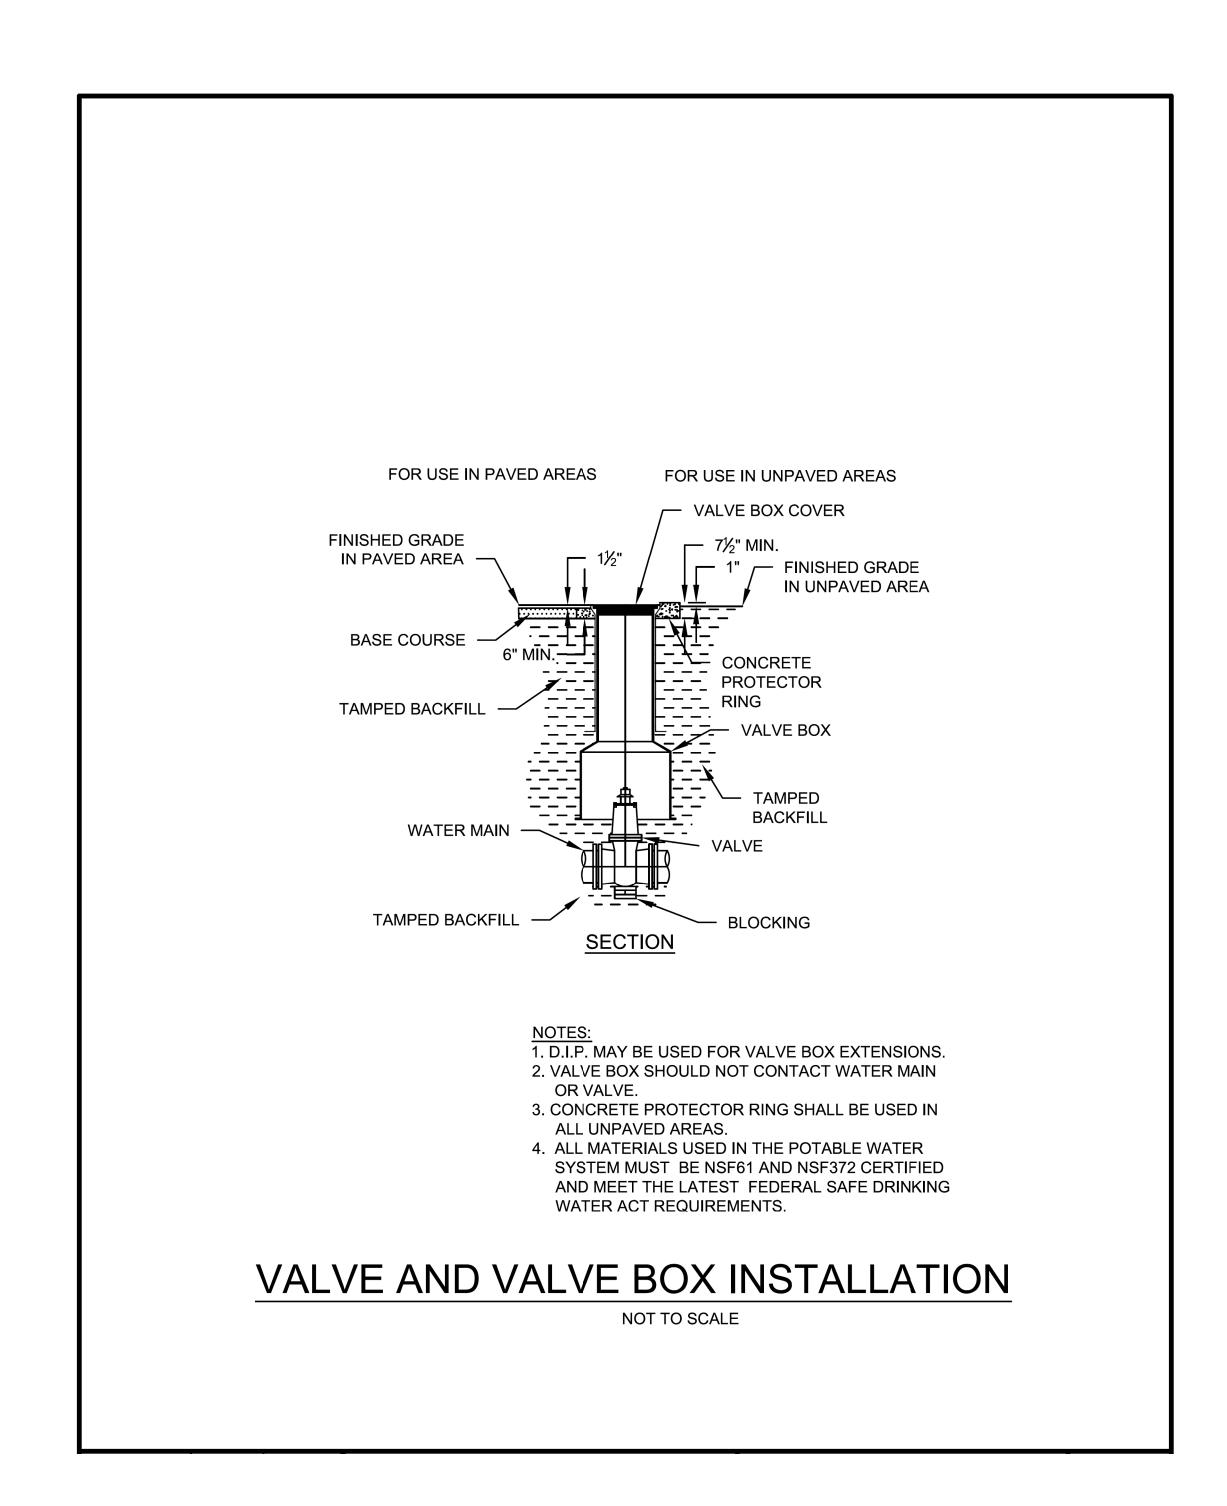

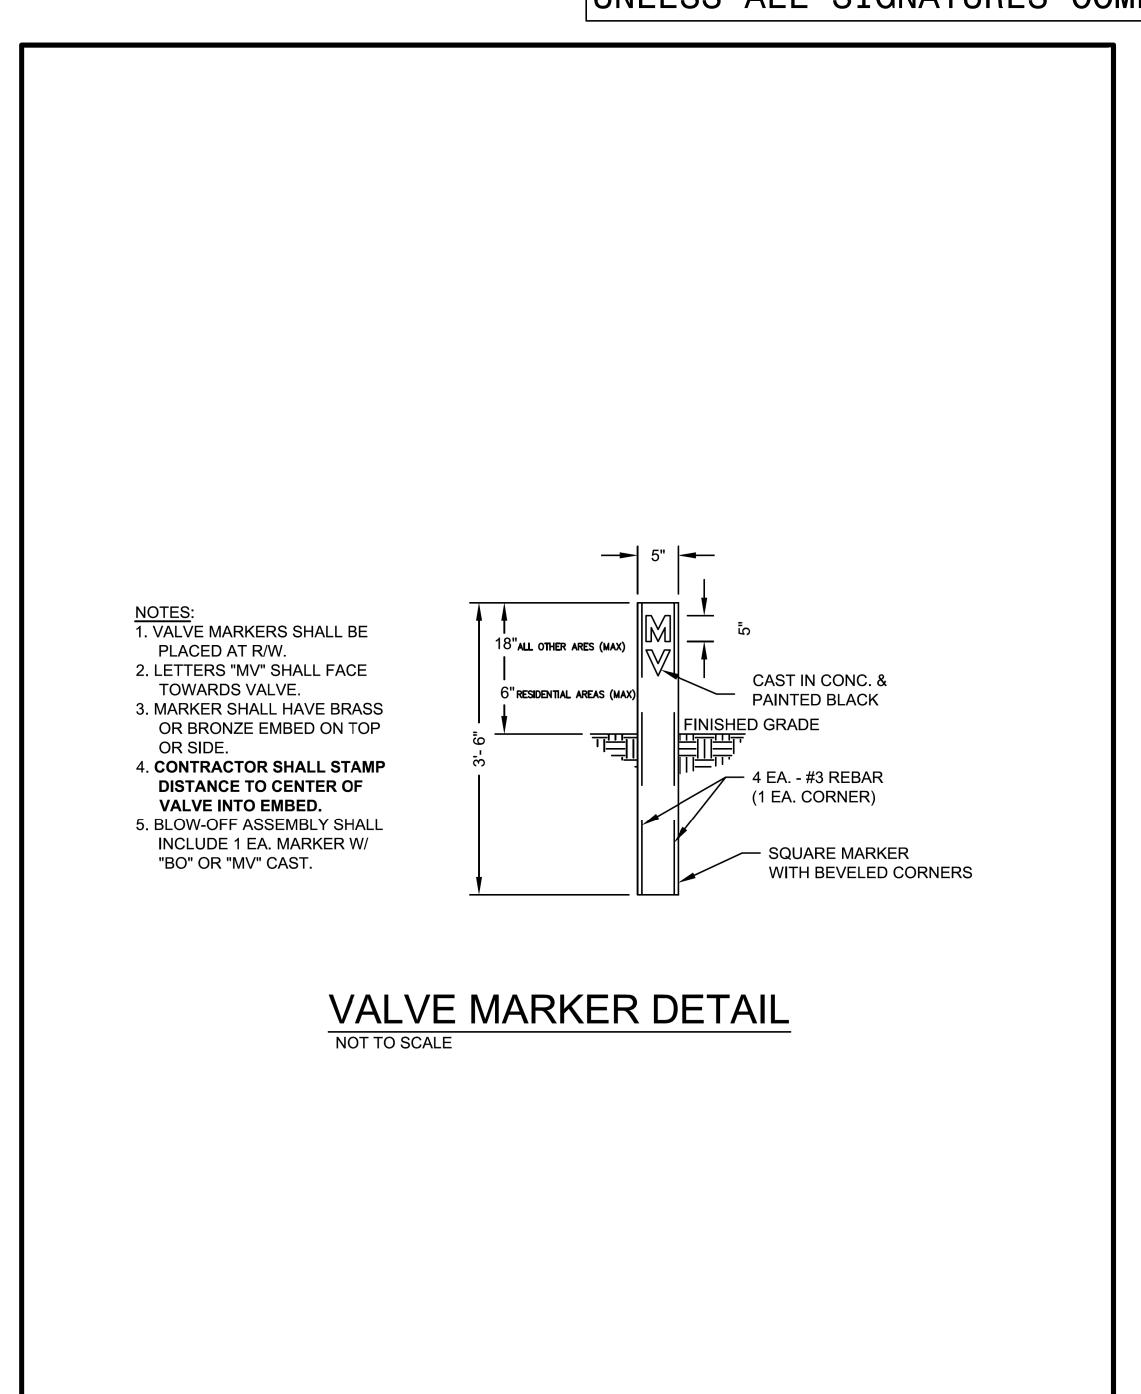

difficiency was tempter\B-4931\_dtls\_UCØ3B.dg

PROJECT REFERENCE NO. B-4931 UC-4 ESIGNED BY: DK RAWN BY: CHECKED BY: MM APPROVED BY: REVISED: NORTH CAROLINA DEPARTMENT OF PRIOR TO COMMENCING ANY WORK ON ANY TRANSPORTATION TRENCHLESS INSTALLATION ON THIS TILITIES ENGINEERING SE PROJECT, PROVIDE A DESIGN FOR THE TILITY CONSTRUCTION PHONE: (919)707-669 TRENCHLESS INSTALLATION CERTIFIED BY AN PLANS ONLY FAX: (919)250-4151 ENGINEER LICENSED BY THE STATE OF NORTH Engineers • Planners • Scientists • Construction Manage 4505 Falls of Neuse Road, Suite 400 Raleigh, NC 27609 CAROLINA, AS REQUIRED BY SUB-ARTICLE 1550-3(B) OF THE STANDARD Phone (919) 783-9214 • Fax (919) 783-9266 SPECIFICATIONS. UTILITY CONSTRUCTION DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED PROPOSED M-J ADAPTOR TRANSITION HDPE TO PVC -W/L- STA. 7+58.72 PROPOSED PVC PIPE TO BE RESTRAINED TO ADAPTOR PROPOSED THRUST COLLAR (SEE DETAIL ON SHEET UC-3A)
-W/L- STA. 7+53.72 PROPOSED 10' X 10' EXIT POINT SLURRY CONTAINMENT PIT PROPOSED 12" 45° BEND -W/L- STA. 9+00.18 LIMITS OF 12" HORIZONTAL DIRECTIONAL DRILL (PLAN VIEW) PROPOSED 10' X 10' ENTRY POINT —— PROPOSED 12" 45°BEND SLURRY CONTAINMENT PIT -W/L- STA. 9+23.32 PROPOSED 728 LF DIRECTIONAL DRILLING OF 12" WATER LINE PROPOSED 12" 45° BEND —— -W/L- STA. 0+16.22 ROBERT EARL WOOTEN, ET. AL. DB II22 PG 50 PROPOSED 929 LF 12" WATER LINE APPROXIMATE LOCATION — PLAT CABINET 2 SLIDE 129A **OF EXISTING VALVE 155 FT** — TIE TO EXISTING 12" PVC WITH A NORTH OF THE BRIDGE 12" RESTRAINED COUPLING **PROPOSED 12" INSERTION VALVE** ABANDON 918 LF 12" UTILITY PIPE TIE TO EXISTING 12" PVC WITH A — 12" RESTRAINED COUPLING PROPOSED 12" INSERTION VALVE PROPOSED PVC PIPE TO BE RESTRAINED TO BEND AND ADAPTOR - PROPOSED M-J ADAPTOR TRANSITION HDPE TO PVC -W/L- STA. 0+19.32 DB 1453 PG 1026 - PROPOSED THRUST COLLAR (SEE DETAIL ON SHEET UC-3A) W/L-STA. 0+24.32 TO ELEV= $44.0^{\circ}$ PLAT CABINET 2 SLIDE 129A FRANCIS L.& RIPRAR PAD AT OUTLET
EST 1 TONS CL. 'B
EST 5 SY GT DOROTHY P. EAGLES RIPRAP PAD AT OUTLET -EST 1 TONS CL. 'B' EST 5 SY GT REVOCABLE TRUST DB 1639 PG 152 DB 1453 PG 1026 APPROXIMATE LOCATION OF EXISTING VALVE 255 FT  $\frac{-L- +55}{\text{EXIST R/W}}$ SOUTH OF THE BRIDGE 60.0' LT EXCAVATION ELEV = 32.0' EXISTING VALVE 5,500' SOUTH OF PROPOSED WATER LINE THE TO EXISTING 24' PAVED ROADWAY 15" W/2 | ELBOWS <u>US\_258\_</u> GREU TL-3 MIN. 8:1 TAPER TB 2GI B SG WD REM. EX. BRIDGE OKEU IL-3 BL-101 RET -EXCAVATION ELEV = 42.5' CONC 1000 T RIPRAP PAD AT OUTLET EST 1 TONS CL. 'B' EST 5 SY GT EXIST. R/W 60.00' RT  $\frac{-L- +00}{EXIST. R/W}$ ANN MOTT CL 'II' RIPRAP TO ELEV = 44.0'DB 94-E PG 482 60.0' RT 60.0′ RT√W ·G<sup>C</sup>364 EXIST R/W EXIST R/W 60.0' RT DONALD R. BRADY, ET. AL. SLIDE 148B 80.0' RT EDGECOMBE COUNTY DB 1201 PG 416 DB 1286 PG 534 RIPRAP PAD AT OUTLET EST 1 TONS CL. 'B' EST 5 SY GT 60.00' RT :- : F880-06'RJ-NO CLAIM SDAVID O. EASOM DB 1636 PG 652 MB 15 PG 28 / 1. APPROXIMATE COORDINATES OF HDD PIPE ENTRY ARE N748071.46, E2417501.10. 2. APPROXIMATE COORDINATES OF HDD PIPE EXIT ARE N748751.17, E2417761.26. 3. THE ORIENTATION OF SLURRY CONTAINMENT PITS SHALL BE SUITABLY LOCATED PROPOSED 1,678 LB OF DUCTILE WITHIN THE RIGHT OF WAY AND WITHOUT CONFLICT WITH EXISTING WATER LINE. IRON WATER PIPE FITTINGS

