


PROJECT REFERENCE NO.	SHEET NO.
R-5020B	EC-08/CONST.08
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 08

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

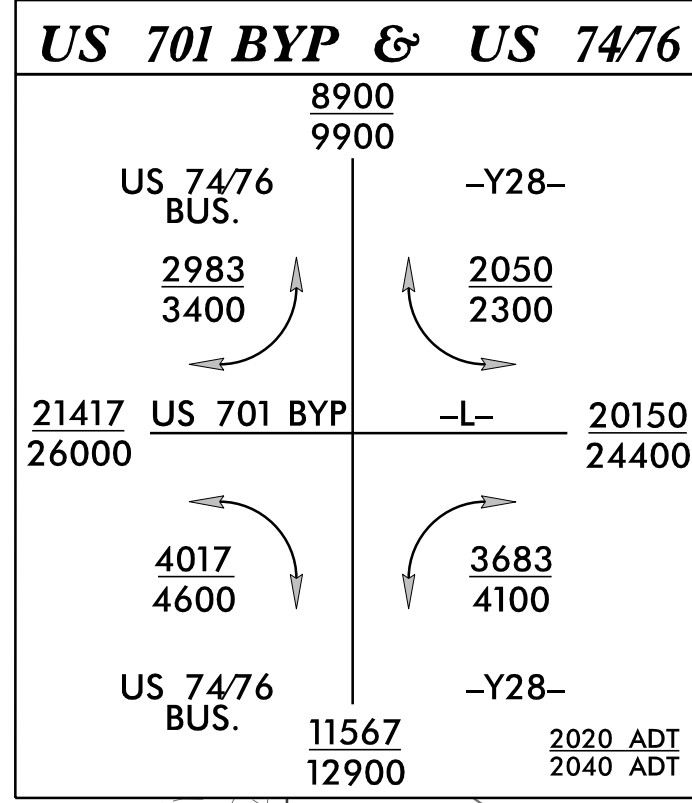


-Y28-
PI Sta 12+83.25
Δ = 8° 56' 07.0" (RT)
D = 2' 23" 14.4"
L = 374.28'
T = 187.52'
R = 2,400.00'

WILLIAMSON HOUSE
NATIONAL REGISTER ELIGIBLE

NAD 83/NA 2011

MATCHLINE -L- STA. 221 +55 SEE SHEET 7

MATCHLINE -L- STA. 235 +40 SEE SHEET 9

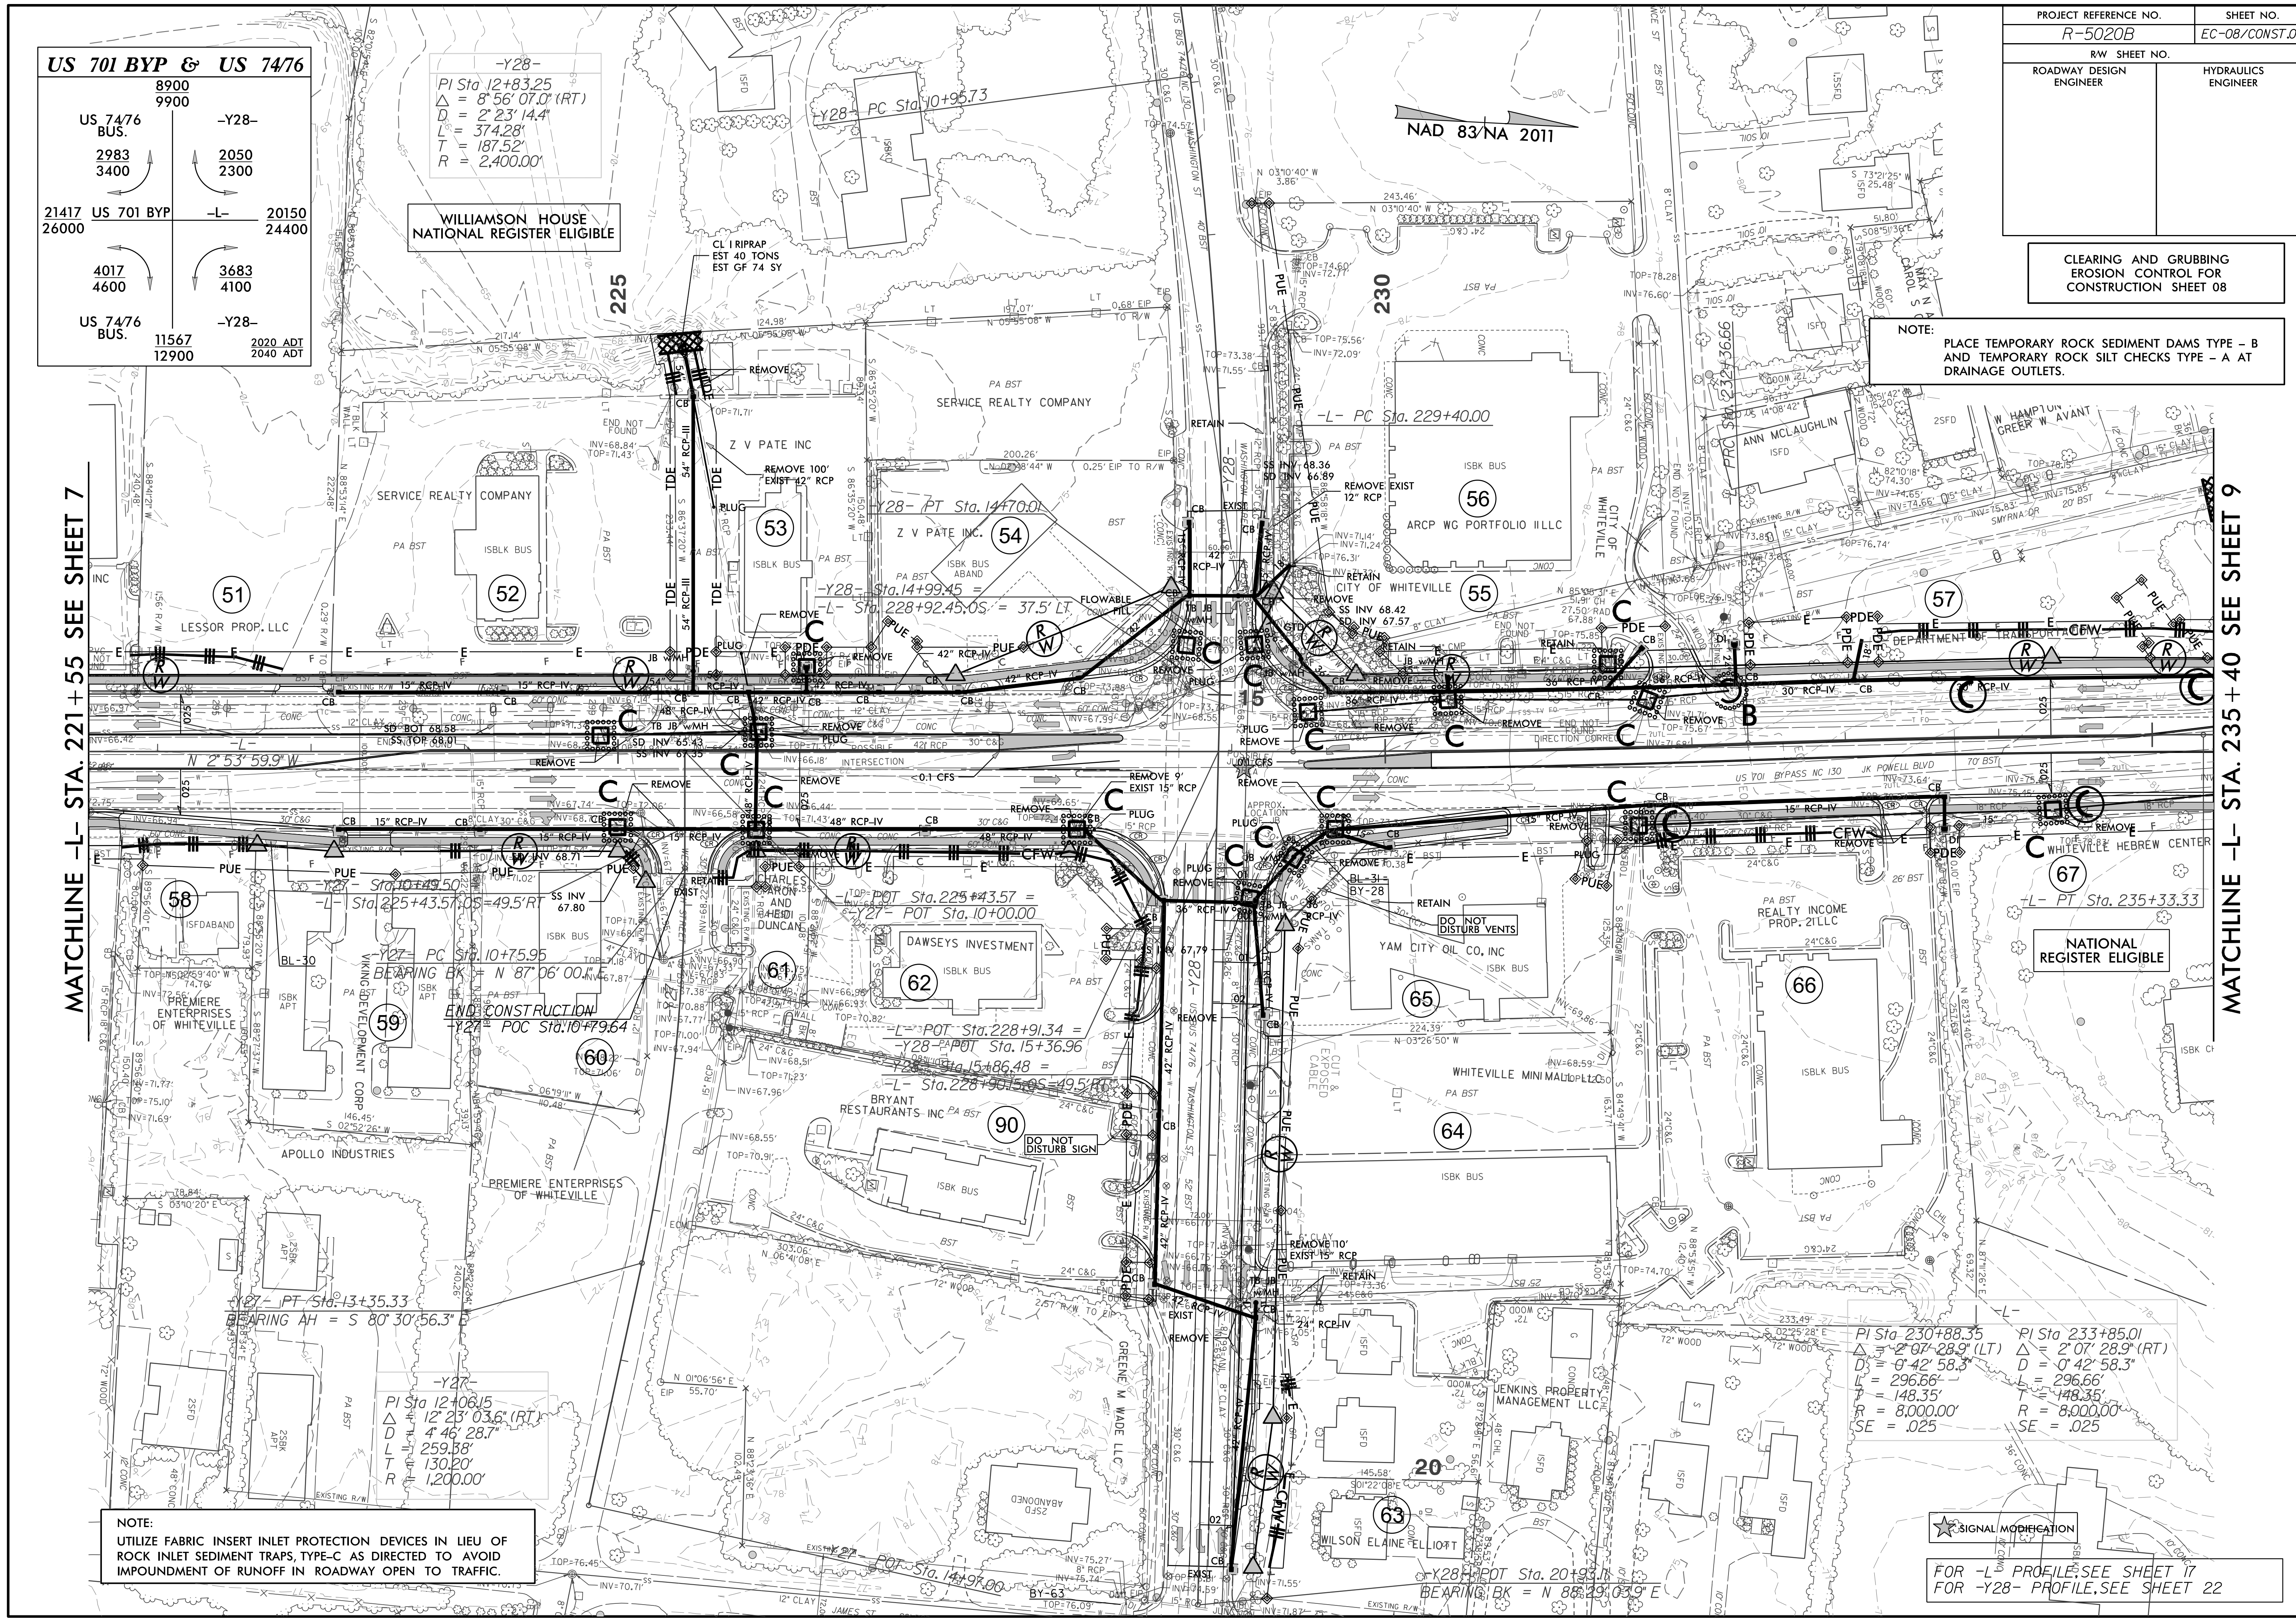

-Y27-
PI Sta 12+06.15
Δ = 12° 25' 03.6" (RT)
D = 4' 46" 28.7"
L = 259.38'
T = 130.20'
R = 1,200.00'

PI Sta 230+88.35
Δ = 2° 07' 28.9" (LT)
D = 0' 42" 58.3"
L = 296.66'
T = 148.35'
R = 8,000.00'
SE = .025

PI Sta 233+85.01
Δ = 2° 07' 28.9" (RT)
D = 0' 42" 58.3"
L = 296.66'
T = 148.35'
R = 8,000.00'
SE = .025

NOTE:
UTILIZE FABRIC INSERT INLET PROTECTION DEVICES IN LIEU OF
ROCK INLET SEDIMENT TRAPS, TYPE-C AS DIRECTED TO AVOID
IMPOUNDMENT OF RUNOFF IN ROADWAY OPEN TO TRAFFIC.

★ SIGNAL MODIFICATION

FOR -L- PROFILE SEE SHEET 17
FOR -Y28- PROFILE SEE SHEET 22