


5/14/99


PAVEMENT SCHEDULE

C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1.5" IN DEPTH OR GREATER THAN 2.0" IN DEPTH
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD. (SEE CONTINUOUSLY REINFORCED CONCRETE PAVEMENT REPAIR DETAIL)
U	EXISTING PAVEMENT
V1	MILLING ASPHALT PAVEMENT (3" DEPTH)
V2	MILLING ASPHALT PAVEMENT (1.5" DEPTH)
Z	MILLED RUMBLE STRIPS


PROJECT REFERENCE NO. 1-6003	SHEET NO. 2A-1
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

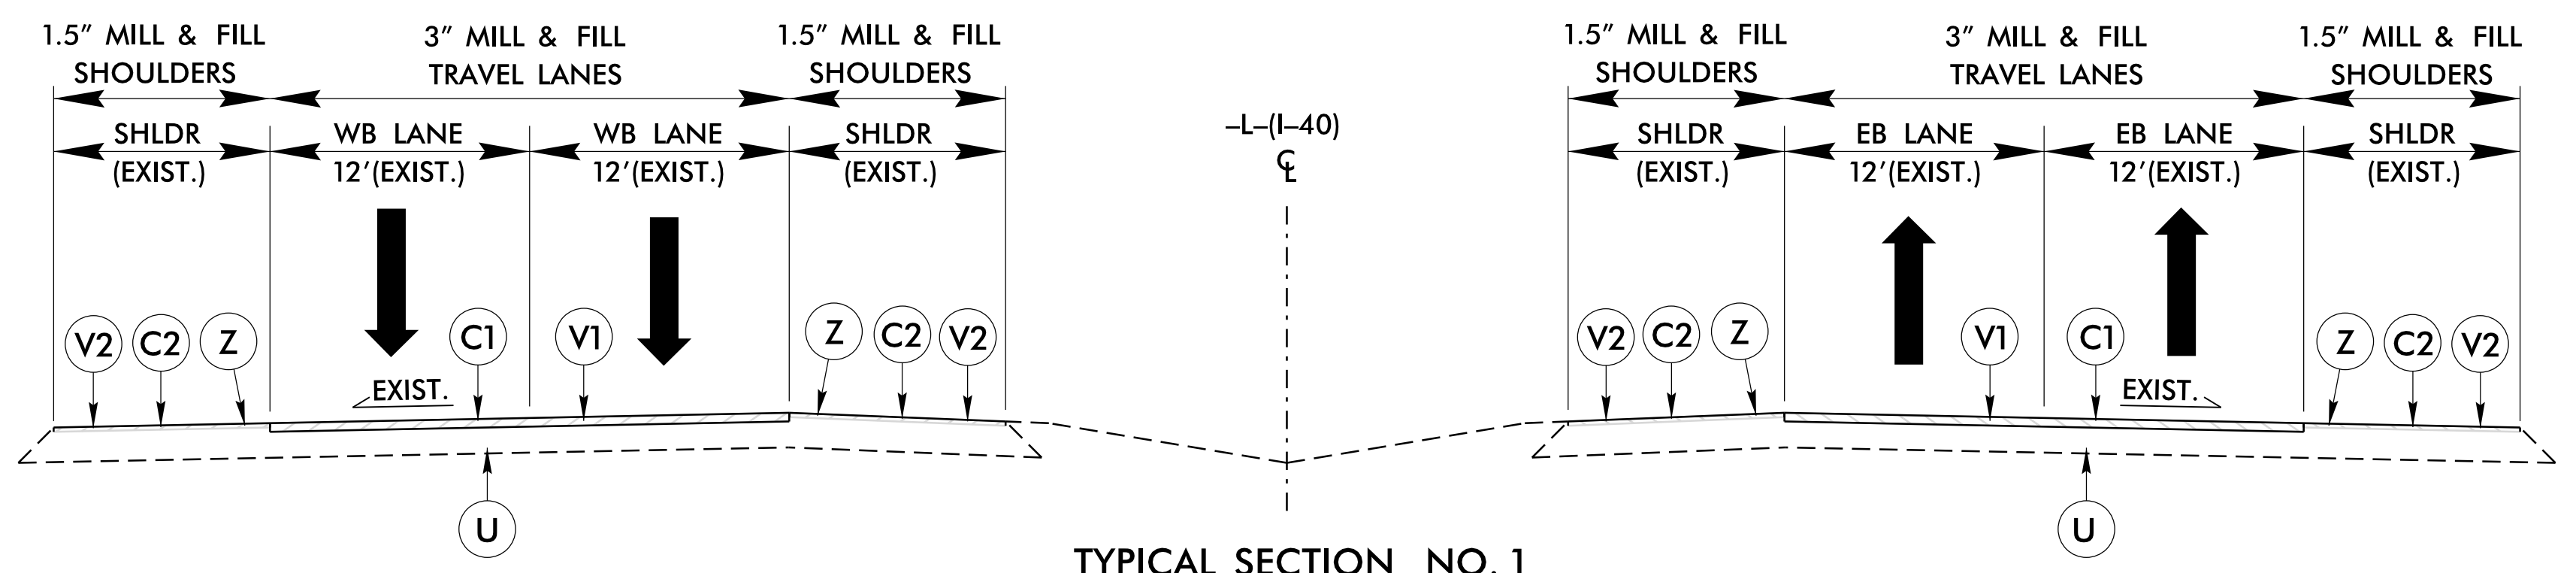

TYPICAL SECTION NO. 1
-L- M.M. 175.48 TO M.M. 179.12

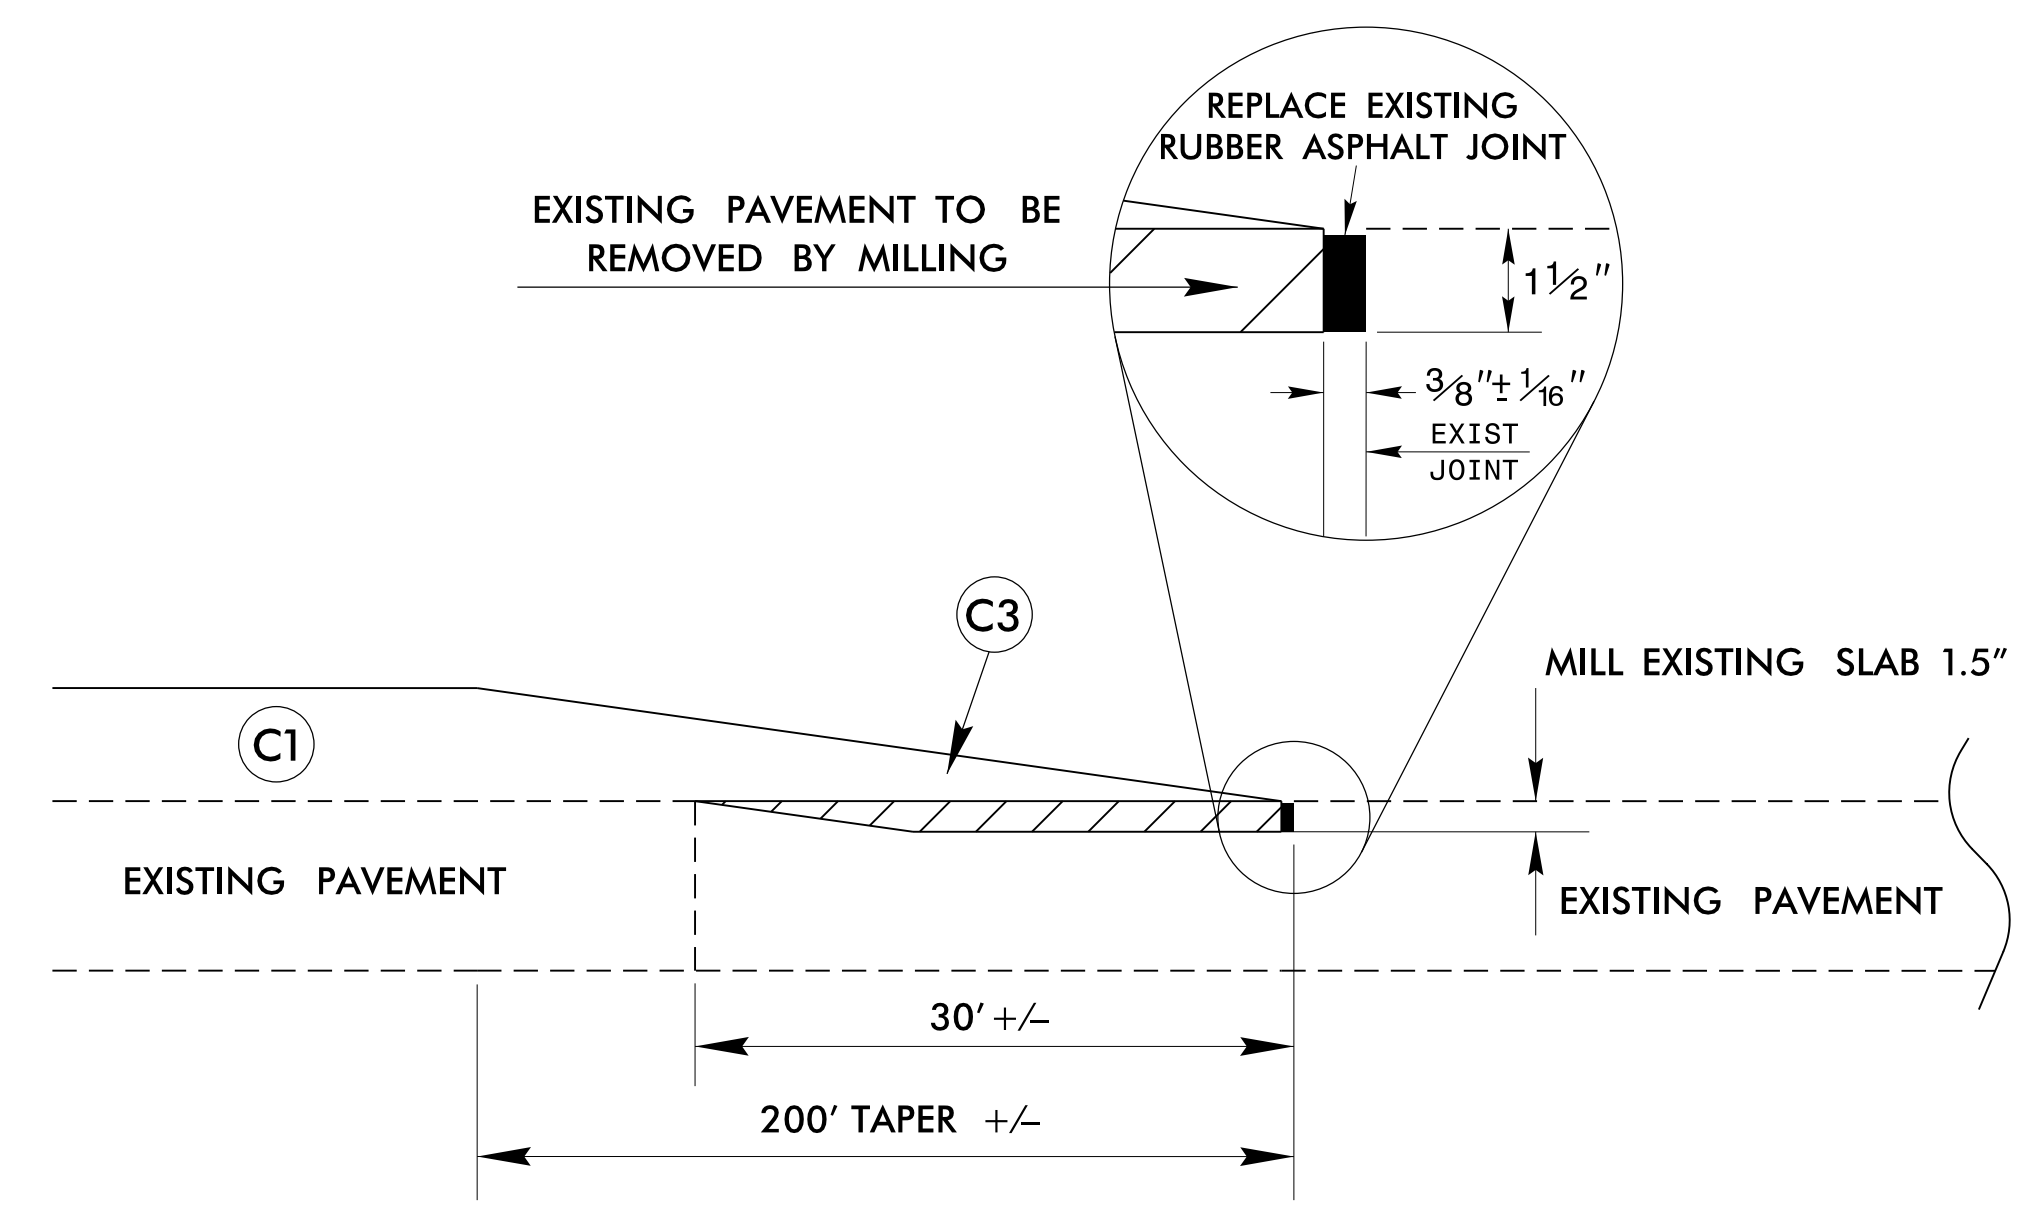

**DETAIL SHOWING TAPERING
AND TIE-INS AT REST AREA RAMPS**

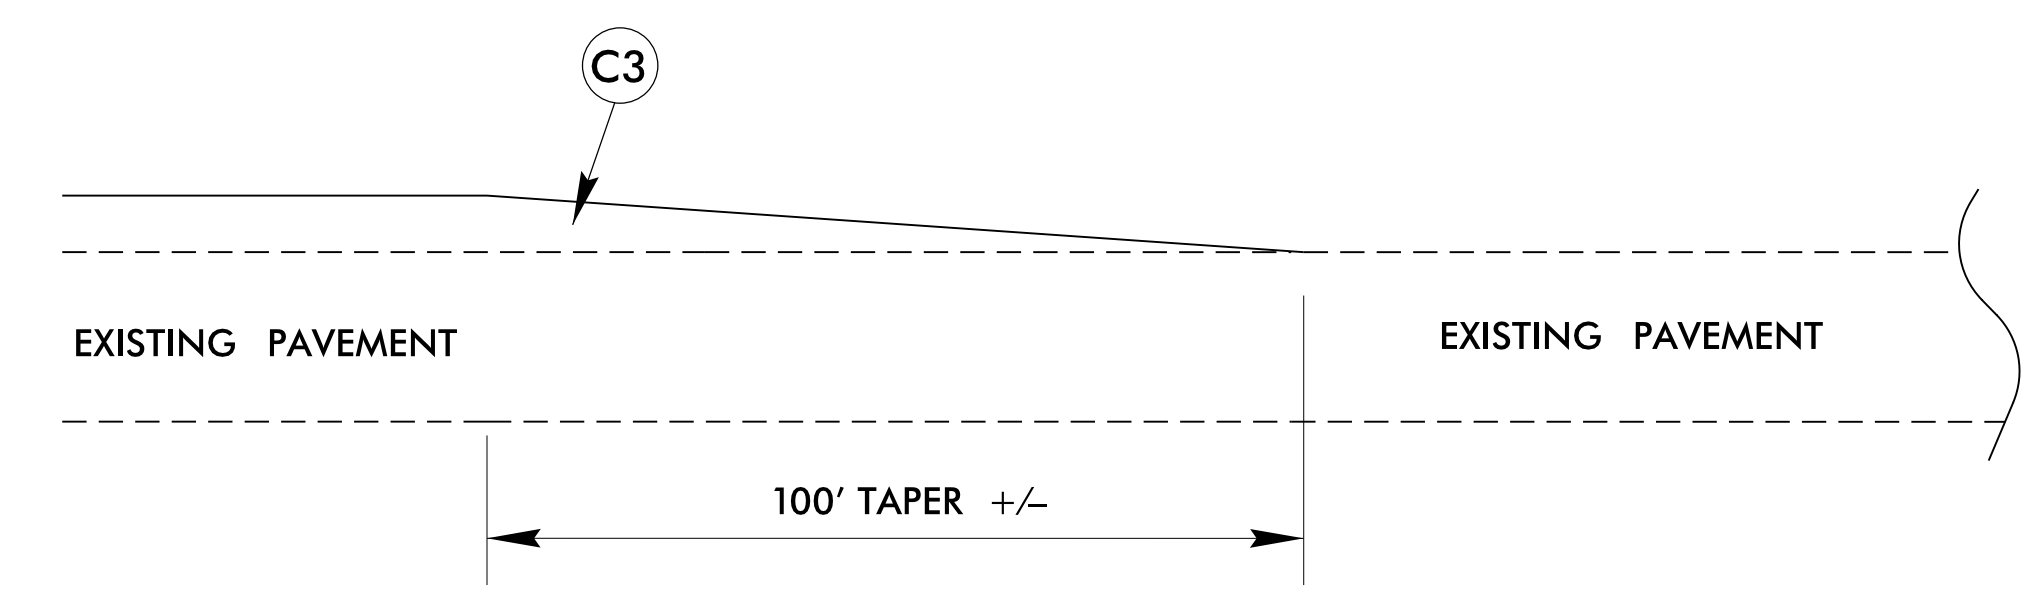

**DETAIL SHOWING TEMPORARY TAPERING
AND TIE-INS DURING CONSTRUCTION**

I:\TIP_P19-JUL-2007\16003-140Rehab-Davie\Roadway\16003_dcc-2A_tjpr.dgn
 \$\$\$\$\$\$
 \$\$\$\$\$\$