

WBS ELEMENT SHEET NO.

12
2022CPT.08.11.10631
2022CPT.08.11.20631

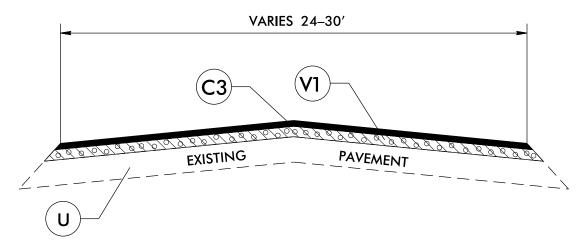

TYPICAL SECTION NO. 1

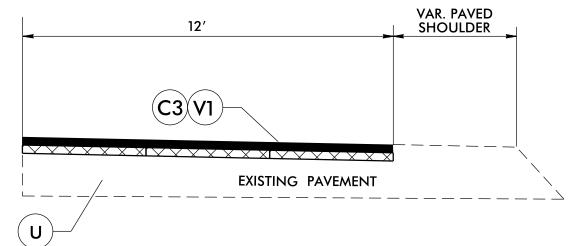

TYPICAL SECTION NO. 2

NOTE: USE ON MAP #2, SB OUTSIDE LANE ONLY MILLING AND RESURFACING FROM SKIP CENTER LINE TO EDGE LINE, DO NOT INCLUDE PAVED SHOULDER

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5B, AT AN AVERAGE RATE OF 220 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
F1	PROP. ASPHALT SURFACE TREATMENT, MATCOAT, #67 STONE.
F2	PROPOSED ASPHALT SURFACE TREATMENT, DOUBLE SEAL
S	AGGREGATE SHOULDER BORROW (BY STATE FORCES)
U	EXISTING PAVEMENT.
V1	MILLING 1.5" IN DEPTH
V2	TRENCHING FOR BASE COURSE (SEE S.P.)