


EDI MODEL 2010ECL-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumper and set switches as shown)

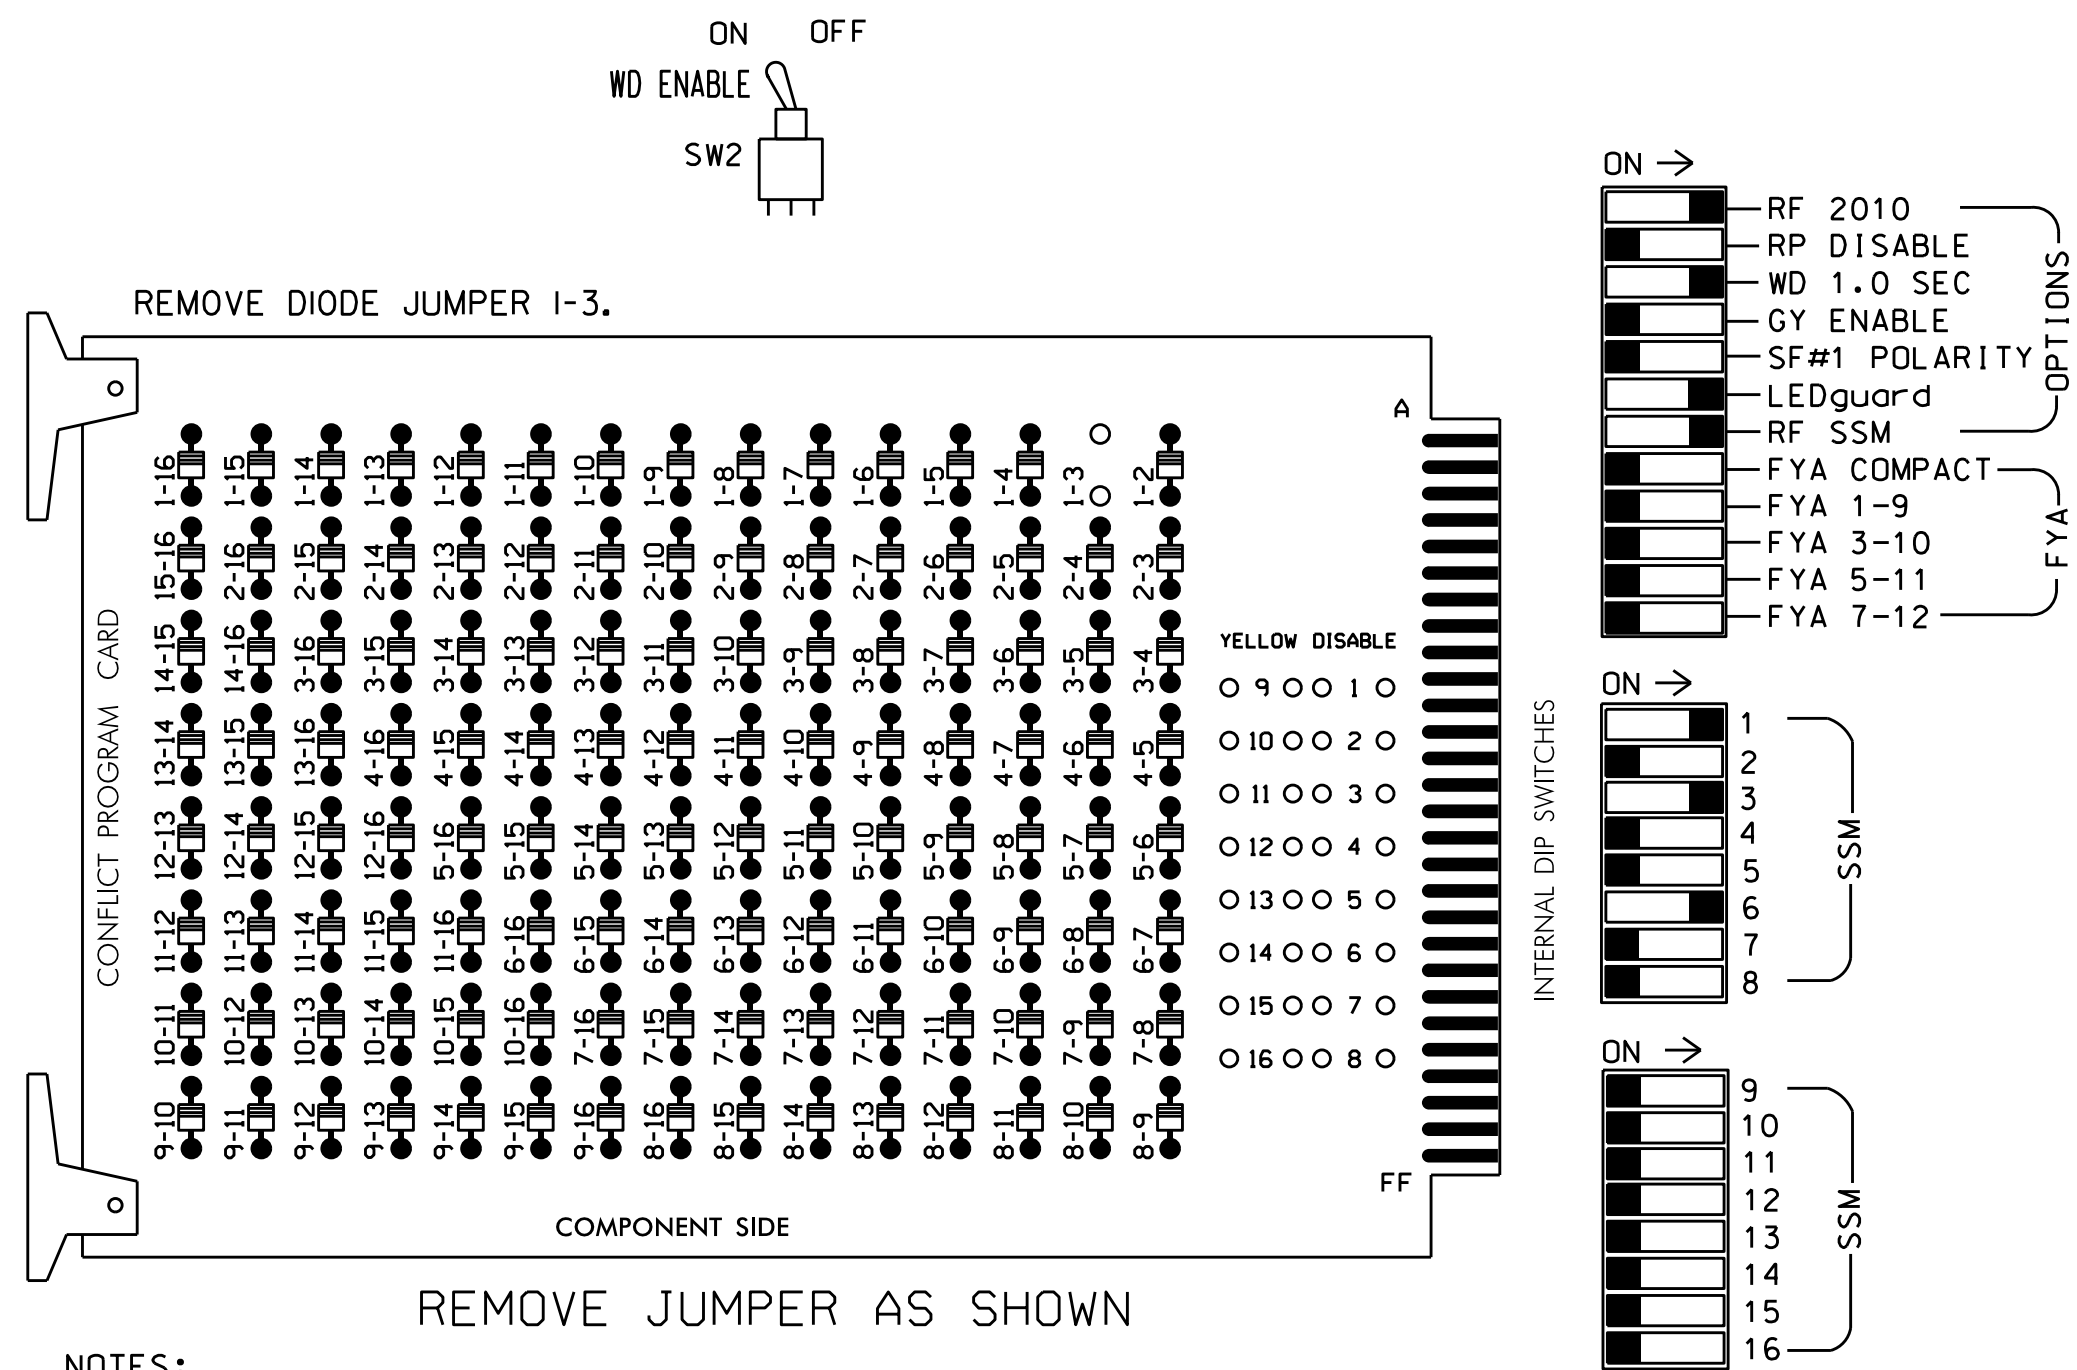

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Make sure jumpers SEL2-SEL5 are present on the monitor board.

■ = DENOTES POSITION OF SWITCH

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Ensure that Red Enable is active at all times during normal operation. To prevent Red Failures on unused monitor channels, tie unused red monitor inputs 2,4,5,7,8, 9,10,11,12,13,14,15 & 16 to load switch AC+ per the cabinet manufacturer's instructions.
- Enable Simultaneous Gap-Out for all Phases.
- Program phase 6 for Variable Initial and Gap Reduction.
- Program phase 6 for Startup In Green.
- Program phase 6 for Yellow Flash.
- If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
- The cabinet and controller are part of the US 17 (Ocean Highway) - Leland Superstreet D03-02 Leland System.

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S2P	S3	S4	S4P	S5	S6	S6P	S7	S8	S8P
PHASE	* OLG	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	33	NU	NU	31,32	NU	NU	NU	61,62	NU	NU	NU	NU
RED								134				
YELLOW								135				
GREEN								136				
RED ARROW	125			116								
YELLOW ARROW	126			117								
GREEN ARROW	127			118								

NU = Not Used

* * Requires special programming and output remapping. See sheet 2.

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S1,S3,S6
 PHASES USED.....3,6
 OVERLAP'G'.....3

INPUT FILE POSITION LAYOUT

(front view)

FILE	1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	FS	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3	∅ 3
L	DC ISOLATOR	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED
U	FS	SYS. DET. S28	∅ 6/SYS 6A/S29	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS
L	DC ISOLATOR	NOT USED	∅ 6/SYS 6B/S30	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS	∅ 6/SYS

EX. : 1A, 2A, ETC. = LOOP NO.'S


FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
3A	TB2-5,6	J2U	39	1	2	3	Y	Y			
* S28	TB3-5,6	J2U	40	2	6	SYS					
6A/S29	TB3-9,10	J3U	64	26	36	6/SYS	Y	Y			
6B/S30	TB3-11,12	J3L	77	39	46	6/SYS	Y	Y			

* System detector only. Remove the vehicle phase assigned to this detector in the default programming.

INPUT FILE POSITION LEGEND: J2L



THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 03-0980
 DESIGNED: October 2021
 SEALED: 10/26/2021
 REVISED: N/A

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISION SEAL

DocuSigned by: Ryan W. Hough
 11/15/2021

Electrical Detail - Sheet 1 of 2

Electrical and Programming Details for: **US 17 (Ocean Highway) at Brunswick Forest North U-Turn**

Prepared In the Offices of: **Signal Management Solutions**

Division 3 Brunswick County Leland

PLAN DATE: June 2019 REVIEWED BY: DTJ

PREPARED BY: B. Christian REVIEWED BY:

REVISIONS: Removed loops 3B and 3C and added a note. (WSA) RWH 11/15/21

Not a certified document as to the Original Document but only as to the Revisions - This document originally issued and sealed by D. Todd Joyce, #031001, on 6/19/2019. This document is only certified as to the revisions.

SIG. INVENTORY NO. 03-0980

I:\Signal\Workshops\Signal Management Solutions\Projects\03-0980\03-0980_Sig.dgn
 15-Nov-2021 1:57 PM
 S:\Signal\Workshops\Signal Management Solutions\Projects\03-0980\03-0980_Sig.dgn