

REFERENCE: U-2579AB

PROJECT: 34839

CONTENTS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3-6	PLAN & PROFILE SHEETS
7-12	BORELOGS

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY FORSYTH
PROJECT DESCRIPTION WINSTON-SALEM BELTWAY
FROM US 421/I-40 BUS TO I-40

SITE DESCRIPTION SOUND WALL 24/25

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	U-2579AB	1	12

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTES:

- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
- BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

A. SUTTLE, G.I.T.

TOTAL DEPTH DRILLING

J. GARRICK, G.I.T.

E. SUSANTO

P. DONNELLY

INVESTIGATED BY ECS SOUTHEAST, LLP

DRAWN BY K. DE MONTBRUN, P.E.

CHECKED BY M. WALKO, P.E.

SUBMITTED BY ECS SOUTHEAST, LLP

DATE JULY 2021

Prepared in the Office of:



ECS SOUTHEAST, LLP
1812 CENTER PARK DRIVE, SUITE D
CHARLOTTE, NC 28217
(704) 525-5152 [PHONE]
(704) 357-0023 [FAX]
NC REGISTERED
ENGINEERING
FIRM # F-1078



DocuSigned by:

Kelly de Montbrun 7/13/2021

7BDD9976E22C480

SIGNATURE

DATE

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SUBSURFACE INVESTIGATION
 SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION
 SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, *VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6*

SOIL LEGEND AND AASHTO CLASSIFICATION

GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)							SILT-CLAY MATERIALS (> 35% PASSING #200)							ORGANIC MATERIALS		
	A-1	A-3	A-2	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7		
GROUP CLASS.	A-1-a	A-1-b	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7			
SYMBOL	[Patterned boxes for granular materials]							[Patterned boxes for silt-clay materials]							[Patterned boxes for organic materials]		
% PASSING #10 #40 #200	[Values for granular materials]							[Values for silt-clay materials]							[Values for organic materials]		
MATERIAL PASSING #40 LL PI	[Values for granular materials]							[Values for silt-clay materials]							[Values for organic materials]		
GROUP INDEX	[Values for granular materials]							[Values for silt-clay materials]							[Values for organic materials]		
USUAL TYPES OF MAJOR MATERIALS	[Descriptions for granular materials]							[Descriptions for silt-clay materials]							[Descriptions for organic materials]		
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD							FAIR TO POOR							FAIR TO POOR, POOR, UNSUITABLE		

CONSISTENCY OR DENSENESS

PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4

TEXTURE OR GRAIN SIZE

U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270
	4.76	2.00	0.42	0.25	0.075	0.053
BOULDER (BLDR.)						
COBBLE (COB.)						
GRAVEL (GR.)						
COARSE SAND (CS, SD.)						
FINE SAND (F SD.)						
SILT (SL.)						
CLAY (CL.)						

SOIL MOISTURE - CORRELATION OF TERMS

SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION
LL	LIQUID LIMIT	
PL	PLASTIC LIMIT	
OM	OPTIMUM MOISTURE SHRINKAGE LIMIT	
	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE
	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE

PLASTICITY

	PLASTICITY INDEX (PI)	DRY STRENGTH
NON PLASTIC	0-5	VERY LOW
SLIGHTLY PLASTIC	6-15	SLIGHT
MODERATELY PLASTIC	16-25	MEDIUM
HIGHLY PLASTIC	26 OR MORE	HIGH

COLOR
 DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.

GRADATION
WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE.
UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE.
GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.

ANGULARITY OF GRAINS
 THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: **ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.**

MINERALOGICAL COMPOSITION
 MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.



COMPRESSIBILITY
 SLIGHTLY COMPRESSIBLE LL < 31
 MODERATELY COMPRESSIBLE LL = 31 - 50
 HIGHLY COMPRESSIBLE LL > 50

PERCENTAGE OF MATERIAL

	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE

GROUND WATER

▽ WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING
 ▽ STATIC WATER LEVEL AFTER 24 HOURS
 ▽ PW PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA
 ○ SPRING OR SEEP

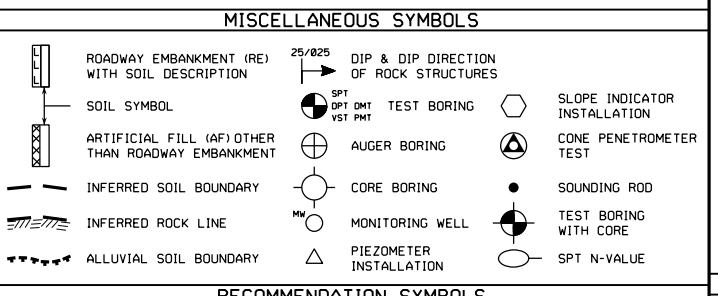

ABBREVIATIONS

AR - AUGER REFUSAL
 BT - BORING TERMINATED
 CL - CLAY
 CPT - CONE PENETRATION TEST
 CSE - COARSE
 DMT - DILATOMETER TEST
 DPT - DYNAMIC PENETRATION TEST
 e - VOID RATIO
 F - FINE
 FOSS. - FOSSILIFEROUS
 FRAC. - FRACTURED, FRACTURES
 FRAGS. - FRAGMENTS
 HI. - HIGHLY

MED. - MEDIUM
 MICA - MICACEOUS
 MOD. - MODERATELY
 NP - NON PLASTIC
 ORG. - ORGANIC
 PMT - PRESSUREMETER TEST
 SAP. - SAPROLITIC
 SD. - SAND, SANDY
 SL. - SILT, SILTY
 SLI. - SLIGHTLY
 TCR - TRICONE REFUSAL
 w - MOISTURE CONTENT
 V - VERY

VST - VANE SHEAR TEST
 WEA. - WEATHERED
 UG - UNIT WEIGHT
 UG - DRY UNIT WEIGHT

SAMPLE ABBREVIATIONS

S - BULK
 SS - SPLIT SPOON
 ST - SHELBY TUBE
 RS - ROCK
 RT - RECOMPACTED TRIAXIAL
 CBR - CALIFORNIA BEARING RATIO

EQUIPMENT USED ON SUBJECT PROJECT

DRILL UNITS:
 CME-45C
 CME-55
 CME-550
 VANE SHEAR TEST
 PORTABLE HOIST
 CME-75


ADVANCING TOOLS:
 CLAY BITS
 6" CONTINUOUS FLIGHT AUGER
 8" HOLLOW AUGERS
 HARD FACED FINGER BITS
 TUNG-CARBIDE INSERTS
 CASING W/ ADVANCER
 TRICONE * STEEL TEETH
 TRICONE * TUNG-CARB.
 CORE BIT

HAMMER TYPE:
 AUTOMATIC MANUAL

CORE SIZE:
 -B -H -N

HAND TOOLS:
 POST HOLE DIGGER
 HAND AUGER
 SOUNDING ROD
 VANE SHEAR TEST

ROCK DESCRIPTION
 HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:

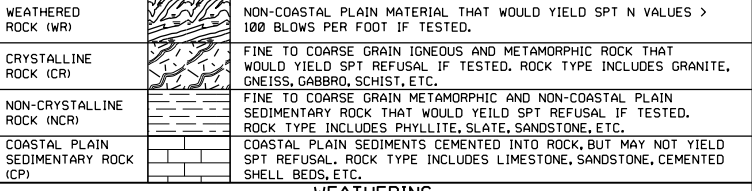

WEATHERING

FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.

VERY SLIGHT (V SL.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.

SLIGHT (SL.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.

MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.

MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. *IF TESTED, WOULD YIELD SPT REFUSAL*

SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. *IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF*

VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. *IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF*

COMPLETE ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. FABRIC MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.

ROCK HARDNESS

VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.

HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.

MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.

MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.

SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.

VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.

TERM	FRACTURE SPACING		BEDDING	
	SPACING	THICKNESS	TERM	THICKNESS
VERY WIDE	MORE THAN 10 FEET	4 FEET	VERY THICKLY BEDDED	4 FEET
WIDE	3 TO 10 FEET	1.5 - 4 FEET	THICKLY BEDDED	1.5 - 4 FEET
MODERATELY CLOSE	1 TO 3 FEET	0.16 - 1.5 FEET	THINLY BEDDED	0.16 - 1.5 FEET
CLOSE	0.16 TO 1 FOOT	0.03 - 0.16 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET
VERY CLOSE	LESS THAN 0.16 FEET	< 0.03 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET
			THINLY LAMINATED	< 0.008 FEET

INDURATION
 FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.

FRIABLE RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.

MODERATELY INDURATED GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.

INDURATED GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.

EXTREMELY INDURATED SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.

TERMS AND DEFINITIONS

ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER.

AQUIFER - A WATER BEARING FORMATION OR STRATA.

ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND.

ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC.

ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE.

CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE.

COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE.

CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.

DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK.

DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL.

DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH.

FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE.

FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES.

FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL.

FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM.

FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD.

JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED.

LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT.

LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS.

MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE.

PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM.

RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK.

ROCK QUALITY DESIGNATION (ROQ) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.

SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK.

SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS.

SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE.

STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS.


STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE.

STRATA ROCK QUALITY DESIGNATION (SROQ) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE.

TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.



ELEVATION: N/A FEET

NOTES:
 ROADWAY DESIGN FILES, .TIN, AND GPK FILE PROVIDED BY NCDOT
 NORTHING AND EASTING OBTAINED USING A TRIMBLE GEO7X.
 ELEVATIONS OBTAINED USING PROVIDED SURVEY INFORMATION.
 FIAD= FILLED IN AFTER DRILLING

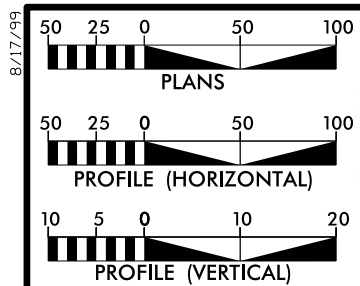


PLAN AND PROFILE OF NOISE WALL 24/25

PROJECT REFERENCE NO. U-2579AB	SHEET NO. 5
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

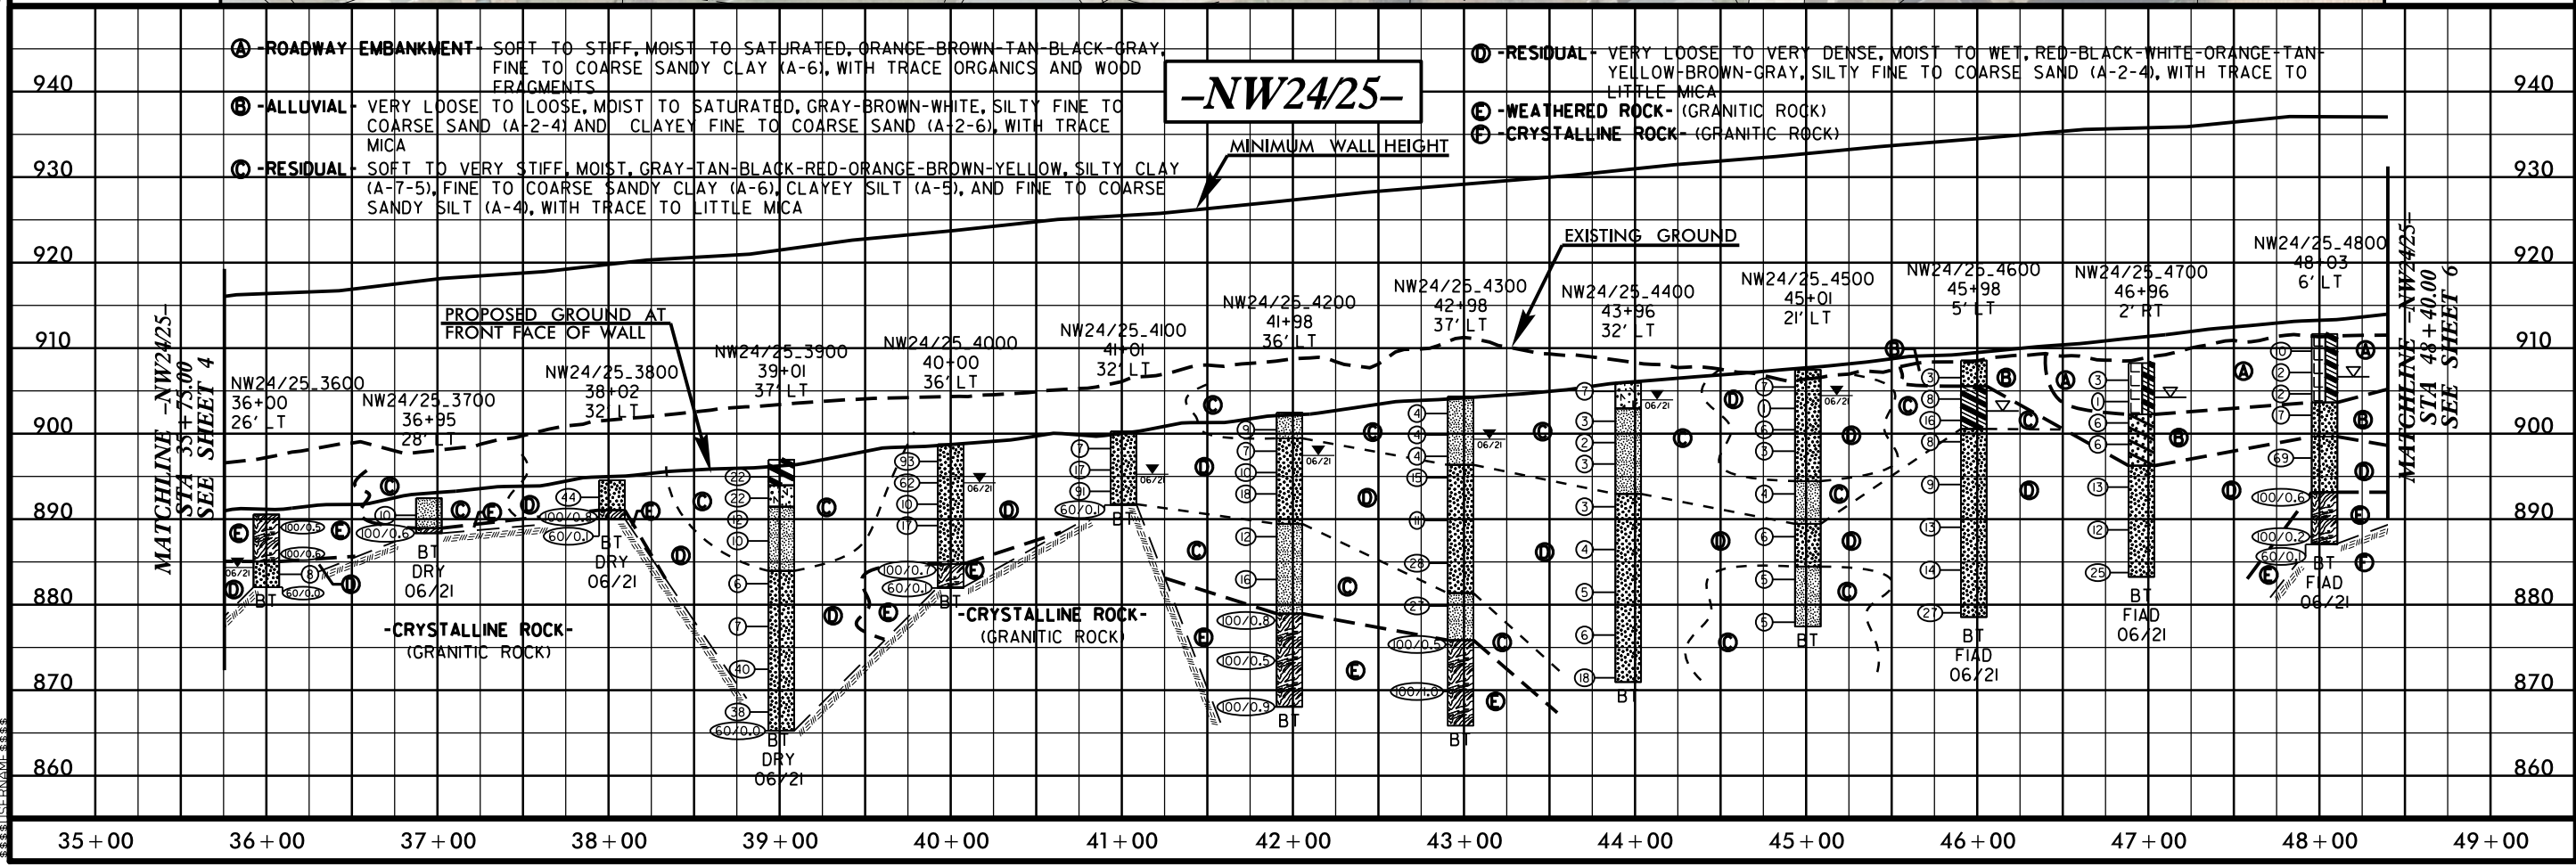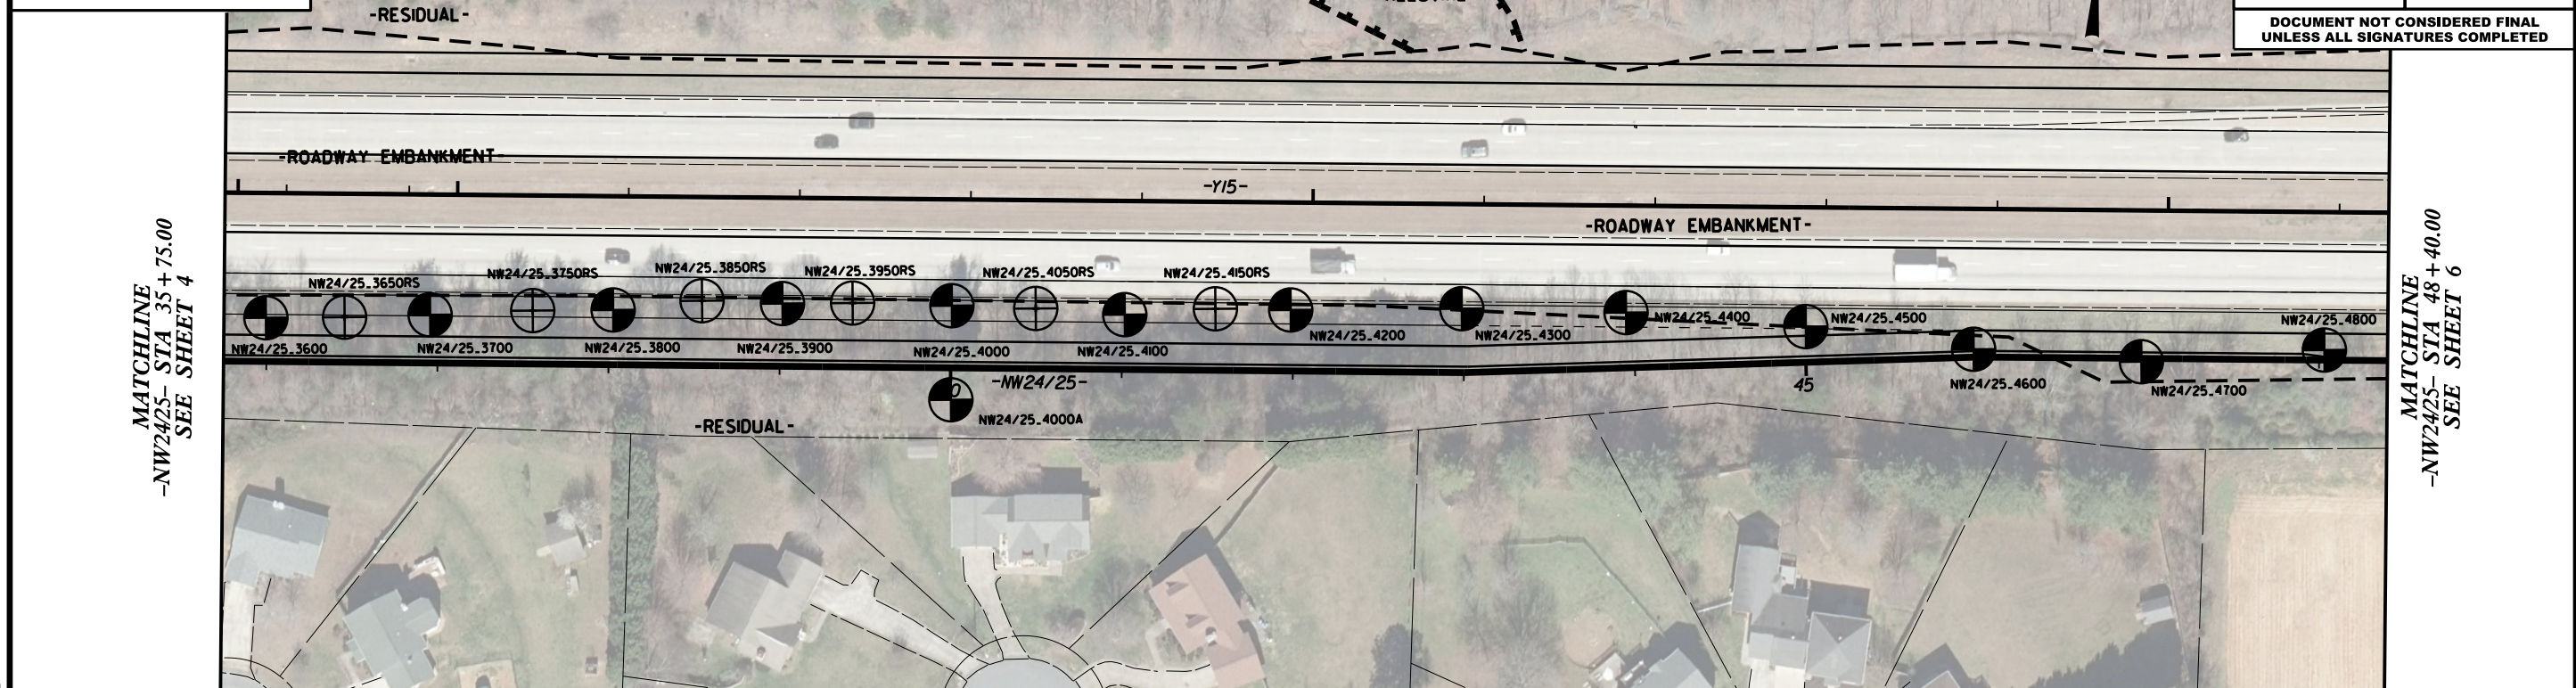



08-11-2021 15:30:00 -29499109-29433 U-2579AB SWAL (37946) CAD.DWG U2579AB_NW232425_psh03.dgn

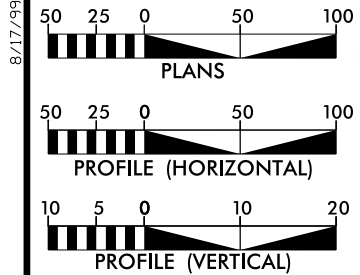

PLAN AND PROFILE OF NOISE WALL 24/25

PROJECT REFERENCE NO. U-2579AB	SHEET NO. 6
R/W SHEET NO.	HYDRAULICS ENGINEER
ROADWAY DESIGN ENGINEER	ENGINEER
INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

MATCHLINE
-NW2425- STA 48+40.00
SEE SHEET 5

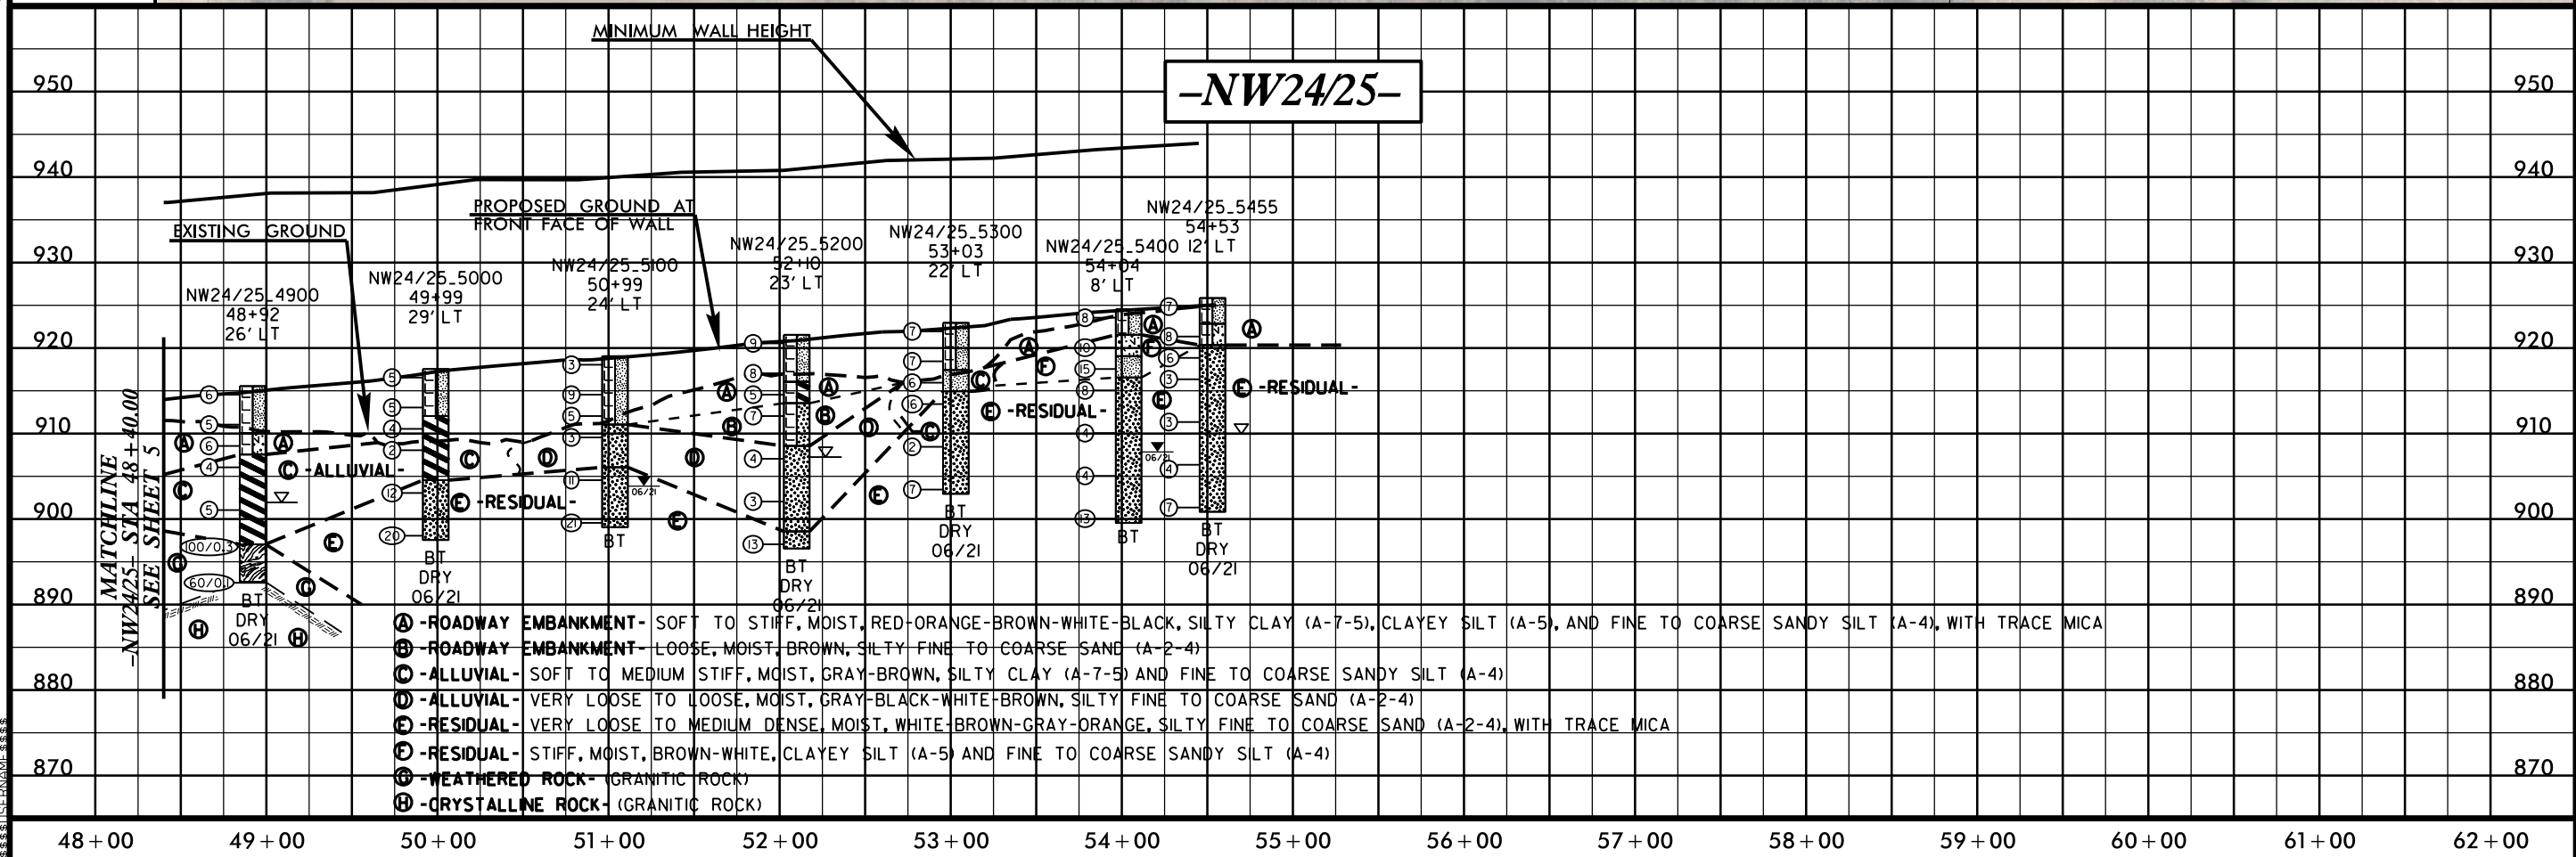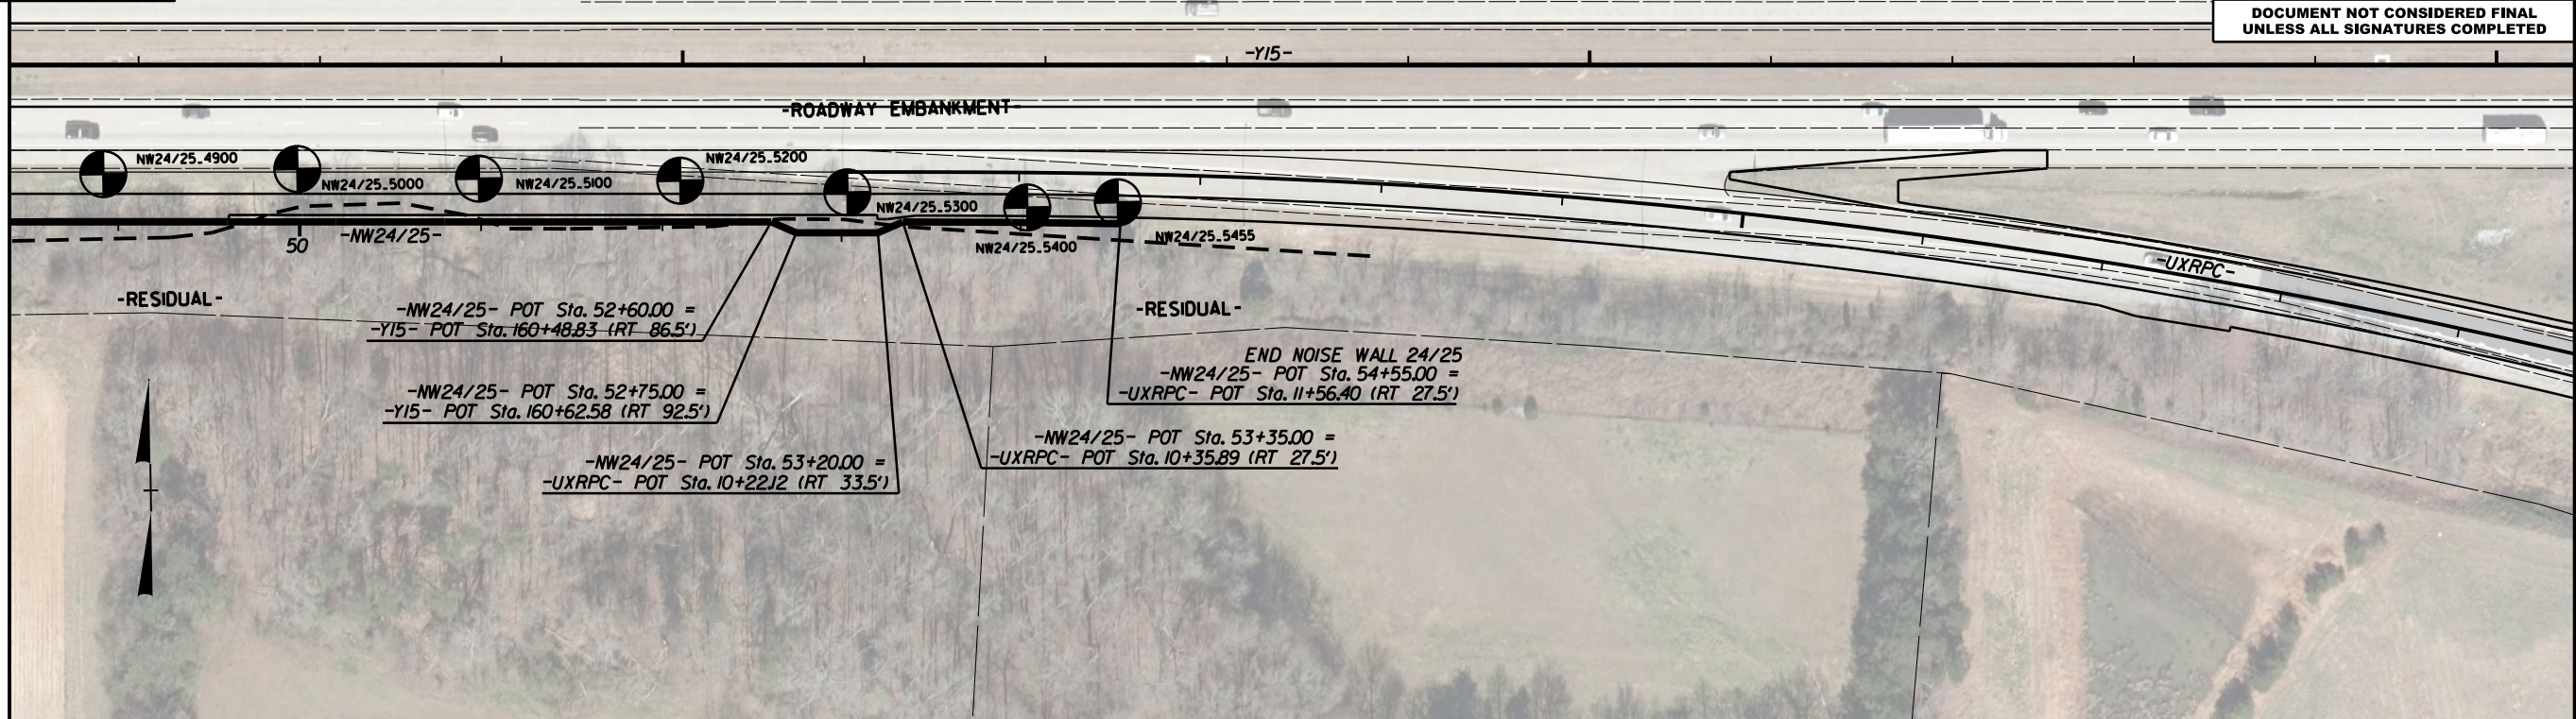

08-11-2024 15:20:00 U:\2579AB\SWAL (37946)\CADD\GEOTECH\Plan\Prof\U2579AB_NW232425_psh04.dgn

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST A. Suttle											
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)										
BORING NO. NW24/25_1950RS		STATION 19+54		OFFSET 3 ft LT		ALIGNMENT -NW24/25-											
COLLAR ELEV. 892.5 ft		TOTAL DEPTH 28.3 ft		NORTHING 847,882		EASTING 1,667,067											
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021		DRILL METHOD H.S. Augers		HAMMER TYPE Automatic													
DRILLER J. Chambless		START DATE 05/27/21		COMP. DATE 05/27/21		SURFACE WATER DEPTH N/A											
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100							
895																	
														892.5		GROUND SURFACE	0.0
																RESIDUAL	
																Red-Brown, Silty CLAY (A-7-5)	
890														889.5		Orange-Brown, Clayey SILT (A-5)	3.0
885														885.5		Gray, Silty Fine to Coarse SAND (A-2-4)	7.0
880														880.5		Gray-Orange, Fine to Coarse Sandy SILT (A-4), with trace mica	12.0
875																	
870																	
865	864.2	28.3												864.2		Boring Terminated with Standard Penetration Test Refusal at Elevation 864.2 ft On Crystalline Rock (GRANITIC ROCK)	28.3
																Surficial Organic Soils 0.0 to 0.3 feet	

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST A. Suttle											
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)										
BORING NO. NW24/25_2050RS		STATION 20+55		OFFSET 10 ft RT		ALIGNMENT -NW24/25-											
COLLAR ELEV. 900.0 ft		TOTAL DEPTH 3.7 ft		NORTHING 847,901		EASTING 1,667,167											
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021		DRILL METHOD H.S. Augers		HAMMER TYPE Automatic													
DRILLER J. Chambless		START DATE 05/27/21		COMP. DATE 05/27/21		SURFACE WATER DEPTH N/A											
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100							
900																	
														900.0		GROUND SURFACE	0.0
																RESIDUAL	
																Brown-Orange, Clayey SILT (A-5)	
	896.4	3.6												896.4		CRYSTALLINE ROCK	3.6
														896.3		Gray-White (GRANITIC ROCK)	3.7
																Boring Terminated with Standard Penetration Test Refusal at Elevation 896.3 ft In Crystalline Rock (GRANITIC ROCK)	
																Surficial Organic Soils 0.0 to 0.4 feet	

NCDOT BORE DOUBLE U2579AB_SWAL_GEO.GPJ NC_DOT.GDT 6/22/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34839.1.8	TIP U-2579AB	COUNTY FORSYTH	GEOLOGIST E. Susanto
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40			GROUND WTR (ft)
BORING NO. NW24/25_3450RS	STATION 34+47	OFFSET 29 ft LT	ALIGNMENT -NW24/25- 0 HR. 6.0
COLLAR ELEV. 887.7 ft	TOTAL DEPTH 25.4 ft	NORTHING 848,060	EASTING 1,668,541 24 HR. 6.3
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER J. Chambless	START DATE 06/04/21	COMP. DATE 06/04/21	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
890														
													887.7	GROUND SURFACE 0.0
885														RESIDUAL Brown-Orange-Tan, Fine to Coarse Sandy SILT (A-4), with trace to little mica
880														
875														
870														
865														
	862.4	25.3											862.4	25.3
													862.3	25.4
														CRYSTALLINE ROCK Gray-White (GRANITIC ROCK) Boring Terminated with Standard Penetration Test Refusal at Elevation 862.3 ft In Crystalline Rock (GRANITIC ROCK) Surficial Organic Soils 0.0 to 0.2 feet

WBS 34839.1.8	TIP U-2579AB	COUNTY FORSYTH	GEOLOGIST E. Susanto
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40			GROUND WTR (ft)
BORING NO. NW24/25_3550RS	STATION 35+49	OFFSET 25 ft LT	ALIGNMENT -NW24/25- 0 HR. 6.0
COLLAR ELEV. 889.4 ft	TOTAL DEPTH 17.2 ft	NORTHING 848,054	EASTING 1,668,642 24 HR. 6.4
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER J. Chambless	START DATE 06/04/21	COMP. DATE 06/04/21	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				
890														
													889.4	GROUND SURFACE 0.0
885														RESIDUAL Tan, Fine to Coarse Sandy SILT (A-4), with trace mica
880														
875														
	872.3	17.1											872.3	17.1
													872.2	17.2
														CRYSTALLINE ROCK White-Gray (GRANITIC ROCK) Boring Terminated with Standard Penetration Test Refusal at Elevation 872.2 ft In Crystalline Rock (GRANITIC ROCK) Surficial Organic Soils 0.0 to 0.2 feet

NCDOT BORE DOUBLE U2579AB_SWAL_GEO.GPJ NC_DOT.GDT 6/22/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST E. Susanto									
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)								
BORING NO. NW24/25_3650RS		STATION 36+46		OFFSET 26 ft LT		ALIGNMENT -NW24/25-									
COLLAR ELEV. 891.4 ft		TOTAL DEPTH 2.4 ft		NORTHING 848,054		EASTING 1,668,739									
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER J. Chambless		START DATE 06/04/21		COMP. DATE 06/04/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
895															
														891.4	0.0
														889.0	2.4
890	889.0	2.4												889.0	2.4

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST E. Susanto									
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)								
BORING NO. NW24/25_3750RS		STATION 37+55		OFFSET 31 ft LT		ALIGNMENT -NW24/25-									
COLLAR ELEV. 893.7 ft		TOTAL DEPTH 2.7 ft		NORTHING 848,057		EASTING 1,668,849									
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER J. Chambless		START DATE 06/03/21		COMP. DATE 06/03/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
895															
														893.7	0.0
														891.1	2.6
														891.0	2.7

NCDOT BORE DOUBLE U2579AB_SWAL_GEO.GPJ NC_DOT.GDT 6/22/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST E. Susanto									
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)								
BORING NO. NW24/25_3850RS		STATION 38+54		OFFSET 38 ft LT		ALIGNMENT -NW24/25-									
COLLAR ELEV. 896.3 ft		TOTAL DEPTH 12.0 ft		NORTHING 848,062		EASTING 1,668,948									
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021			DRILL METHOD H.S. Augers		HAMMER TYPE Automatic										
DRILLER J. Chambless		START DATE 06/03/21		COMP. DATE 06/03/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
900															
895														896.3	0.0
890														888.3	8.0
														884.4	11.9
885	884.4	11.9												884.3	12.0

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST E. Susanto									
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)								
BORING NO. NW24/25_3950RS		STATION 39+42		OFFSET 37 ft LT		ALIGNMENT -NW24/25-									
COLLAR ELEV. 897.9 ft		TOTAL DEPTH 7.9 ft		NORTHING 848,060		EASTING 1,669,036									
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021			DRILL METHOD H.S. Augers		HAMMER TYPE Automatic										
DRILLER J. Chambless		START DATE 06/03/21		COMP. DATE 06/03/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
900															
														897.9	0.0
895														894.9	3.0
890	890.1	7.8												890.1	7.8
														890.0	7.9

NCDOT BORE DOUBLE U2579AB_SWAL_GEO.GPJ NC_DOT.GDT 6/22/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST A. Suttle									
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)								
BORING NO. NW24/25_4000A		STATION 40+00		OFFSET 19 ft RT		ALIGNMENT -NW24/25-									
COLLAR ELEV. 912.3 ft		TOTAL DEPTH 35.0 ft		NORTHING 848,003		EASTING 1,669,093									
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic									
DRILLER J. Chambless		START DATE 06/08/21		COMP. DATE 06/08/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
915															
910	911.3	1.0	5	5	5								M	912.3 GROUND SURFACE 0.0	
	908.8	3.5	4	6	6								M	909.3 RESIDUAL Stiff, Brown, Fine to Coarse Sandy SILT (A-4) 3.0	
	906.3	6.0	3	5	6								M	906.8 Stiff, Brown-orange, Clayey SILT (A-5) 5.5	
905	903.8	8.5	2	4	5								M	906.8 Medium Stiff to Stiff, Brown-Orange, Fine to Coarse Sandy SILT (A-4), with trace to little mica 5.5	
900	898.8	13.5	3	3	4								M		
895	893.8	18.5	37	34	35								M	894.3 Very Dense, Gray-White-Brown, Silty Fine to Coarse SAND (A-2-4), with trace mica 18.0	
890	888.8	23.5	11	21	34								M		
885	883.8	28.5	100/0.4										M	883.8 WEATHERED ROCK White-Brown (GRANITIC ROCK) 28.5	
880	878.8	33.5	8	13	31								M	879.3 RESIDUAL 877.3 Dense, White-Black-Brown, Silty Fine to Coarse SAND (A-2-4) 35.0	
															Boring Terminated at Elevation 877.3 ft In Residual Silty SAND (A-2-4)
															Surficial Organic Soils 0.0 to 0.3 feet

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST E. Susanto									
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)								
BORING NO. NW24/25_4050RS		STATION 40+49		OFFSET 35 ft LT		ALIGNMENT -NW24/25-									
COLLAR ELEV. 899.5 ft		TOTAL DEPTH 21.6 ft		NORTHING 848,056		EASTING 1,669,143									
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic									
DRILLER J. Chambless		START DATE 06/03/21		COMP. DATE 06/03/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
900															
															899.5 GROUND SURFACE 0.0
895															895.5 RESIDUAL Brown, Fine to Coarse Sandy SILT (A-4), with little mica 4.0
															891.5 Brown, Silty Fine to Coarse SAND (A-2-4) 8.0
890															891.5 Brown-Gray-Tan, Fine to Coarse Sandy SILT (A-4), with trace mica 8.0
885															
880	877.9	21.6	60/0.0												877.9 Boring Terminated with Standard Penetration Test Refusal at Elevation 877.9 ft On Crystalline Rock (GRANITIC ROCK) 21.6
															Surficial Organic Soils 0.0 to 0.2 feet

NCDOT BORE DOUBLE U2579AB_SWAL_GEO.GPJ NC_DOT.GDT 6/22/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 34839.1.8		TIP U-2579AB		COUNTY FORSYTH		GEOLOGIST E. Susanto										
SITE DESCRIPTION Winston-Salem Beltway from US 421/I-40 Business to I-40							GROUND WTR (ft)									
BORING NO. NW24/25_4150RS		STATION 41+54		OFFSET 36 ft LT		ALIGNMENT -NW24/25-										
COLLAR ELEV. 901.6 ft		TOTAL DEPTH 16.4 ft		NORTHING 848,055		EASTING 1,669,248										
DRILL RIG/HAMMER EFF./DATE TDD1893 CME-550X 79% 06/15/2021				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic										
DRILLER J. Chambless		START DATE 06/03/21		COMP. DATE 06/03/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)		
905																
900														901.6	GROUND SURFACE	0.0
895															RESIDUAL Medium Stiff Tan-Brown-Black-White, Fine to Coarse Sandy SILT (A-4), with trace to little mica	
890	893.1	8.5	2	3	4											
	888.1	13.5	19	73	27/0.1											
	885.3	16.3	60/0.1											887.6	WEATHERED ROCK Gray-White (GRANITIC ROCK)	14.0
														885.3	CRYSTALLINE ROCK Gray-Brown (GRANITIC ROCK)	16.3
														885.2	Boring Terminated with Standard Penetration Test Refusal at Elevation 885.2 ft In Crystalline Rock (GRANITIC ROCK)	16.4
															Surficial Organic Soils 0.0 to 0.2 feet	

NCDOT BORE DOUBLE U2579AB_SWAL_GEO.GPJ NC_DOT.GDT 6/22/21