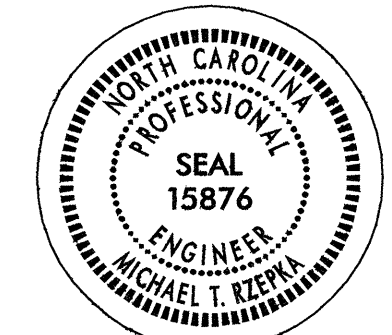



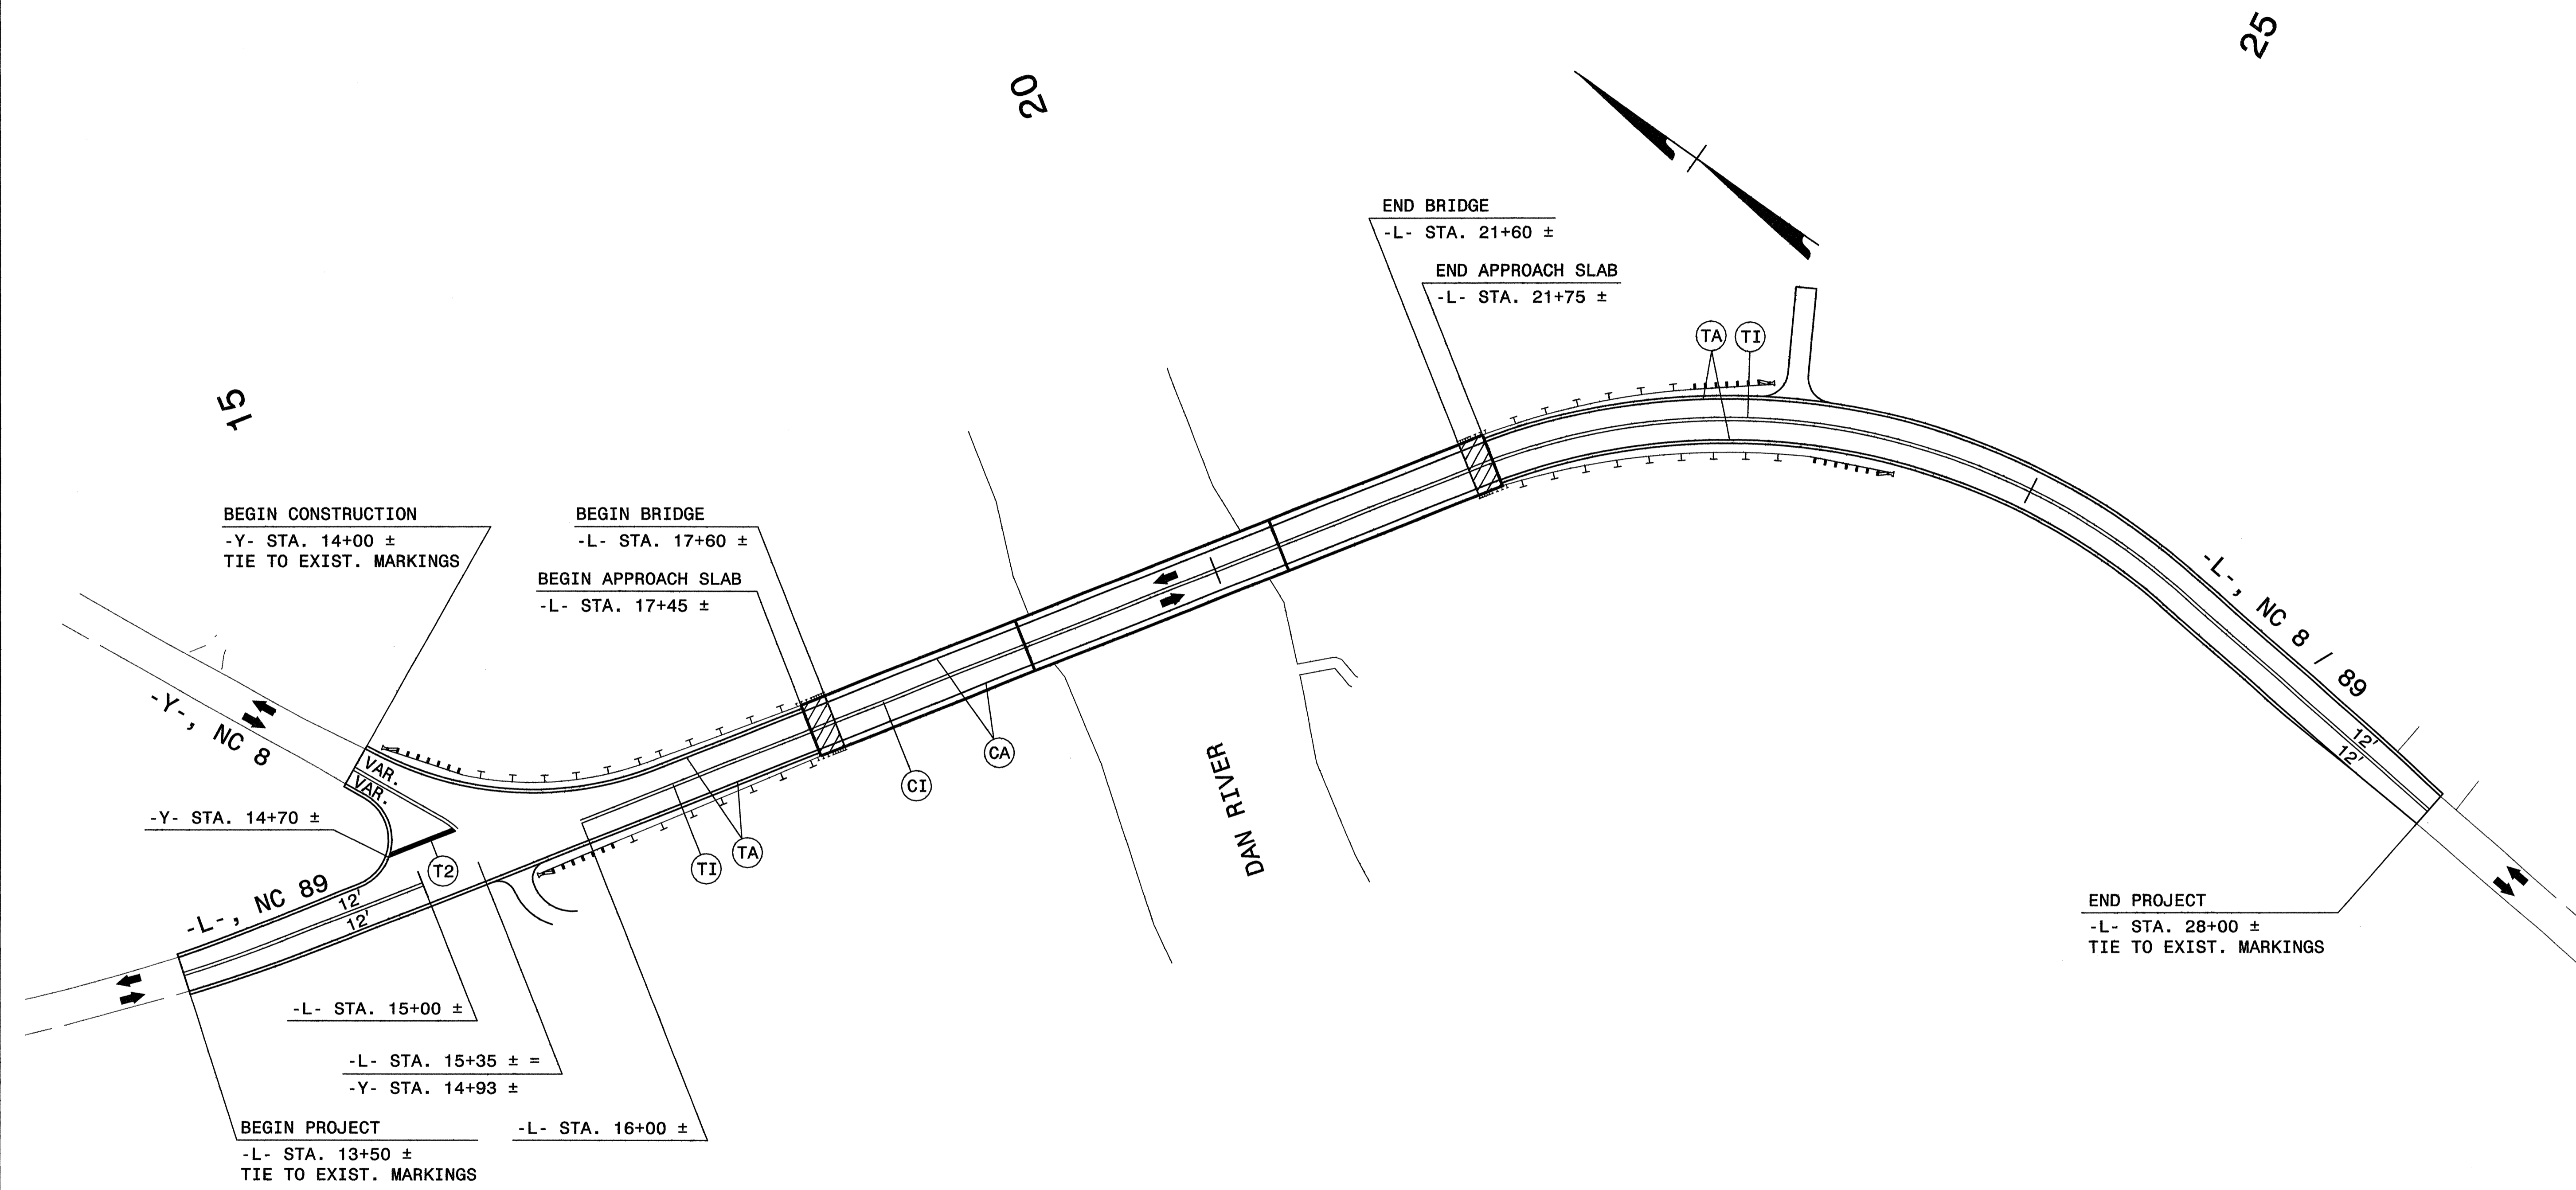
## FINAL PAV'T. MARKING SCHEDULE

<u>SYMBOL</u>	<u>DESCRIPTION</u>	<u>QUANTITY BREAKDOWN</u>	<u>PAY ITEM</u>	<u>TOTAL QUANTITY</u>
PAVEMENT MARKING LINES				
TA	WHITE EDGELINE	2,180 LF	THERMOPLASTIC (4", 90 mils)	
			TOTAL	2,180 LF
TI	YELLOW DOUBLE CENTER LINE	1,980 LF	THERMOPLASTIC (4", 120 mils)	
			TOTAL	1,980 LF
T2	WHITE STOP BAR	42 LF	THERMOPLASTIC (24", 120 mils)	
			TOTAL	42 LF
CA	WHITE EDGELINE	860 LF	COLD APPLIED PLASTIC TYPE III (4")	
CI	YELLOW DOUBLE CENTER LINE	860 LF		
			TOTAL	1,720 LF
PAVEMENT MARKERS				
MA	YELLOW & YELLOW	5 EA	PERMANENT RAISED	
			TOTAL	5 EA
ME	YELLOW & YELLOW	13 EA	SNOWPLOWABLE	
			TOTAL	13 EA


SEE ROADWAY STANDARD DRAWING NUMBERS 1205.01, 1205.02, 1205.12, 1250.01, 1251.01 AND 1253.01

5/16/2008  
 R:\TrafficControl\TCP\007\B4281.TC.pmpl.dgn  
 KO & Associates, P.C.

APPROVED: <i>Michael T. Rzepka</i> DATE: 5-19-08		<b>FINAL PAVEMENT MARKING SCHEDULE</b>	
SEAL 	SCALE: NONE		REVISIONS
	DATE: 5-08		
	DWG. BY: BLM		
	DESIGN BY: BLM		
REVIEWED BY: MTR			



5/16/2008  
 R:\TrafficControl\TCP\007\B4281.TC\_bmp2.dgn  
 KO & Associates, P.C.

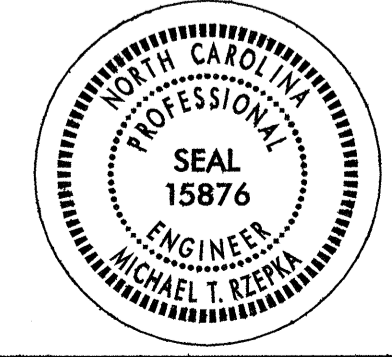APPROVED: <i>Michael T. Rzepka</i> DATE: 5-19-08		<b>FINAL PAVEMENT MARKING PLAN</b>	
SEAL 	SCALE: NONE		
	DATE: 5-08		
	DWG. BY: BLM		
DESIGN BY: BLM			
REVIEWED BY: MTR			