


MATCHLINE SHEET 4 -L- STA. 21+00.00



NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

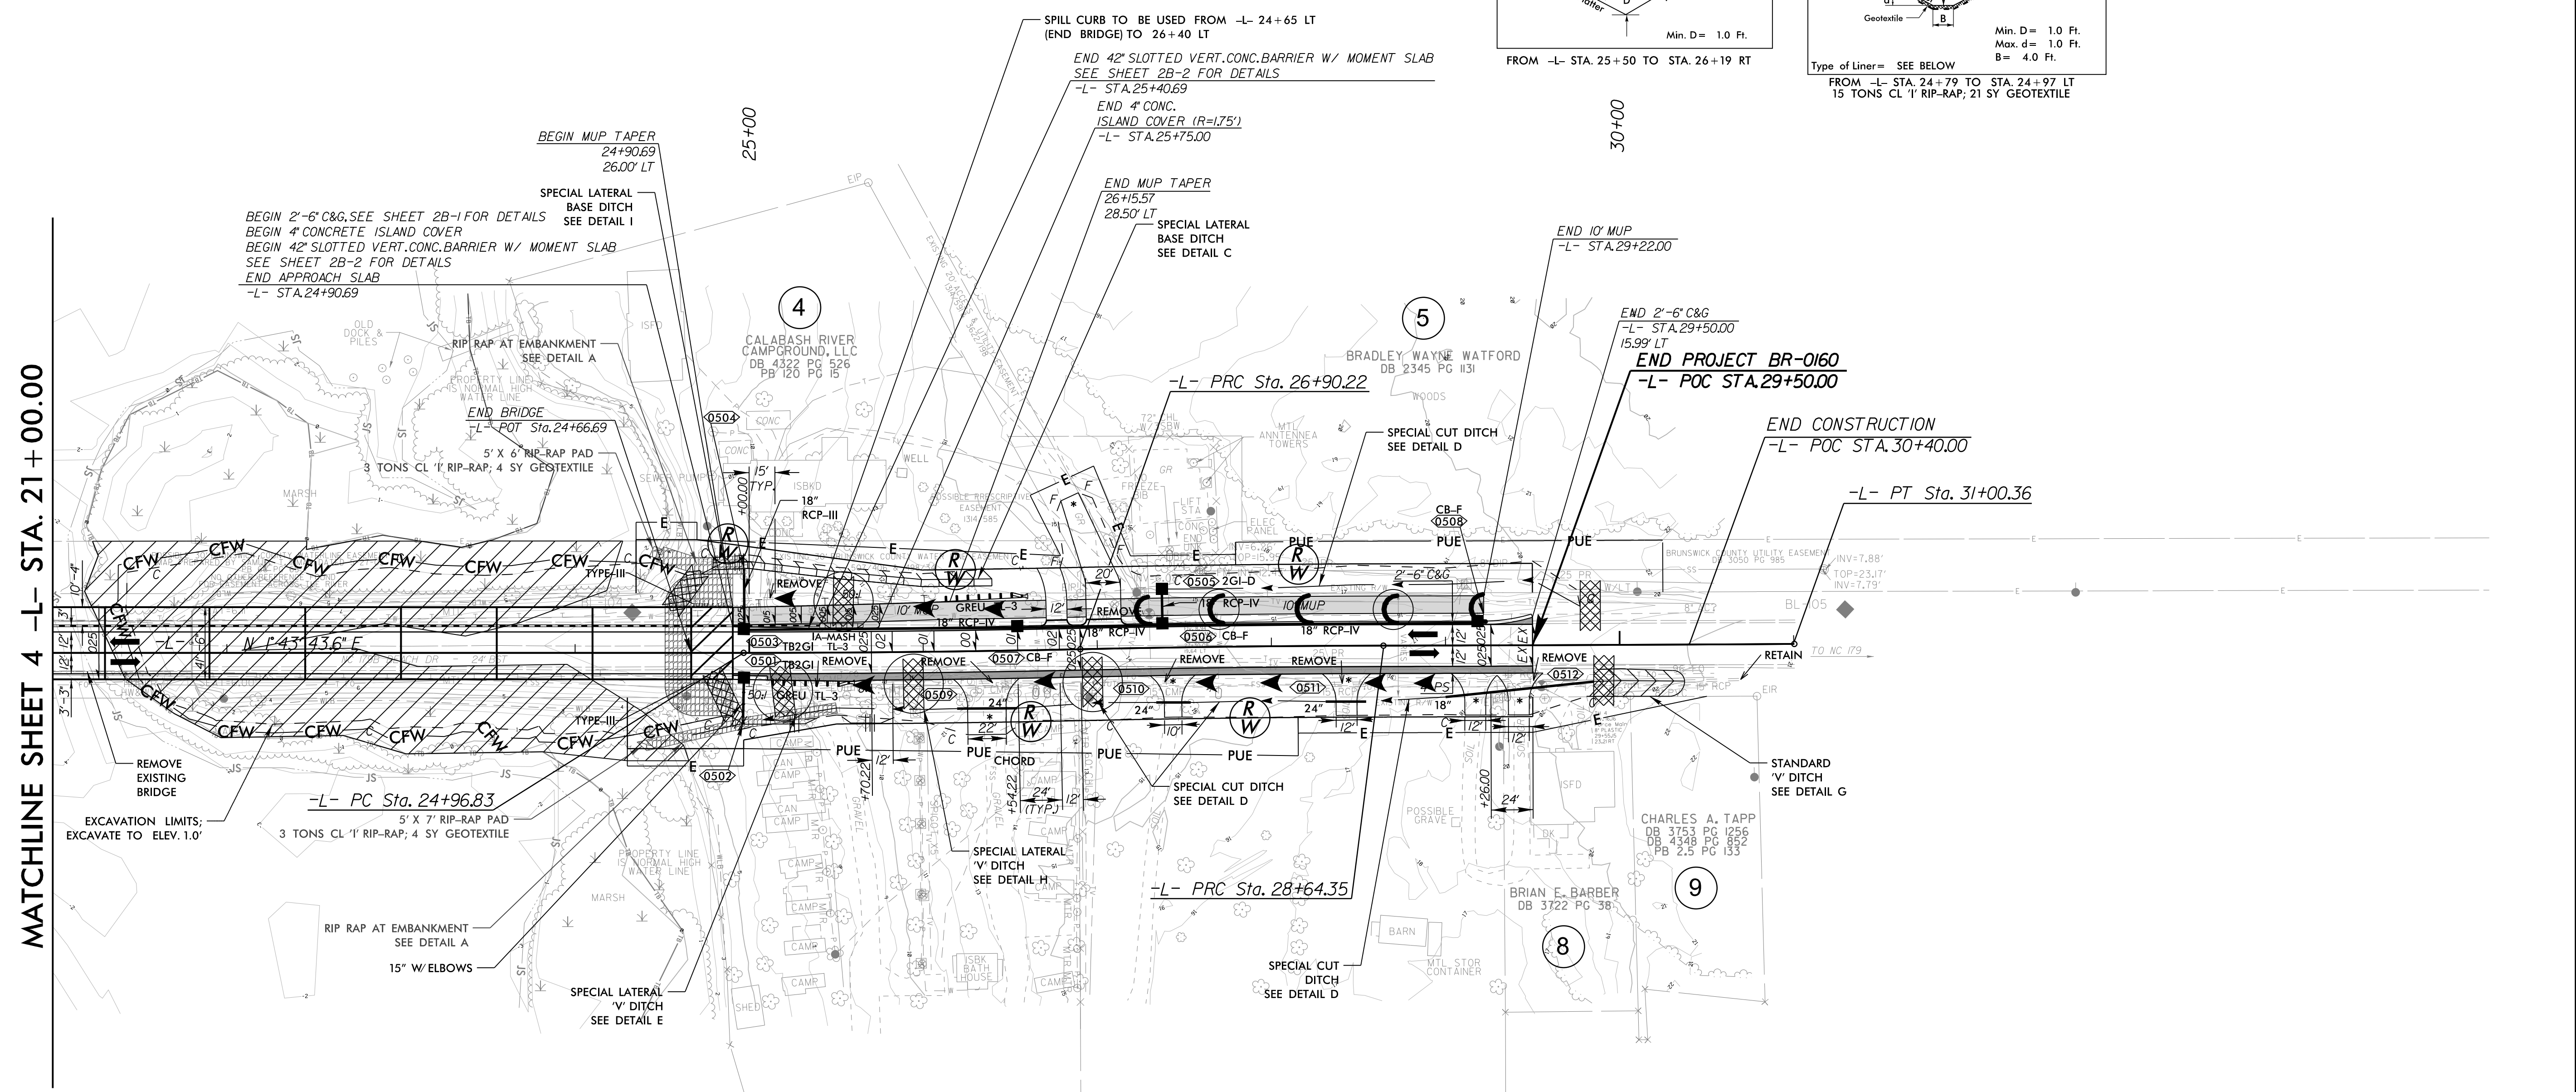

NOTE: UTILIZE FLOATING TURBIDITY CURTAIN WHERE APPLICABLE.

NOTE: UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

NOTE: CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 5

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

-L- CURVE DATA

PI Sta. 25+93.53 Δ = 1°13' 52.3" (LT) D = 0° 38' 11.8" L = 193.40' T = 96.70' R = 9,000.00' SE = NC RO = 84°	PI Sta. 27+77.29 Δ = 1°06' 30.7" (RT) D = 0° 38' 11.8" L = 174.13' T = 87.07' R = 9,000.00' SE = NC	PI Sta. 29+82.35 Δ = 0°13' 46.8" (LT) D = 0° 05' 50.3" L = 236.01' T = 118.01' R = 58,879.33' SE = NC AH = N 1°22' 35.1" E
---	---	---

22-FEB-2023 13:24 R:\E-Plan_Sheets\BR0160\EC-5.dgn