
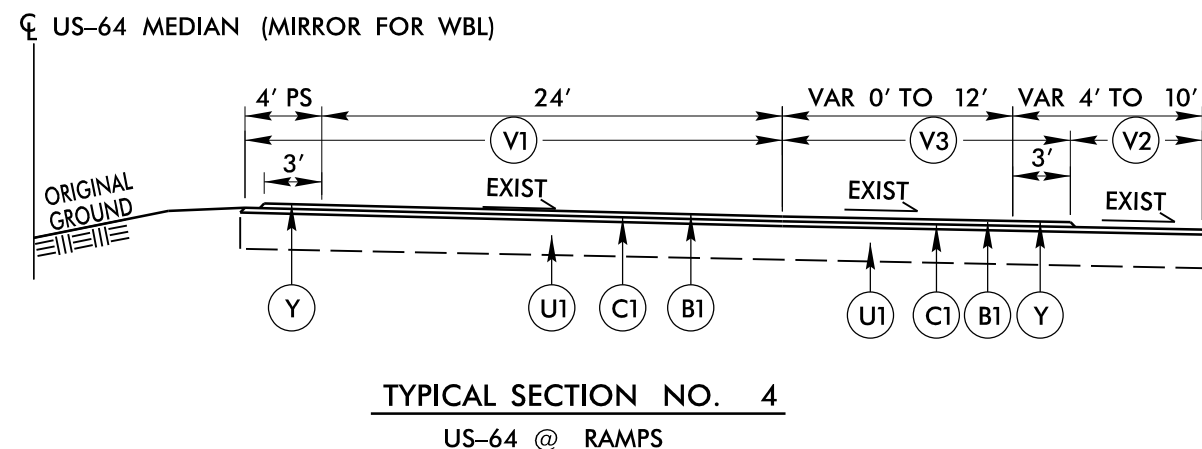
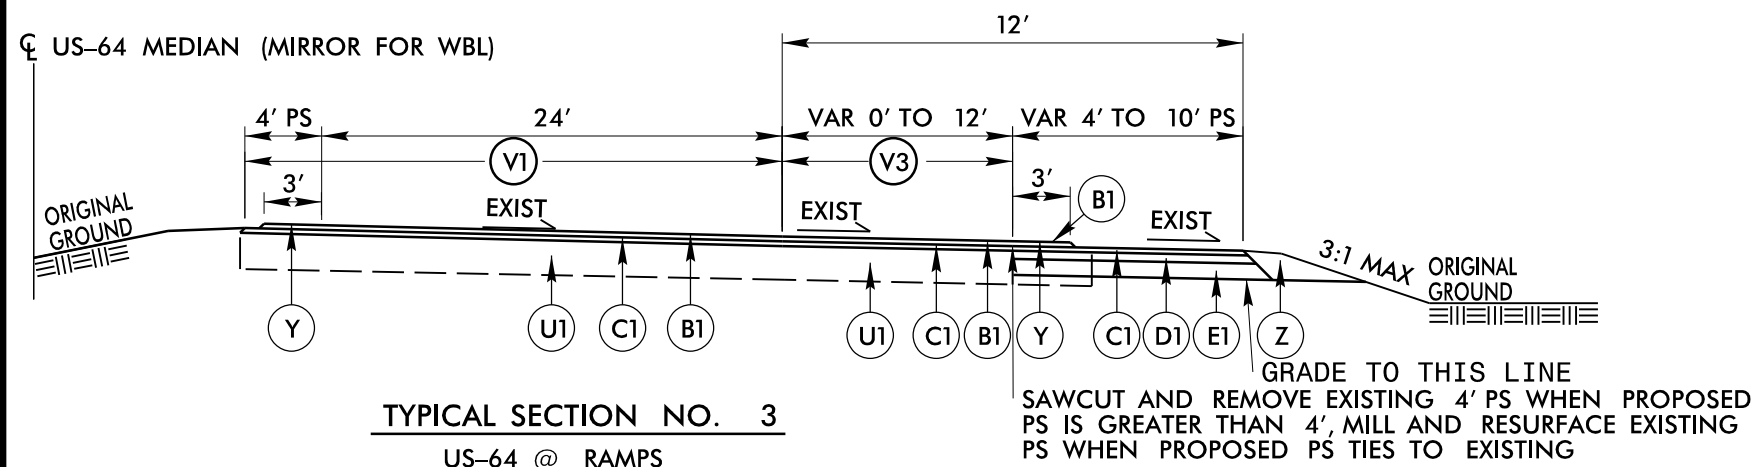
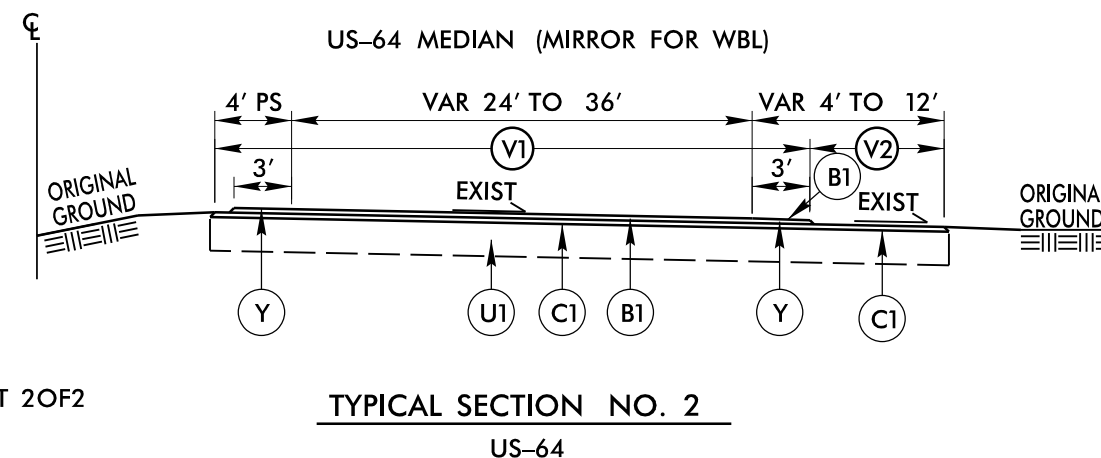


PAVEMENT SCHEDULE

PROJECT REFERENCE NO.	SHEET NO.
I-604I 47990.3J	4

B1	PROP. OPEN-GRADED ASPHALT FRICTION COURSE, TYPE FC-1 MOD, AT AN AVERAGE RATE OF 90 LBS. PER SQ. YARD.	U1	EXISTING PAVEMENT.	Y	MILLED RUMBLE STRIPS (ASPHALT CONCRETE)
C1	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YARD.	V1	MILLING ASPHALT PAVEMENT. 2.75" DEPTH.	Z	SHOULDER RECONSTRUCTION WITH AGGREGATE SHOULDER BORROW.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YARD.	V2	MILLING ASPHALT PAVEMENT. 2" DEPTH.	NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.	
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YARD.	V3	INCIDENTAL MILLING		

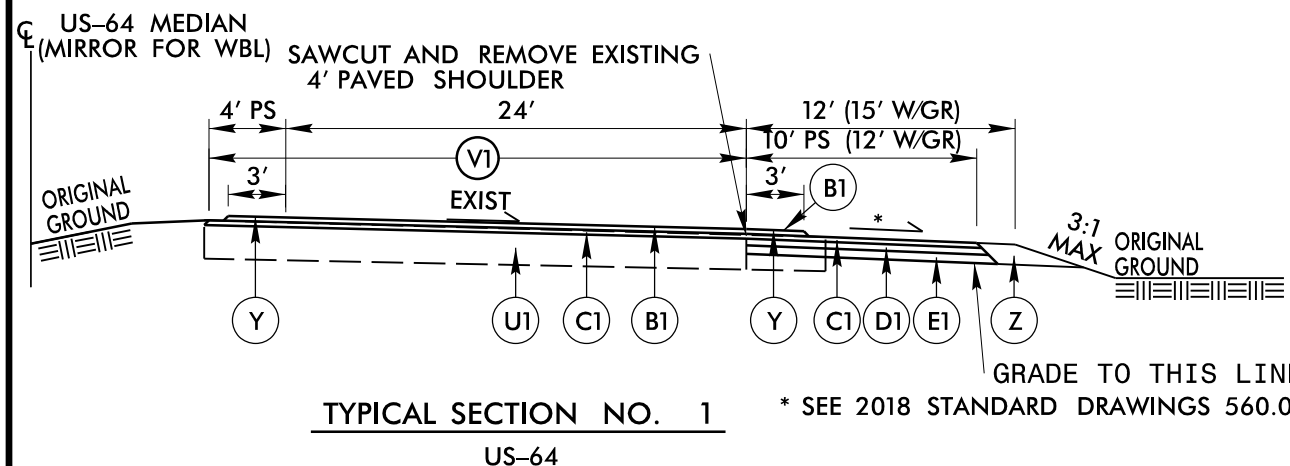

6/2/99
 05-APR-2023 11:38
 C:\Users\ydr\OneDrive\Desktop\I-604-I-6041-I-6041-I-6041.dwg4_TYP.dgn