



**\*DESIGN NOTE:**  
DURING CONSTRUCTION OF THE CHANNEL CHANGE, REMOVE GEOTEXTILE FABRIC AS NECESSARY TO EMBED THE RIP RAP IN THE STREAM BED.

**NOTE: USE IMPERVIOUS DIKES AND PUMP AROUND AS NECESSARY TO CONSTRUCT THE PROPOSED BASE DITCH IN THE "DRY". WORK MUST BE STABILIZED PRIOR TO THE STREAM BEING RELOCATED.**

BEGIN TIP PROJECT R-5799  
-L- STA.7+00.00

MATCH LINE -L- STA 16+50 SHEET 5

 ENVIRONMENTALLY SENSITIVE AREA  
SEE PROJECT SPECIAL PROVISIONS

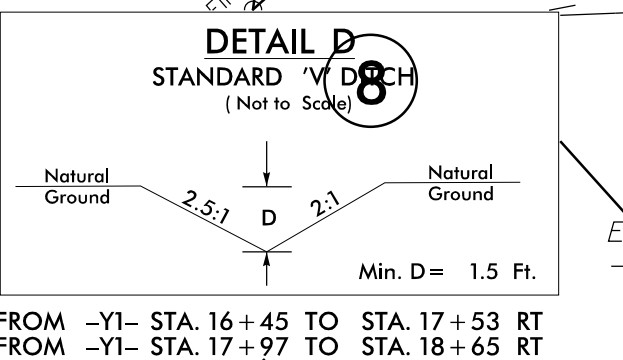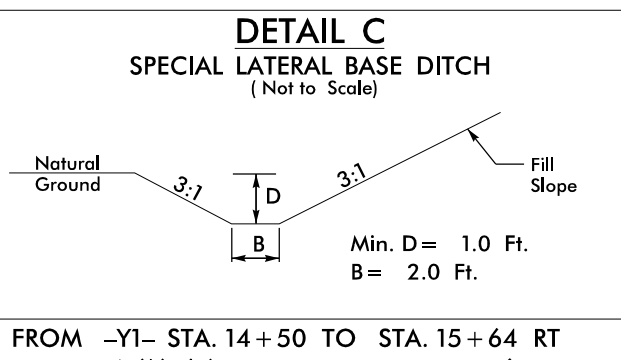

CLEARING AND GRUBBING  
EROSION CONTROL FOR  
CONSTRUCTION SHEET 4

**NOTE:**  
EXCELSIOR OR OTHER MESH TYPE NETTING IS NOT ALLOWED IN OR ON STREAM BANKS.

**NOTE:**  
UTILIZE FABRIC INSERT INLET PROTECTION DEVICES IN LIEU OF ROCK INLET SEDIMENT TRAPS, TYPE-C AS DIRECTED TO AVOID IMPOUNDMENT OF RUNOFF IN ROADWAY OPEN TO TRAFFIC.

**NOTE:**  
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

**NOTES:** ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

R-5799-2023.10.06 EC-5/CONST.4.dgn