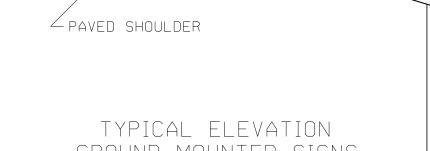

Version: 3.1

Version: 3.1		Posted	: 6/2/2017	1	-		T	1				1	1			1			1												1
	SIGN			NUMBER			SUPPORT				HORIZONTAL			LENGTH	<u>(ft)</u>										SUPPORT	WEIGHTS		FOC			FIELD VERIFIED
		SIZI	E (in.)	ROADWAY	OF	BEAM	TYPE	OMNI	ATTACHMENT		CLEARANCE*		SNS HT	MTG HT	EMBED-	LEF	T SUPPOI	RT (ft)	CENT	ER SUPPO	RT (ft)	RIGH	IT SUPPO	RT (ft)	B/A	SIMPLE	DIAMETER	DEPTH	REINFORCED	PLAIN	SEE NOTE 2
NUMBER	TYPE	w	x h	STATION	SUPPORTS	SECTION	BA or S	COUPLER	METHOD	METHOD	(ft.)	SPACING	"H"	"C"	MENT	S	L	LENGTH	S	L	LENGTH	S	L	LENGTH	(lbs.)	(lbs.)	(ft.)	(ft.)	(c.y.)	(c.y.)	(mm/dd/yy)
101	А	114	x 102	1235	2	W6x12	BA	N/A	N/A	N/A	12.00	5.57	8.50	7.61	3.5	-0.61	15.50	19.00	0.00	0.00	0.00	2.16	18.27	21.77	567.24	0	1.5	4	0.52	0.00	
102	А	126	x 162	1352	2	W6x16	ВА	N/A	N/A	N/A	13.00	6.15	13.50	7.02	4.5	-0.02	20.50	25.00	0.00	0.00	0.00	3.05	23.57	28.07	943.12	0	1.5	5	0.65	0.00	
103	А	108	x 150	1180	2	W6x12	ВА	N/A	N/A	N/A	12.00	5.27	12.50	7.79	3.5	-0.79	19.50	23.00	0.00	0.00	0.00	-0.68	19.61	23.11	631.30	0	1.5	4	0.52	0.00	
																									TOTAL 2141.66	TOTAL)		TOTAL 1.70	TOTAL 0.00	



- 1. DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF TRAVEL LANE.
- 2.FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (*) ARTICLE 1072-1. (*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
- 3. PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

GROUND MOUNTED SIGNS



- EDGE OF TRAVEL LANE

TIP NO.	SHEET NO.						
C–5621	SIGN-1A						
APPROVED:							
SEAL							
SEAL 030952							
DOCUMENT NOT CONSIL UNLESS ALL SIGNATURE							

2.00 0.00

USE: 2142.00 0.00



TYPE "A" GROUND MOUNTED SIGN SUPPORT INFORMATION

