DocuSign Envelope ID: 42B5F23A-DEFA-46D0-A184-88ADDE553CD8

TIP NO.	SHEET NO.
R-3833C	SIGN-3B

APPROVED: Betsy L. Watson (DocuSigned by: 35E67BB34F8743F...)

DATE: 4/28/2023

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 29449 ENGINEER BETSY L. WATSON

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Stantec

SIGN NUMBER: 8
TYPE: A
QUANTITY: 1

SIGN WIDTH: 72″
HEIGHT: 90″
TOTAL AREA: 45.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 64.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	24	33	24	24
ARDOWN	24	7.6	24	16.5

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-3833C
CHECKED BY: BLW
DIV: 12
DATE: Feb 25, 2022



Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade A sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

								Series/Size Text Length
	S		O	U	T	H		E 2000
11.3	9.7	1.8	10.7	9.8	9.2	8.1	11.3	49.4

SIGN NUMBER: 9,12
TYPE: A
QUANTITY: 2

SIGN WIDTH: 90″
HEIGHT: 96″
TOTAL AREA: 60.0 Sq.Ft.

BORDER TYPE: RECESSED
RADII: 12″
WIDTH: 1.5″
RECESS: 0.5″

NO. Z BARS: 3
LENGTH: 82.0

BACKG COLOR: Yellow
COPY COLOR: Black

SYMBOL	X	Y	WID	HT
ARDOWN	33	7.1	24	16.5

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-3833C
CHECKED BY: BLW
DIV: 12
DATE: Feb 25, 2022



Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border shall be direct applied black non-reflective sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																								Series/Size Text Length
	L	A	N	E																				E 2000
22	10	14.3	12.8	9	22																			46.1
	E	N	D	S																				E 2000
22.1	11.4	12.8	11.8	9.7	22.1																			45.7
	7	0	0		F	T																		E 2000
12.2	12.1	12.5	10.1	12	10	9	12.2																	65.6

SIGN NUMBER: 10
TYPE: A
QUANTITY: 1

SIGN WIDTH: 270″
HEIGHT: 138″
TOTAL AREA: 258.8 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 262.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_1	201.9	100.7	24	24
M1_4	13.6	60.4	24	24
u-turn arrow	42.6	12	27.5	30
u-turn arrow	186.6	12	27.5	30

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-3833C
CHECKED BY: BLW
DIV: 12
DATE: Apr 18, 2022

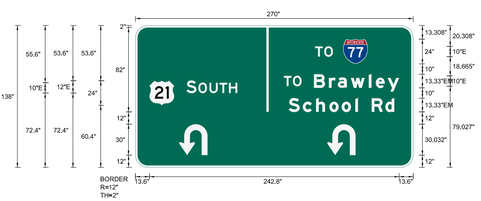

Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade A sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																								Series/Size Text Length
	T	O																						E 2000
174.6	8.9	8.4	78.1																					17.3
	T	O		B	r	a	w	l	e	y														E 2000,EM 2000
144.2	8.9	8.4	12	14.5	8.7	12.7	17.5	6.8	11.5	11.3	13.6													112.2
	S		O	U	T	H																		E 2000
49.6	9.7	1.8	10.7	9.8	9.2	8.1	171																	49.4
	S	c	h	o	o	l		R	d															EM 2000
148.9	13.7	12.9	12.9	12	13.2	2.7	13.3	13.2	8.8	18.3														102.8

ARROW DETAILS



ARROW DIMENSIONS (INCHES)	C	D	E	F	G	H	I
	5.6875	18.6875	11.3125	6.5	0.875	1.125	11.3

SIGN NUMBER: 11
TYPE: A
QUANTITY: 1

SIGN WIDTH: 72″
HEIGHT: 90″
TOTAL AREA: 45.0 Sq.Ft.

BORDER TYPE: FLUSH
RADII: 12″
WIDTH: 2″
RECESS: 0″

NO. Z BARS: 3
LENGTH: 64.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	24	33	24	24
ARDOWN	24	7.6	24	16.5

MAT'L: 0.125″ (3.2MM) ALUMINUM

DESIGN BY: RRH
PROJECT ID: R-3833C
CHECKED BY: BLW
DIV: 12
DATE: Feb 25, 2022



Spacing Factor is 1 unless specified otherwise

USE NOTES

1. Legend and border (except those that are colored black) shall be direct applied Grade A sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032″ (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

																								Series/Size Text Length
	N		O	R	T	H																		E 2000
11.3	9.7	2.6	10.7	9.2	9.2	8.1	11.3																	49.5

$$$$SYSTIME$$$$
$$$$DGN$$$$
$$$$USERNAME$$$$

SIGN DESIGNS