


8/17/99


PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
*E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
V1	MILLING OF EXISTING ASPHALT PAVEMENT AT DEPTH OF 1½"
V2	MILLING OF EXISTING ASPHALT PAVEMENT AT DEPTH OF 5.5"
T	SHOULDER RECONSTRUCTION
U	EXISTING PAVEMENT

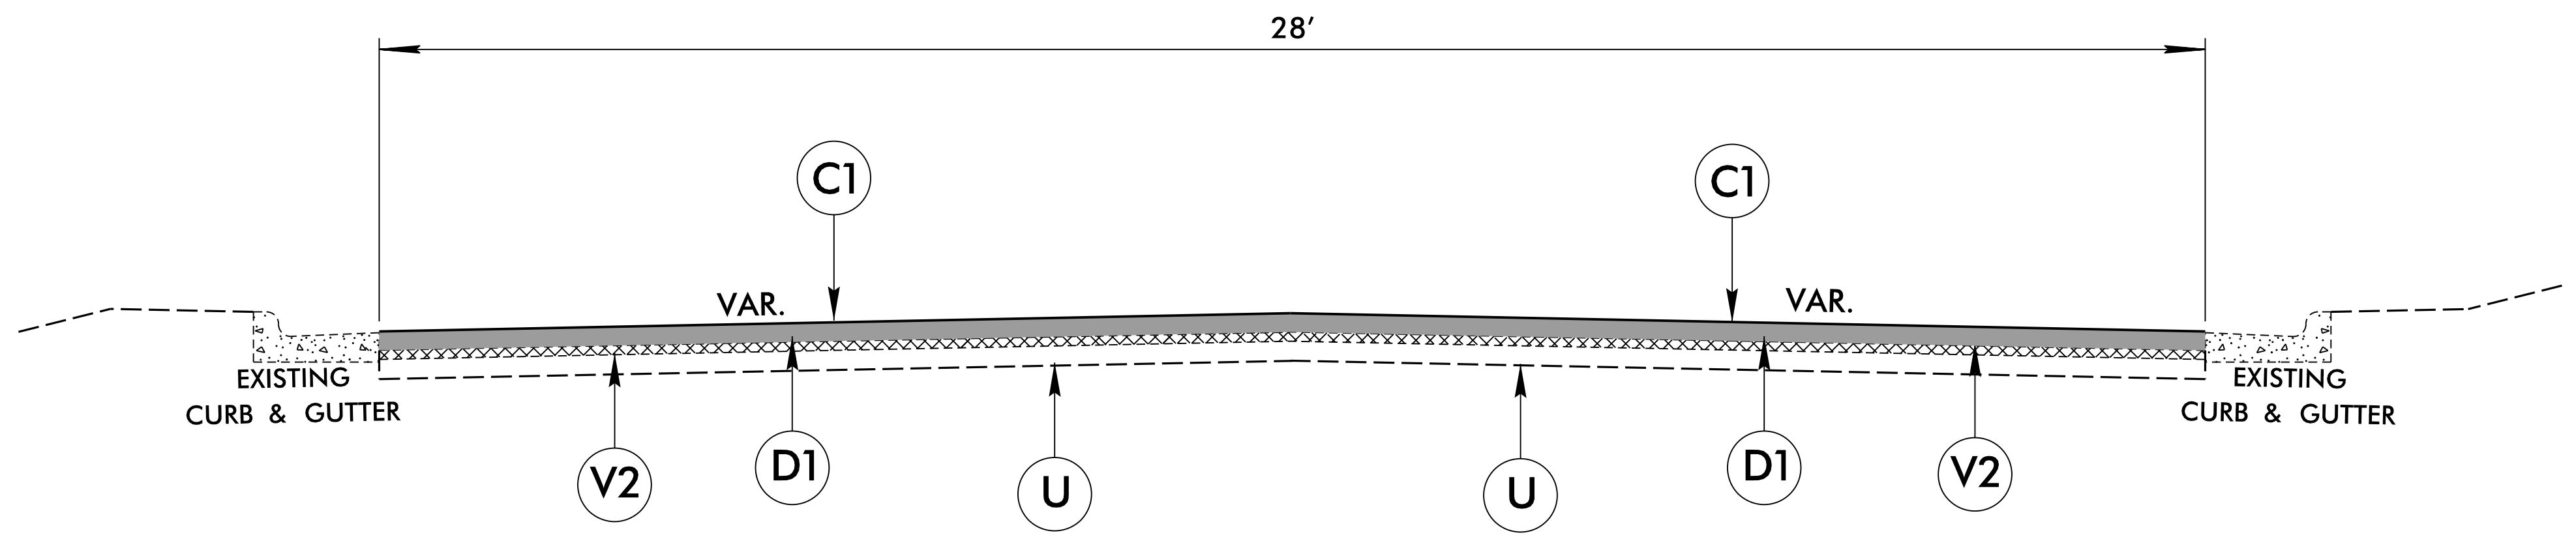


TYPICAL SECTION NO. 2

TYPICAL SECTION NO. 2
MAP 4 – HILLINDALE RD. CONTIGENCY ITEMS ONLY
DAMAGE DUE TO SUBGRADE FAILURE

8" SHALLOW UNDERCUT
8" CLASS IV SUBGRADE STABILIZATION
GEOTEXTILE FOR SUBGRADE STABILIZATION
*** 4" ASPHALT CONC BASE COURSE, TYPE B25.0C**
2'-6" CONCRETE CURB & GUTTER
4" CONCRETE SIDEWALK

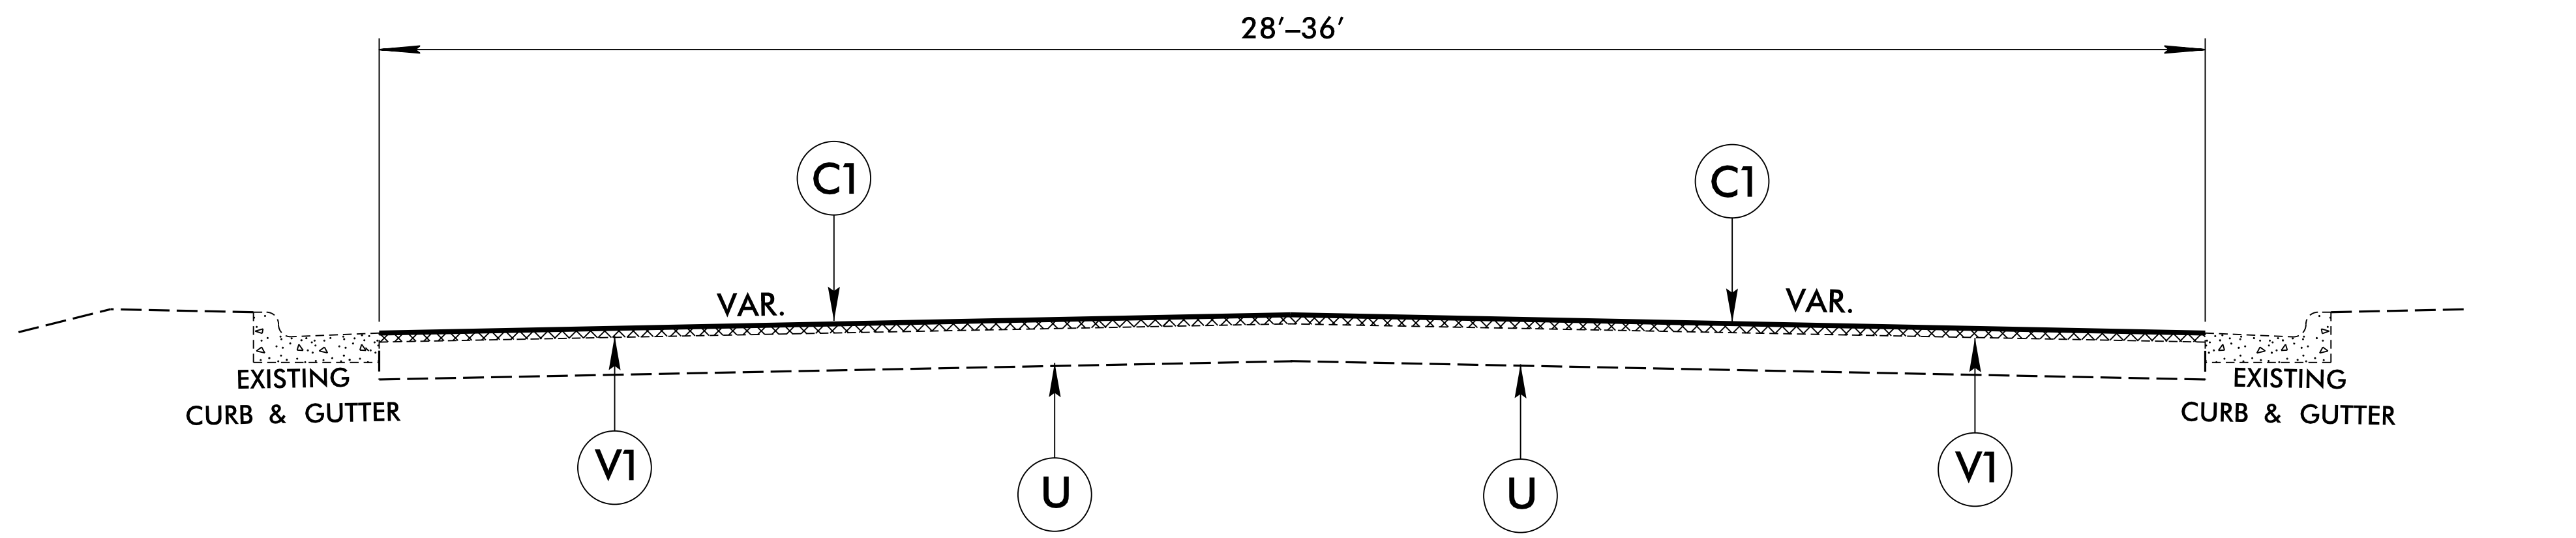

TYPICAL SECTION NO. 3

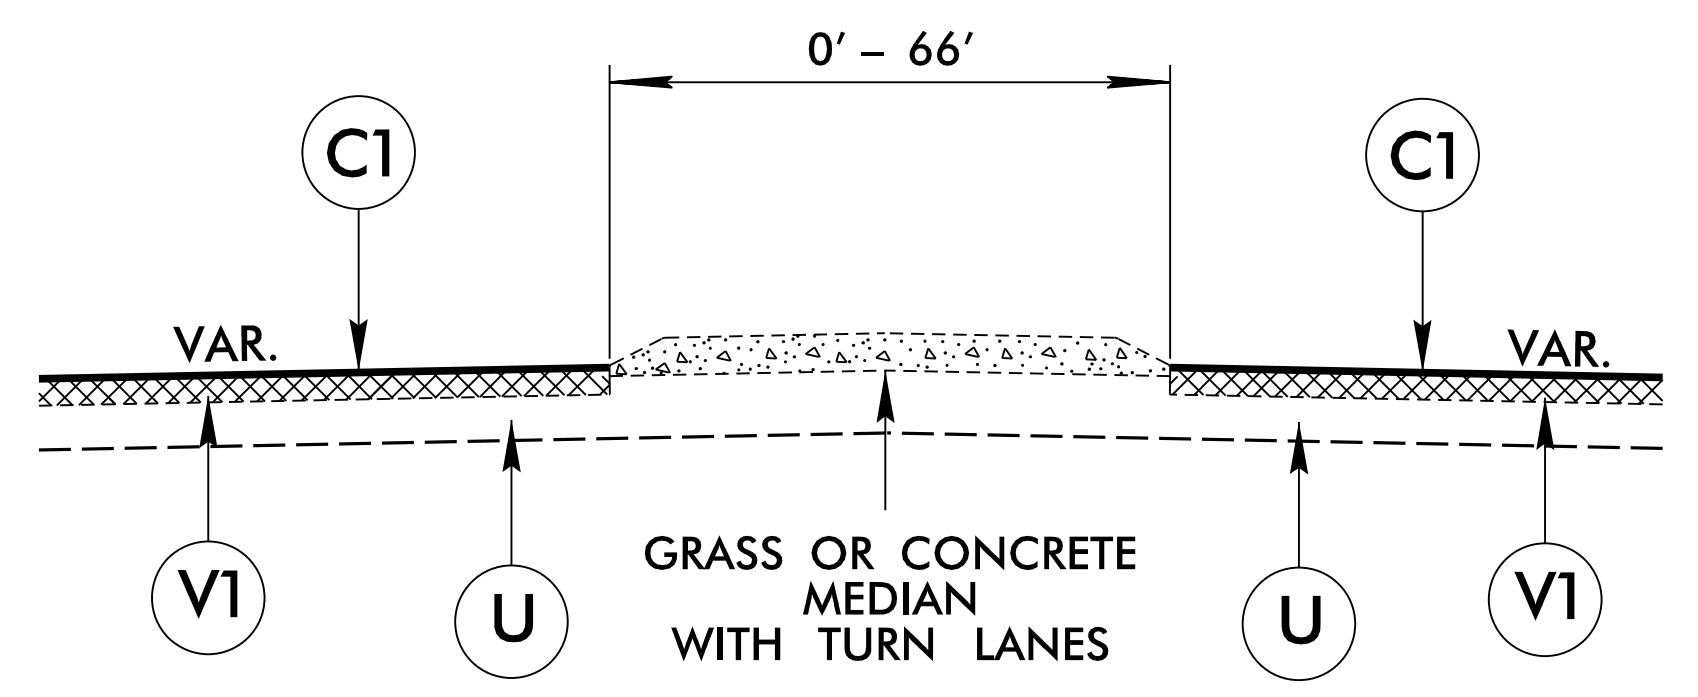

USE IN CONJUNCTION WITH TYPICAL SECTION NO. 3

MAP 5 HILLINDALE RD.
 MEDIAN SECTION – 460' +/-