

## QUANTITIES

GEOTEXTILE FOR SOIL STABILIZATION SELECT GRANULAR MATERIAL

13,300 SY<del>\*</del> 13,300 CY<del>\*</del>

\* GEOTEXTILE FOR SOIL STABILIZATION ESTIMATED QUANTITY DOES NOT INCLUDE OVERLAPS OR WASTE

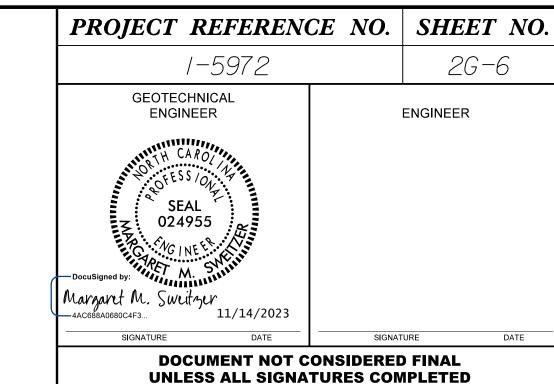

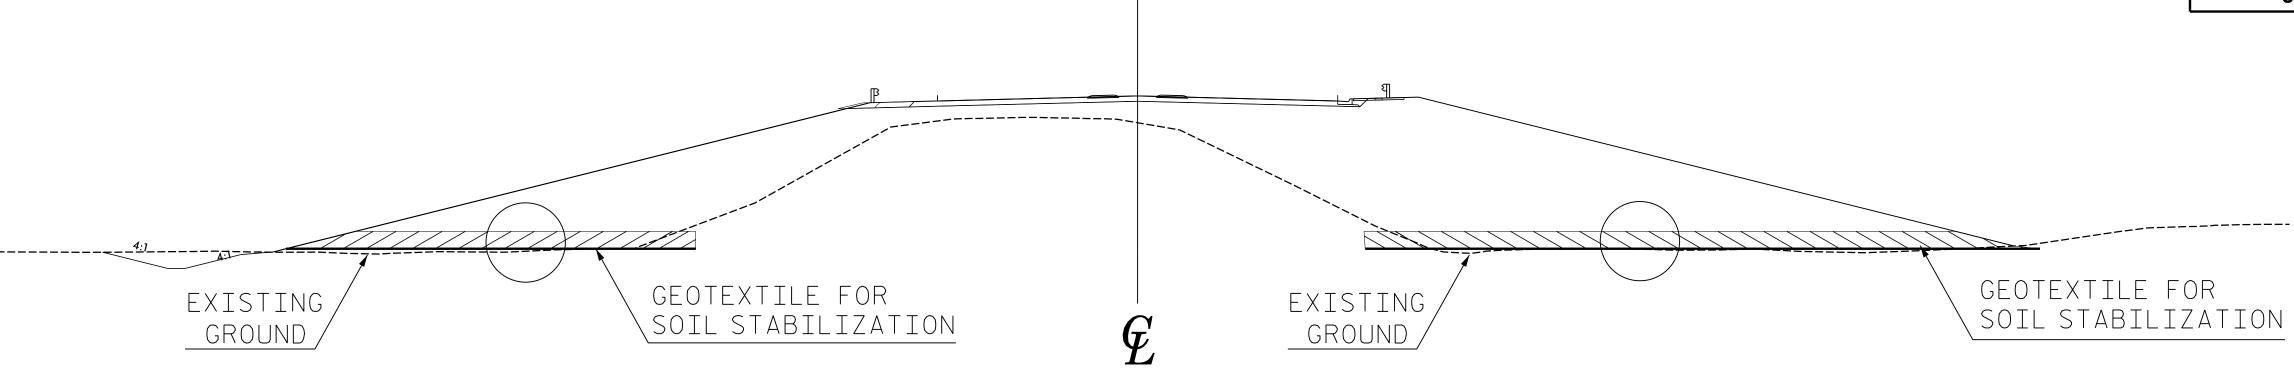

TYPICAL CROSS SECTION
N.T.S

## NOTES

- 1.AFTER CLEARING, PLACE GEOTEXTILE FOR SOIL STABILIZATION ON THE EXISTING GROUND IN ACCORDANCE WITH SECTION 270 OF THE STANDARD SPECIFICATIONS WITH THE EXCEPTION OF INSTALLING GEOTEXTILES WITH THE ROLL DIRECTION PERPENDICULAR TO THE CENTERLINE OF THE ROADWAY.
- 2.PLACE 3 FEET OF SELECT GRANULAR MATERIAL ON THE GEOTEXTILE PER SECTION 265 OF THE STANDARD SPECIFICATIONS.
- 3.GEOTEXTILE FOR SOIL STABILIZATION SHOULD BE USED IN THE FOLLOWING LOCATIONS AND AT OTHER LOCATIONS AT THE DISCRETION OF THE ENGINEER.

LINE	STATIONS	OFFSET	
-L-	33+40 TO 45+00	RT	
- Y 1 -	34+30 TO 35+30	RT	
-Y2-	16+25 TO 18+75	LT & RT	
-RPA-	19+50 TO 22+00	LT & RT	

4.ENGINEER MAY DETERMINE IF CONDITIONS WARRANT INSTALLATION OF THE WORKING PLATFORM.

PREPARED BY : M. SWEITZER	DATE : 11/2023
REVIEWED BY : J. BATTS	DATE : 11/2023

18 INCHES MIN.OVERLAP


MACHINE OR ROLL DIRECTION

CONTINUOUS SHEET

MACHINE OR ROLL DIRECTION

CONTINUOUS SHEET

GEOTEXTILE OVERLAP DETAIL
N.T.S

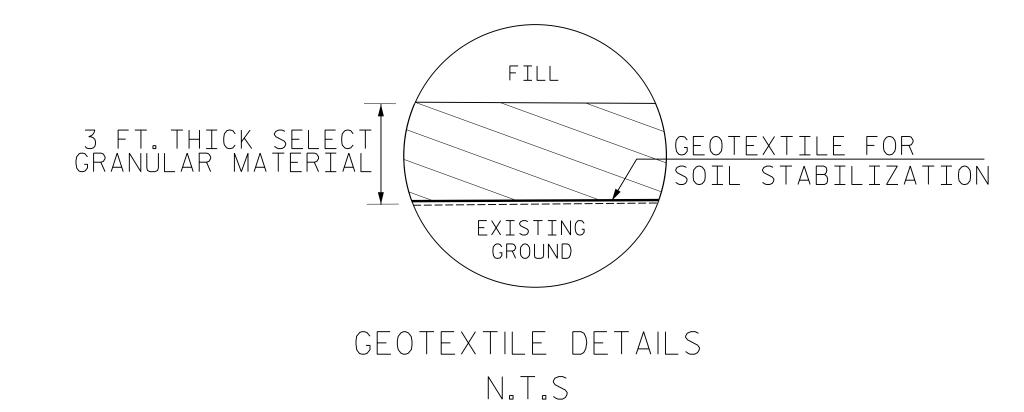

P: (919) 878-9560
8601 Six Forks Road, Forum 1, Suite 700
Raleigh, North Carolina 27615-3960
NC License No. F-0112
Engineers | Construction Managers | Planners | Scientists
www.rkk.com

Responsive People | Creative Solutions

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

GEOTECHNICAL ENGINEERING UNIT

GE	OTEXTILE FOR
SOIL	STABILIZATION
	DETAIL

REVISIONS									
NO.	BY	DATE	NO.	BY	DATE				