

REFERENCE: R-5799

PROJECT: 44984

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY TRANSYLVANIA
PROJECT DESCRIPTION US 64 /NC 280 & US 64 /
US 276 INTERSECTION IMPROVEMENTS
SITE DESCRIPTION CULVERT NO. 0099 ON US 64 OVER
TURKEY CREEK

CONTENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4-5	PROFILES
6-7	BORE LOGS
8	LABORATORY TEST SUMMARY
9	SITE PHOTO

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	R-5799	1	9

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT 1919 TOTTENHAM ST. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

R. TOOTHMAN
G. F. THILL

INVESTIGATED BY G. F. THILL
DRAWN BY G. F. THILL
CHECKED BY A. F. RIGGS
SUBMITTED BY J. P. MANKE
DATE NOVEMBER 2019

Prepared in the Office of:








SIGNATURE DATE

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED



NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT


SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS


SOIL DESCRIPTION		GRADATION		ROCK DESCRIPTION		TERMS AND DEFINITIONS			
SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 208, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>		WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.		HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:		ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (ROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (IN OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.			
SOIL LEGEND AND AASHTO CLASSIFICATION		ANGULARITY OF GRAINS THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.		WEATHERED ROCK (WR)  NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.		CRYSTALLINE ROCK (CR)  FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.			
MINERALOGICAL COMPOSITION MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.		COMPRESSIBILITY SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50		NON-CRYSTALLINE ROCK (NCR)  FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.		COASTAL PLAIN SEDIMENTARY ROCK (CP)  COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.			
PERCENTAGE OF MATERIAL		GROUND WATER  WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP		WEATHERING		FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.			
ORGANIC MATERIAL TRACE OF ORGANIC MATTER 2 - 3% LITTLE ORGANIC MATTER 3 - 5% MODERATELY ORGANIC 5 - 10% HIGHLY ORGANIC > 10%		SILT - CLAY SOILS 3 - 5% 5 - 12% 12 - 20% > 20%		OTHER MATERIAL TRACE 1 - 10% LITTLE 10 - 20% SOME 20 - 35% HIGHLY 35% AND ABOVE		VERY SLIGHT (IV SLI.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.			
TEXTURE OR GRAIN SIZE		MISCELLANEOUS SYMBOLS		MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.		SLIGHT (SLI.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.			
CONSISTENCY OR DENSENESS		RECOMMENDATION SYMBOLS		MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <i>IF TESTED, WOULD YIELD SPT REFUSAL</i>		SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <i>IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF</i>			
PRIMARY SOIL TYPE		ABBREVIATIONS		VERY SEVERE (IV SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. <i>IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF</i>		COMPLETE ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.			
GENERAL CLASS.		AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - COARSE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY		MED. - MEDIUM MICA. - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILTY, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY		VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ_d - DRY UNIT WEIGHT SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO			
GENERAL CLASS.		UNDERCUT SHALLOW UNDERCUT		UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK		UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL			
GENERAL CLASS.		U.S. STD. SIEVE SIZE OPENING (MM) 4 10 40 60 200 270 4.75 2.00 0.42 0.25 0.075 0.053		SOIL MOISTURE - CORRELATION OF TERMS		FRACURE SPACING			
GENERAL CLASS.		SOIL MOISTURE SCALE (ATTERBERG LIMITS)		FIELD MOISTURE DESCRIPTION		GUIDE FOR FIELD MOISTURE DESCRIPTION			
GENERAL CLASS.		LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SHRINKAGE LIMIT		- SATURATED - (SAT.) - WET - (W) - MOIST - (M) - DRY - (D)		USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE SOLID; AT OR NEAR OPTIMUM MOISTURE REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE			
GENERAL CLASS.		PLASTICITY		EQUIPMENT USED ON SUBJECT PROJECT		BEDDING			
GENERAL CLASS.		NON PLASTIC 0-5 SLIGHTLY PLASTIC 6-15 MODERATELY PLASTIC 16-25 HIGHLY PLASTIC 26 OR MORE		DRILL UNITS: <input type="checkbox"/> CME-45C <input checked="" type="checkbox"/> CME-55 <input type="checkbox"/> CME-550 <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST		ADVANCING TOOLS: <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input checked="" type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input type="checkbox"/> TRICONE <input type="checkbox"/> *STEEL TEETH <input type="checkbox"/> TRICONE <input type="checkbox"/> *TUNG-CARB. <input type="checkbox"/> CORE BIT		TERM SPACING THICKNESS VERY WIDE MORE THAN 10 FEET 4 FEET WIDE 3 TO 10 FEET 1.5 - 4 FEET MODERATELY CLOSE 1 TO 3 FEET 0.16 - 1.5 FEET CLOSE 0.16 TO 1 FOOT 0.03 - 0.16 FEET VERY CLOSE LESS THAN 0.16 FEET 0.008 - 0.03 FEET < 0.008 FEET	
GENERAL CLASS.		COLOR		<input type="checkbox"/> -B _____ <input type="checkbox"/> -H _____ <input type="checkbox"/> -N _____		INDURATION			
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-BROWN). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.		<input type="checkbox"/> CORE BIT <input type="checkbox"/> _____		HAND TOOLS: <input type="checkbox"/> POST HOLE DIGGER <input type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST		FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC. FRIABLE RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE. MODERATELY INDURATED GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER. INDURATED GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER. EXTREMELY INDURATED SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.		GENERAL CLASS.			
GENERAL CLASS									

SKEW ANGLE = 90°

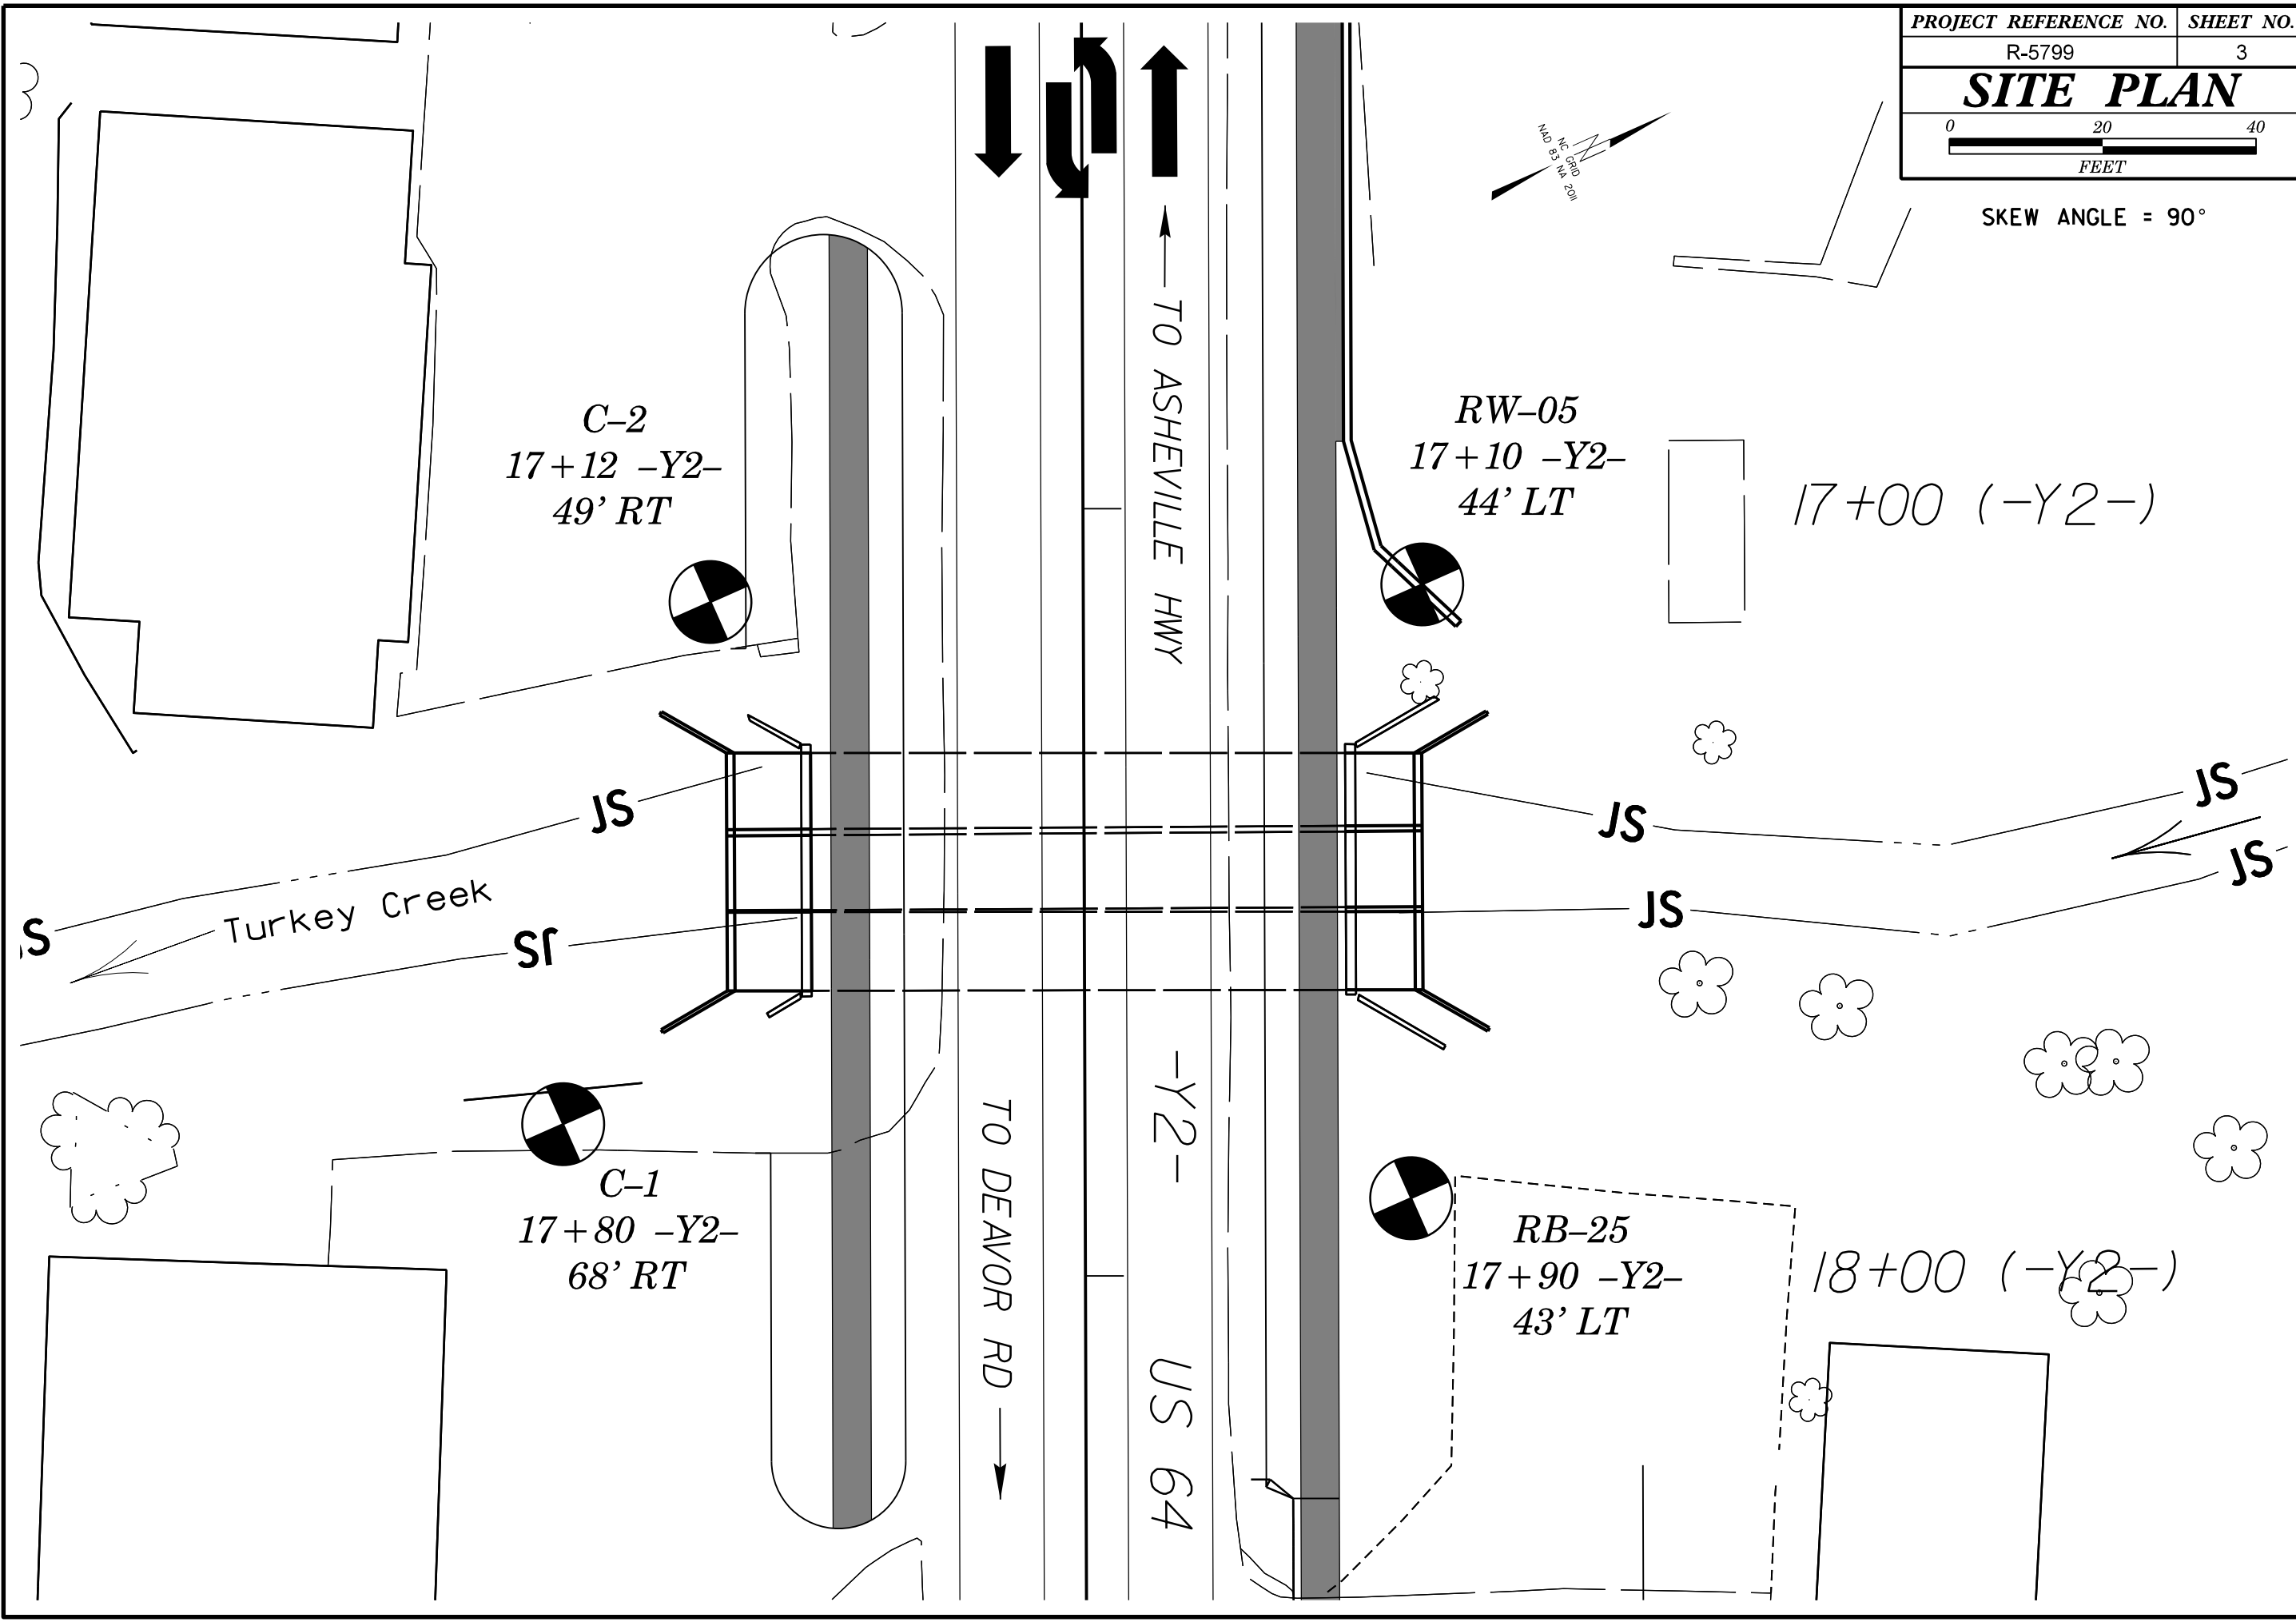

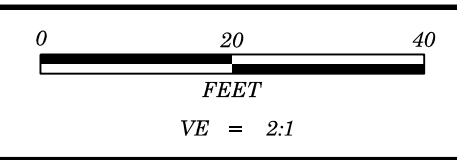


PROJECT REFERENCE NO.	SHEET NO.
R-5799	4
PROFILE 44' LEFT OF -Y2- (US 64) OF CULVERT EXTENSION AT TURKEY CREEK	

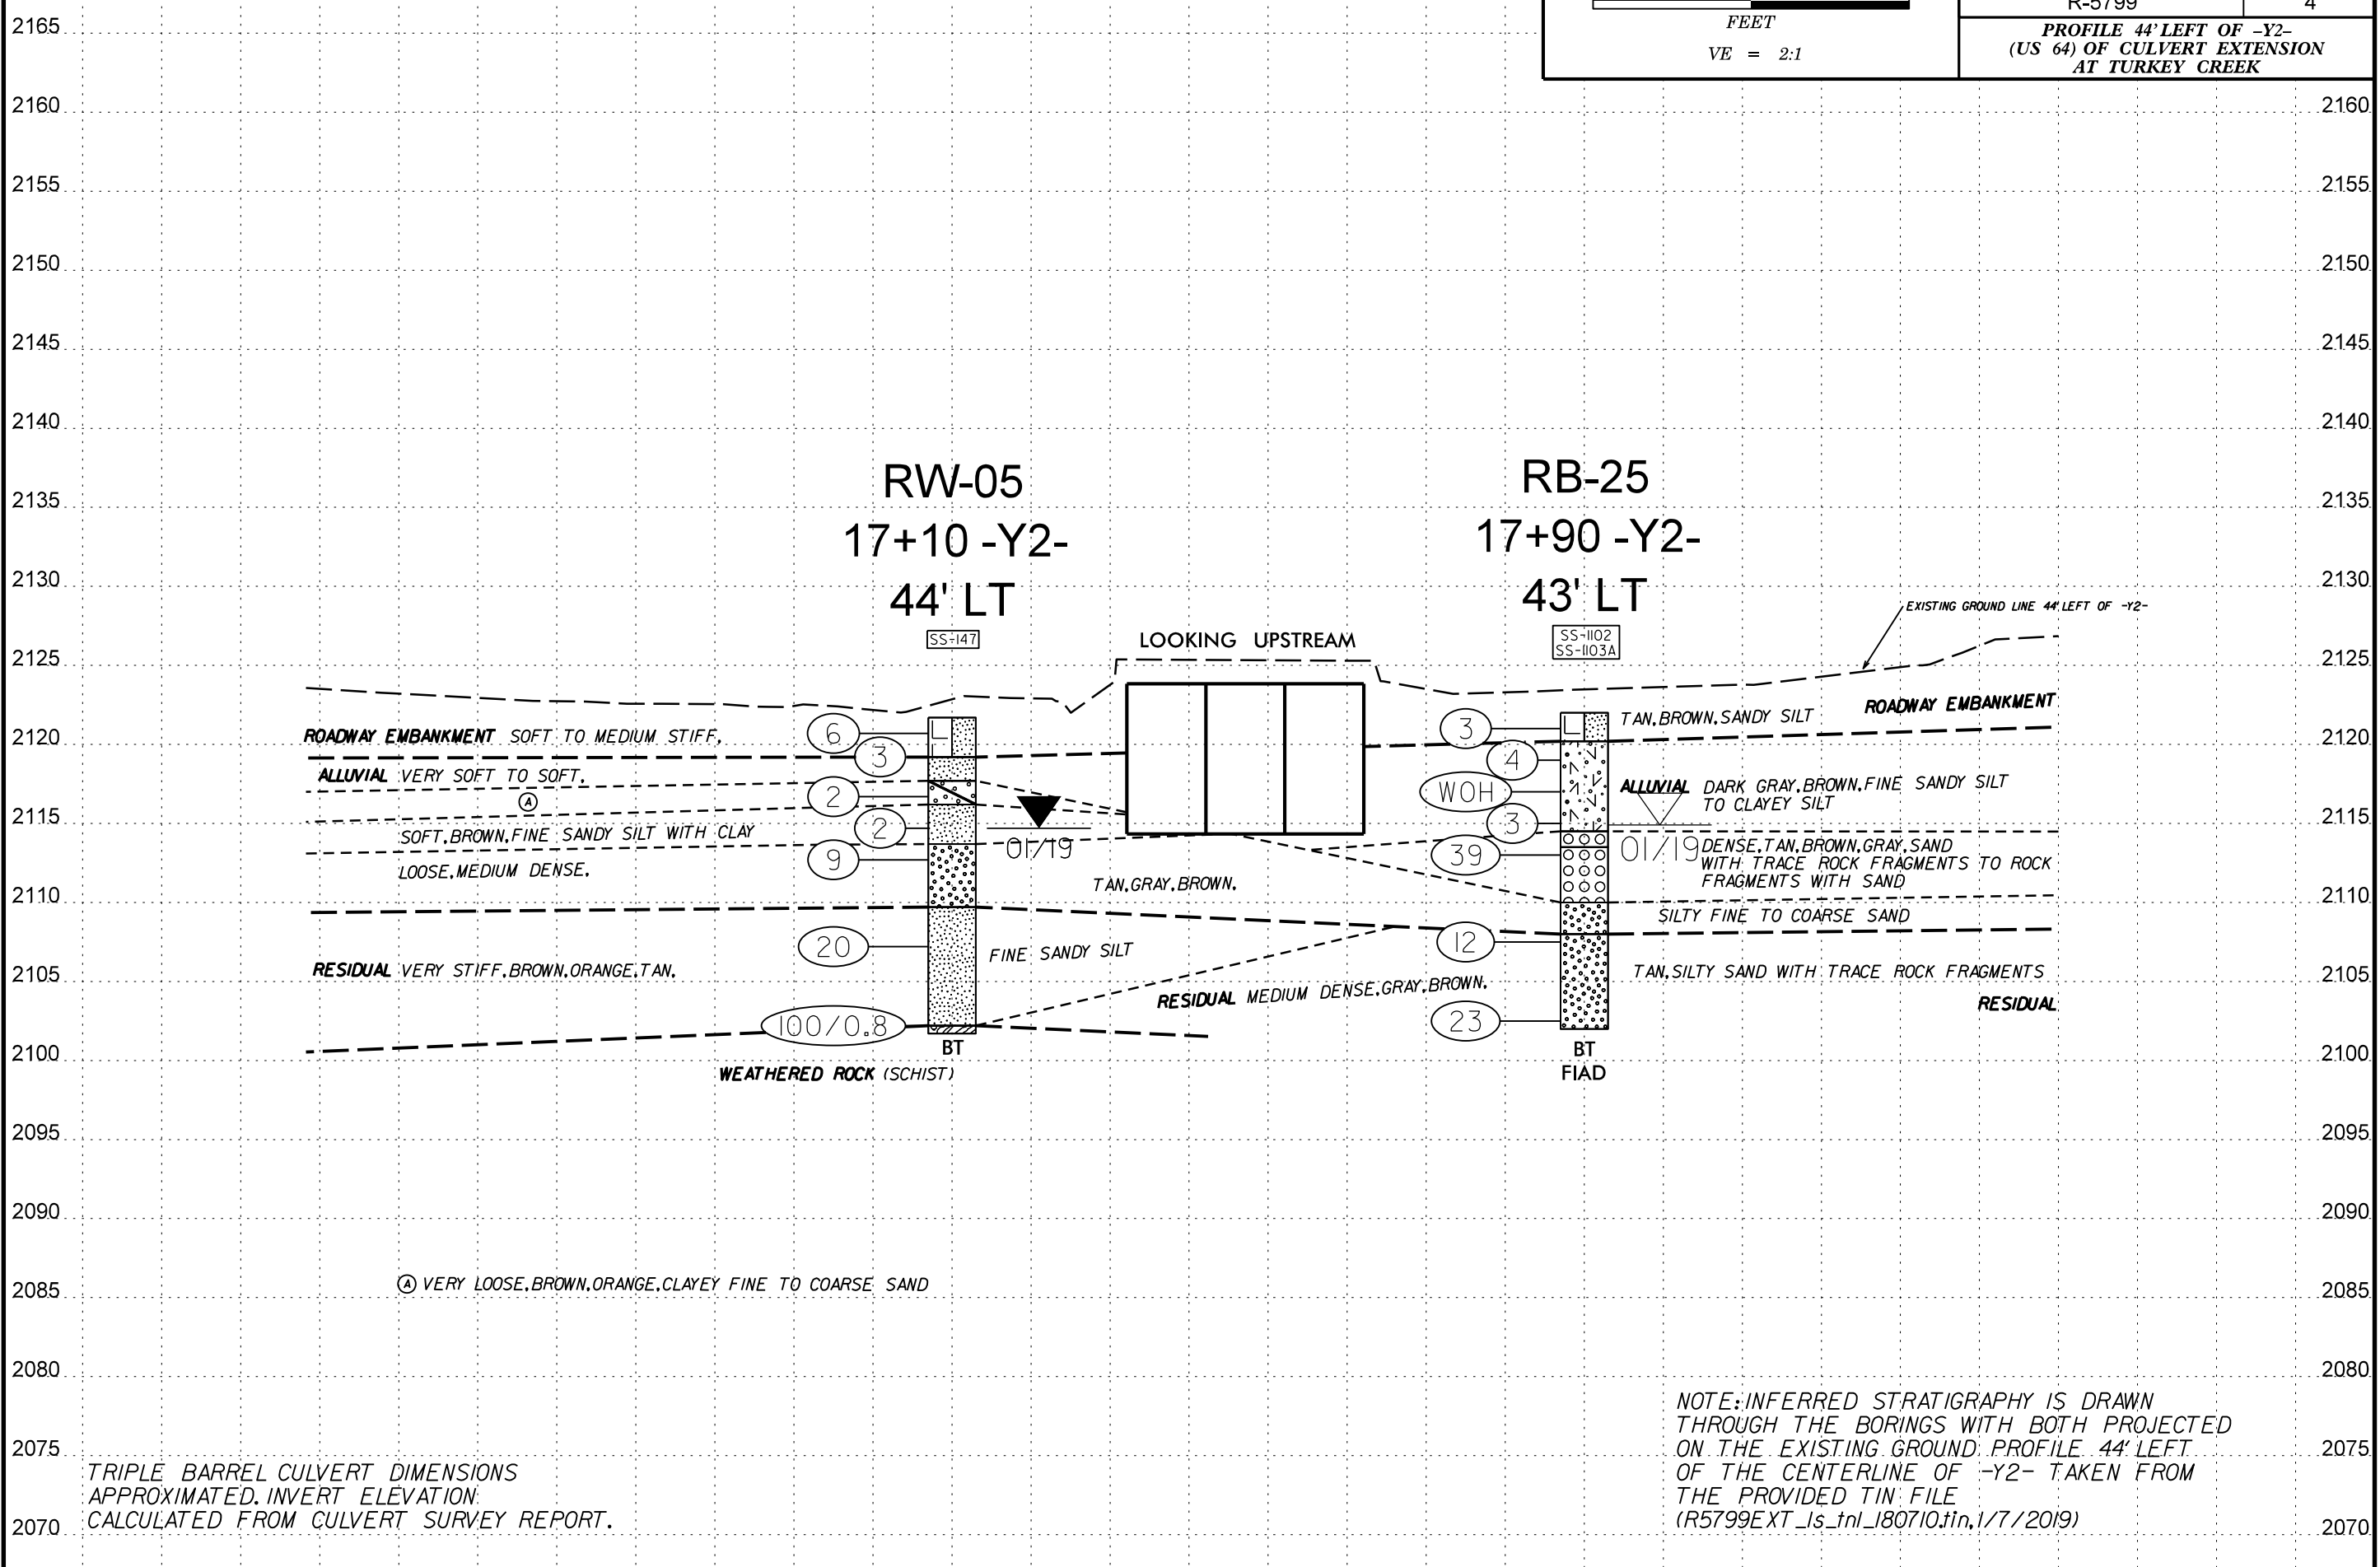


TRIPLE BARREL CULVERT DIMENSIONS APPROXIMATED. INVERT ELEVATION CALCULATED FROM CULVERT SURVEY REPORT.

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ON THE EXISTING GROUND PROFILE 44' LEFT OF THE CENTERLINE OF -Y2- TAKEN FROM THE PROVIDED TIN FILE (R5799EXT_Is_tnl_180710.tin, 1/7/2019)

16+10 16+30 16+50 16+70 16+90 17+10 17+30 17+50 17+70 17+90 18+10 18+30 18+50 18+70

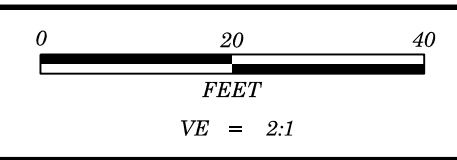

PROJECT REFERENCE NO.	SHEET NO.
R-5799	5
PROFILE 46' RIGHT OF -Y2- (US 64) OF CULVERT EXTENSION AT TURKEY CREEK	

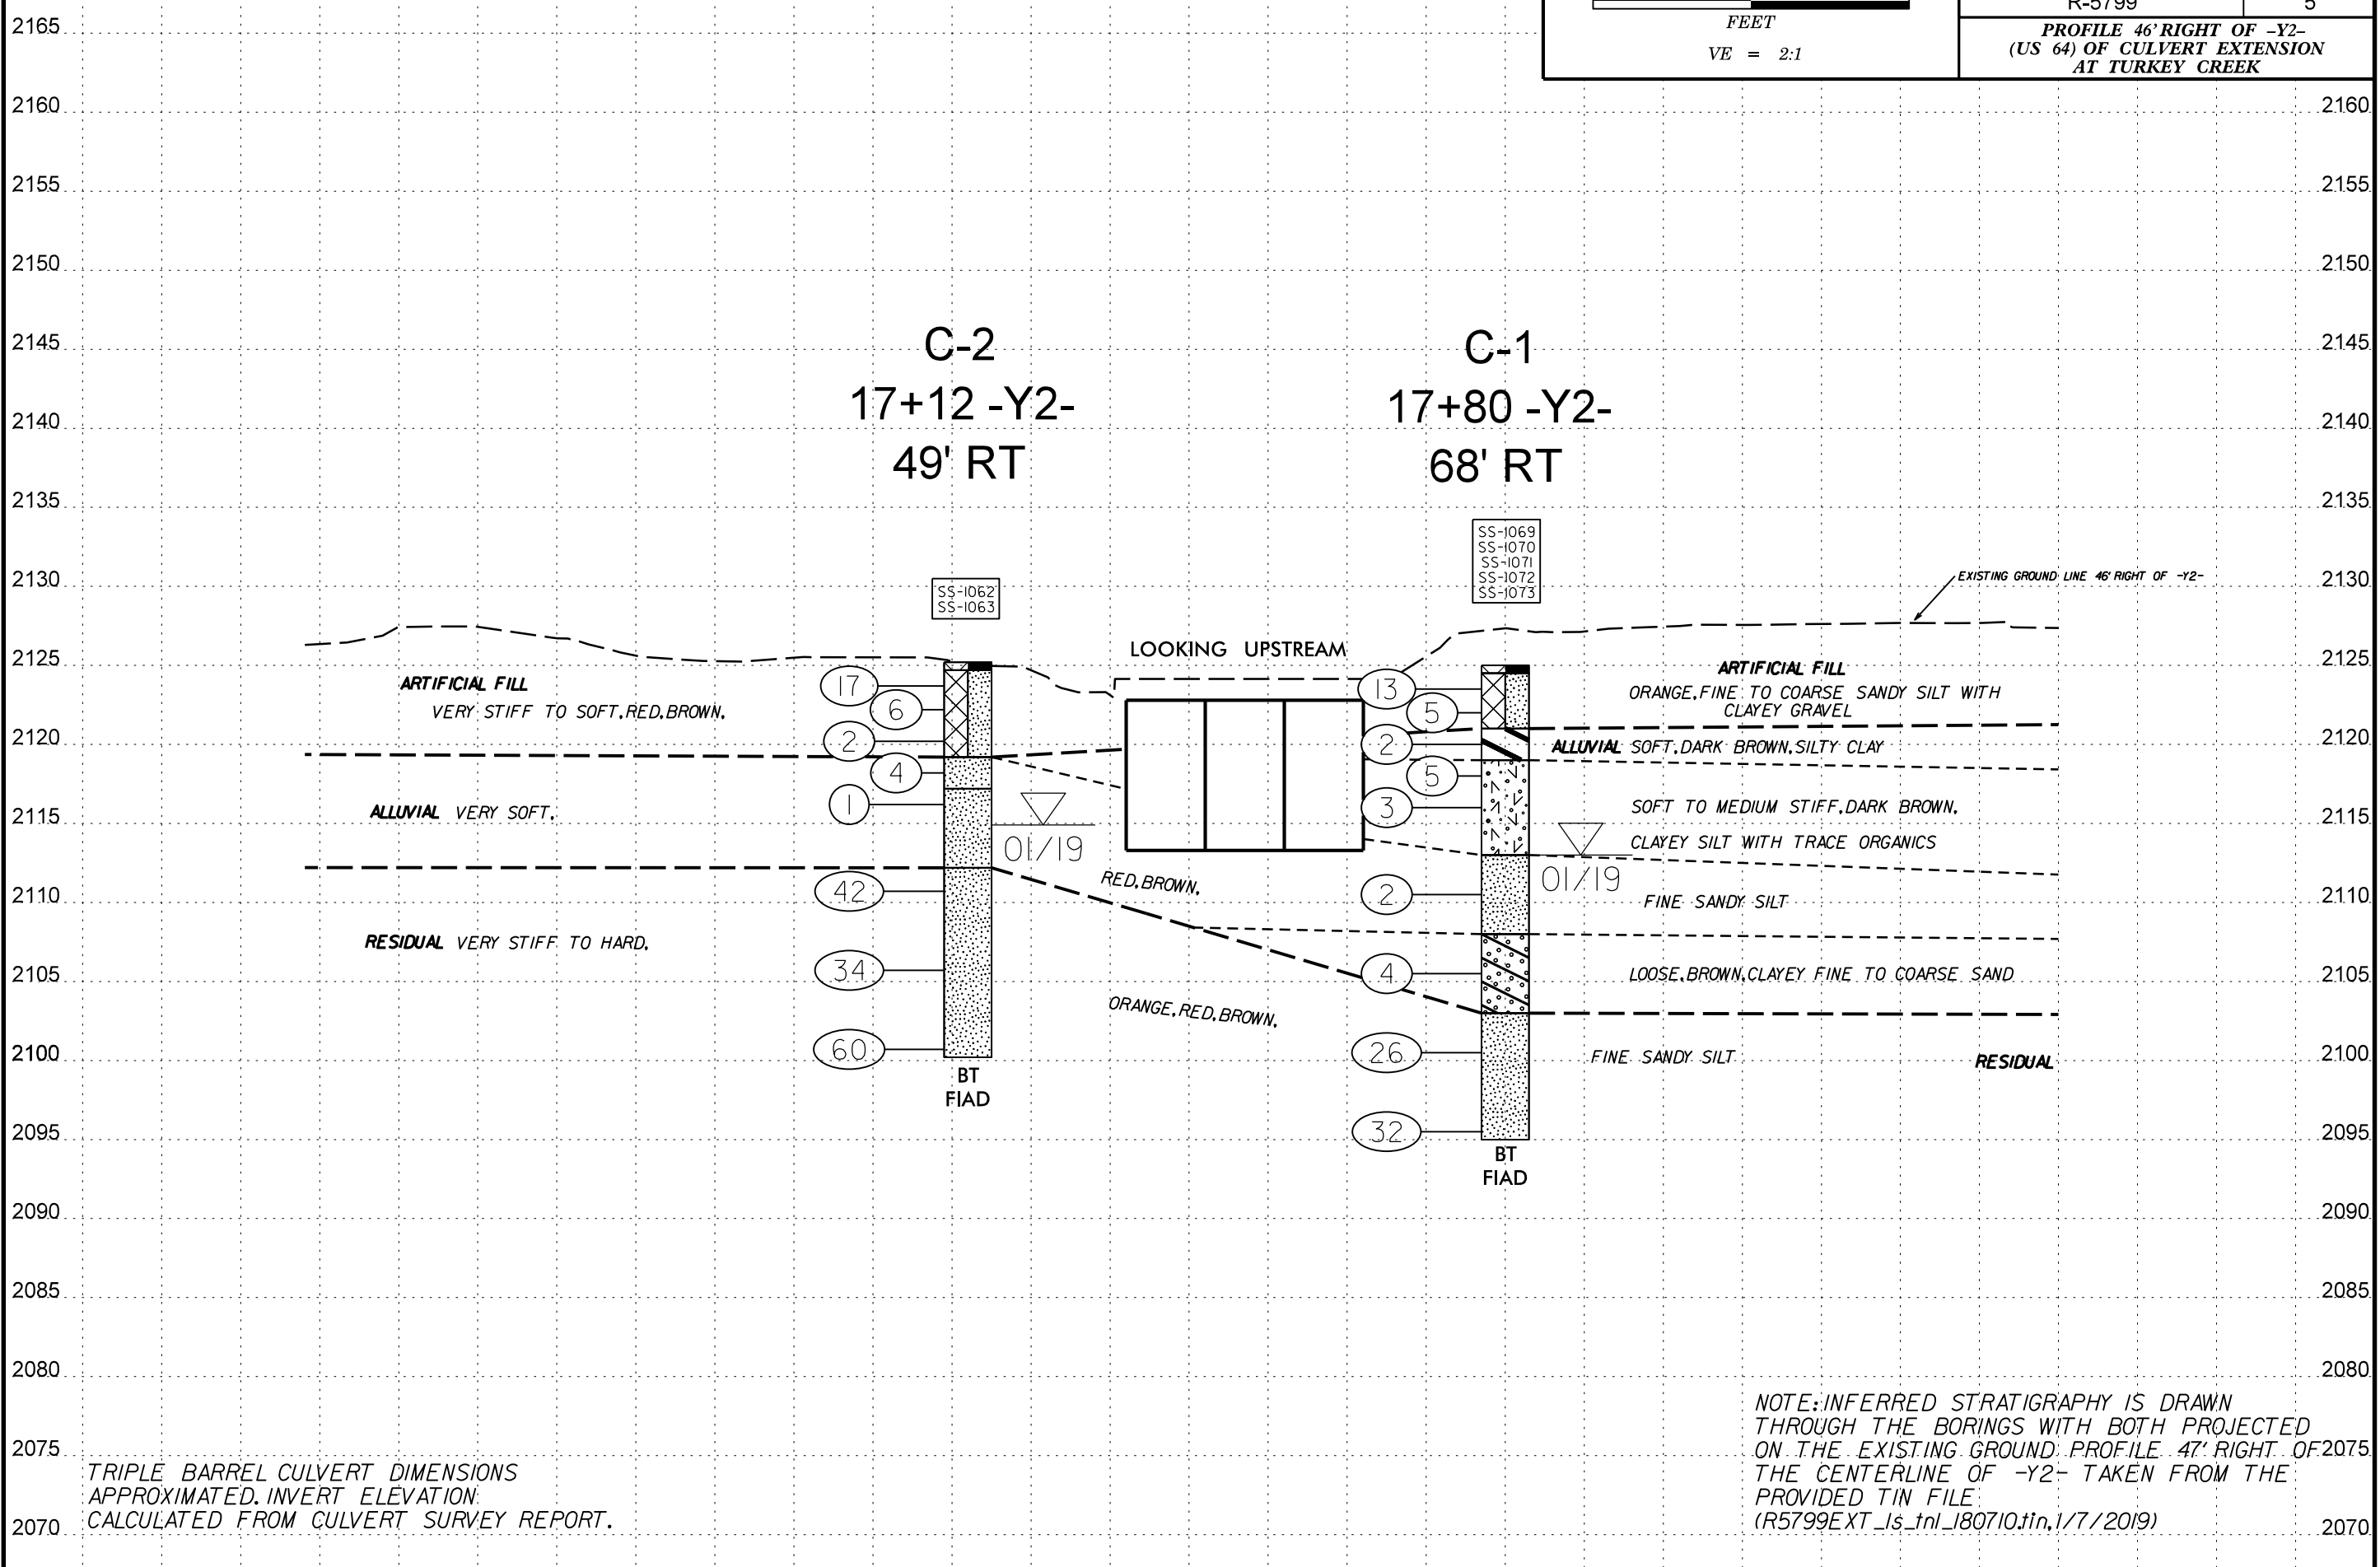

TRIPLE BARREL CULVERT DIMENSIONS APPROXIMATED. INVERT ELEVATION CALCULATED FROM CULVERT SURVEY REPORT.

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ON THE EXISTING GROUND PROFILE 47' RIGHT OF THE CENTERLINE OF -Y2- TAKEN FROM THE PROVIDED TIN FILE (R5799EXT_Is_tnl_180710.tin, 1/7/2019)

16+10 16+30 16+50 16+70 16+90 17+10 17+30 17+50 17+70 17+90 18+10 18+30 18+50 18+70

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 44984.1.1		TIP R-5799		COUNTY TRANSYLVANIA		GEOLOGIST Thill, G. F.									
SITE DESCRIPTION HENDERSONVILLE HIGHWAY							GROUND WTR (ft)								
BORING NO. RB-25		STATION 17+90		OFFSET 43 ft LT		ALIGNMENT -Y2-									
COLLAR ELEV. 2,122.0 ft		TOTAL DEPTH 20.0 ft		NORTHING 574,944		EASTING 895,494									
DRILL RIG/HAMMER EFF./DATE TRI0055 CME-55 87% 03/19/2018				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER Toothman, R.		START DATE 01/25/19		COMP. DATE 01/25/19		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2125															
	2,122.0	0.0												2,122.0	0.0
2120	2,120.0	2.0	WOH	2	1							M	ROADWAY EMBANKMENT TAN, BROWN, SANDY SILT	1.8	
	2,118.0	4.0	WOH	1	WOH							M	ALLUVIAL DARK GRAY, BROWN, CLAYEY SILT		
2115	2,116.0	6.0	WOH	1	2							SS-1102		67%	
	2,114.0	8.0	WOH	1	2							SS-1103A			
				1	17	22						W	TAN, BROWN, SAND WITH TRACE ROCK FRAGMENTS	7.5	
2110												W	GRAY, ROCK FRAGMENTS WITH SAND	8.5	
	2,108.5	13.5		5	5	7						W	GRAY, BROWN, SILTY SAND	12.0	
2105	2,103.5	18.5		17	12	11						W	RESIDUAL GRAY, BROWN, TAN, SILTY SAND WITH ROCK FRAGMENTS	14.0	
												M	Boring Terminated at Elevation 2,102.0 ft IN RESIDUAL SILTY SAND	20.0	

WBS 44984.1.1		TIP R-5799		COUNTY TRANSYLVANIA		GEOLOGIST Thill, G. F.									
SITE DESCRIPTION RETAINING WALL 2, EAST END (PISGAH FISH CAMP)							GROUND WTR (ft)								
BORING NO. RW-05		STATION 17+10		OFFSET 44 ft LT		ALIGNMENT -Y2-									
COLLAR ELEV. 2,121.7 ft		TOTAL DEPTH 20.0 ft		NORTHING 574,978		EASTING 895,421									
DRILL RIG/HAMMER EFF./DATE TRI0055 CME-55 87% 03/19/2018				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER Toothman, R.		START DATE 01/17/19		COMP. DATE 01/17/19		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2125															
	2,121.7	0.0												2,121.7	0.0
2120	2,119.7	2.0		1	3	3						M	ROADWAY EMBANKMENT TAN, BROWN, SANDY SILT	2.5	
	2,117.7	4.0	WOH	1	1							M	ALLUVIAL BROWN, FINE SANDY SILT	4.0	
2115	2,115.7	6.0	WOH	1	1							W	BROWN-ORANGE, CLAYEY FINE TO COARSE SAND	5.5	
	2,113.7	8.0		8	6	3						W	BROWN, FINE SANDY SILT WITH CLAY TAN AND DARK BROWN, SILTY FINE TO COARSE SAND	8.0	
2110												M	RESIDUAL BROWN, ORANGE, AND TAN, FINE TO MEDIUM SANDY SILT	12.0	
	2,108.2	13.5		3	5	15						M		19.5	
2105	2,103.2	18.5		43	41	59/0.3						M	WEATHERED ROCK (SCHIST)	20.0	
													Boring Terminated at Elevation 2,101.7 ft IN WEATHERED ROCK (SCHIST)		

LABORATORY TESTING SUMMARY

PROJECT NUMBER: 44984

TIP: R-5799

COUNTY: TRANSYLVANIA

DESCRIPTION: US 64/NC 280 & US 64/US 276 INTERSECTION IMPROVEMENTS

Sample No.	Alignment	Station	Offset (feet)	Depth Interval (feet)	AASHTO Class.	L.L.	P.I.	% by Weight				% Retained #4 Sieve	% Passing (sieves)			% Moisture	% Organic
								Coarse Sand	Fine Sand	Silt	Clay		#10	#40	#200		
SS-147	-Y2-	17+10	44 LT	6-7.5	-	-	-	-	-	-	-	-	-	-	47.0	--	
SS-1062	-Y2-	17+12	49 RT	6-7.5	A-5	41	8	-	-	-	-	4	93	86	53	38.0	--
SS-1063	-Y2-	17+12	49 RT	9-9.5	A-4	38	7	-	-	-	-	5	92	86	66	38.0	--
SS-1069	-Y2-	17+80	68 RT	4-5.5	A-7-5	42	11	-	-	-	-	4	91	85	78	37.0	--
SS-1070	-Y2-	17+80	68 RT	6-7.5	A-4	40	8	-	-	-	-	10	85	76	60	40.0	--
SS-1071	-Y2-	17+80	68 RT	8-9.5	A-4	39.0	9.0	-	-	-	-	5	91	85	71	42.0	--
SS-1072	-Y2-	17+80	68 RT	13.5-15	-	-	-	-	-	-	-	5	92	83	41	50.0	--
SS-1073	-Y2-	17+80	68 RT	18.5-20	-	-	-	-	-	-	-	31	58	44	23	31.0	--
SS-1102	-Y2-	17+90	62 LT	4-5.5	-	-	-	-	-	-	-	1	98	96	75	67.0	--
SS-1103A	-Y2-	17+90	62 LT	6-7.5	-	-	-	-	-	-	-	6	85	61	27	32.0	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--
																	--

NP - NON-PLASTIC

 Certified Lab Technician Signature
 126-01-0910
 Certification Number

SITE PHOTOGRAPH

Culvert No. 0099 on -Y2- (US 64) over Turkey Creek

