PROJECT REFERENCE NO. U-5312

2C-4

02

Ш

CONCRET

0

2

SHEET 1 OF 1

846D01

ENGL

RATION HWAYS

LINA PORTATION IGHWAYS

Ŋ

9

CONCRETE

CURB

20

GUT

TER

ENGLISH

DETAIL

DRAWING

FOR

GENERAL NOTES:

-PLACE CONTRACTION JOINTS AT 10' INTERVALS, EXCEPT THAT A 15' SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 10' INTERVALS.


-JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER.

-CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OR FORMED BY OTHER APPROVED METHODS. MAKE NON-TEMPLATE FORMED JOINTS A MIN. OF $1\frac{1}{2}''$ DEEP.

-FILL ALL CONSTRUCTION JOINTS WITH JOINT FILLER AND SEALER.


-SPACE EXPANSION JOINTS AT 90' INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.

-SEE RDWY. STD. DWG. NO. 846.01, SHEET 2 OF 3 FOR PLACEMENT IN SUPERELEVATIONS. (USE 2'-6" CURB AND GUTTER RATES)

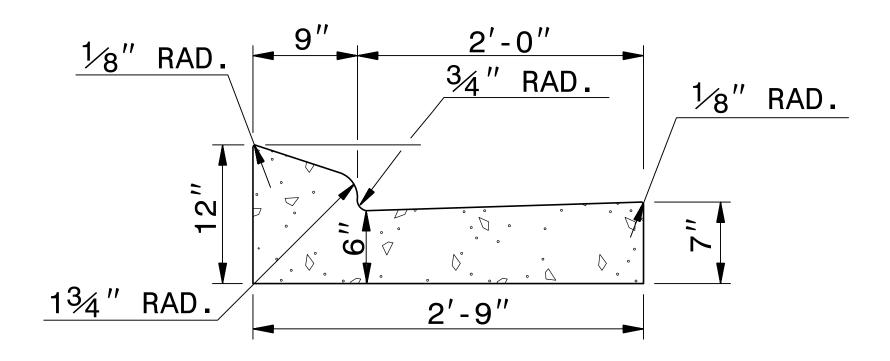


2'-9" CURB AND GUTTER

SECTION VIEW OF CURB AND GUTTER

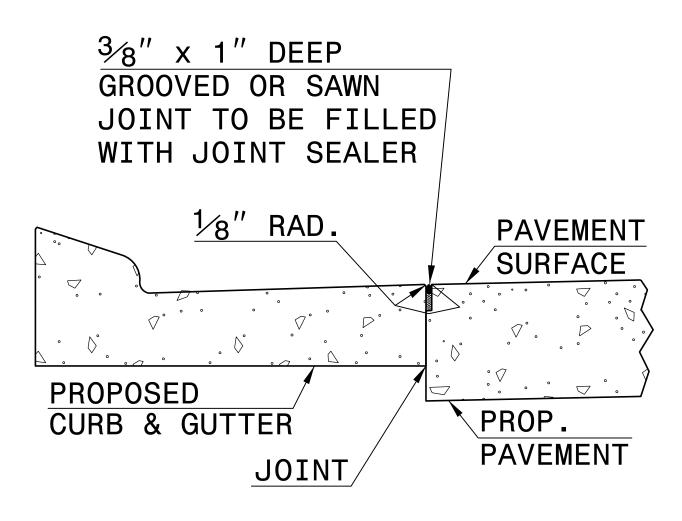

LONGITUDINAL JOINT

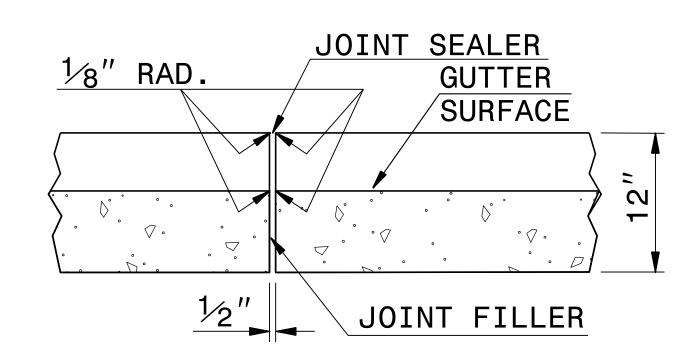

TRANSVERSE EXPANSION JOINT IN CURB AND GUTTER

SECTION VIEW OF JOINTS

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACT STANDARDS AND DEVELOPMENT UNIT Office 919-707-6950 FAX 919-250-4119

SEE PLATE FOR TITLE

ORIGINAL BY: STD. 846.01 DATE: MODIFIED BY: E.E. WARD DATE: 8-15-00

SHEET 1 OF 1 846D01

Nicole M. Hackler