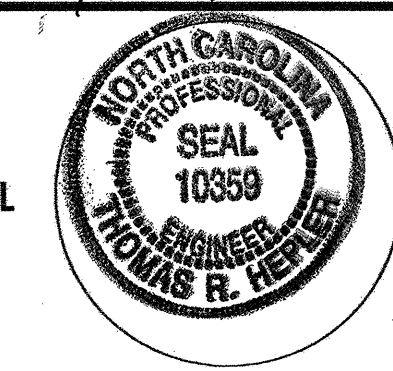



REVISIONS

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY	
PAVEMENT MARKING LINES				
TA	WHITE EDGELINE	THERMOPLASTIC (4", 90 mils)		
		5330 LF	TOTAL	5330 LF
TI	YELLOW DOUBLE CENTER LINE	THERMOPLASTIC (4", 120 mils)		
		5330 LF	TOTAL	5330 LF
COLD APPLIED PLASTIC (TYPE 2) (4")				
CA	WHITE EDGELINE	4000 LF		
CI	YELLOW DOUBLE CENTER LINE	4000 LF		
			TOTAL	8000 LF
PAVEMENT MARKERS				
MA	YELLOW & YELLOW	PERMANENT RAISED		
		59 EA	TOTAL	59 EA

SYSTEMS DESIGN CONSULTANTS
 1515 W. GARDNER STREET
 RALEIGH, NC 27603
 TEL: 919.788.0224
 FAX: 919.788.0232

APPROVED: <i>[Signature]</i> DATE: <i>4/1/08</i>	FINAL PAVEMENT MARKING SCHEDULE	
	SCALE:	REVISIONS
	DATE: 03/04/08	
	DWG. BY: JAP	
	DESIGN BY: JAP	
REVIEWED BY: RBE	CADD FILE	