


6/2/2023





FINAL PAVEMENT DESIGN	
C1	1.5" S9.5B
C2	3.0" S9.5B
C3	VARIABLE DEPTH S9.5B
D1	4.0" I19.0C
D2	VARIABLE DEPTH I19.0C
E1	4.0" B25.0C
E2	VARIABLE DEPTH B25.0C
K	12" CLASS IV SUBGRADE STAB.
N	GEOTEXTILE FOR SUBGRADE STABILIZATION
R	SHOULDER BERM GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT
V1	INCIDENTAL MILLING
V2	MILLING, 1.5" DEPTH
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

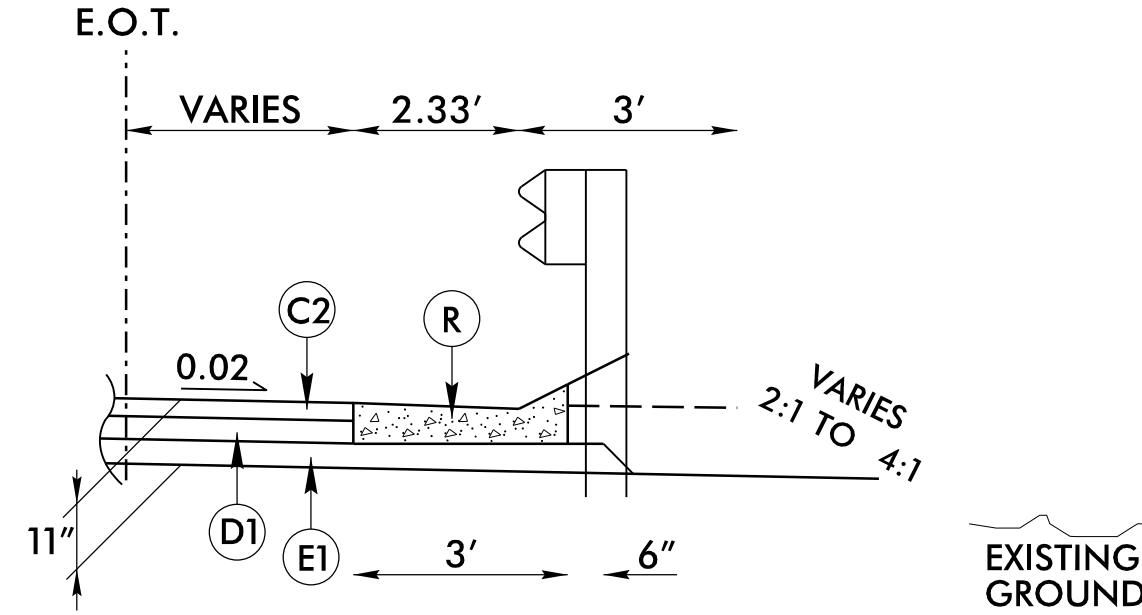

DETAIL OF SHOULDER BERM GUTTER

- L- STA. 20+34.00 TO STA. 21+92.90 (LT)
- L- STA. 24+90.30 TO STA. 26+26.00 (LT)
- L- STA. 25+35.90 TO STA. 29+79.20 (RT)
- L- STA. 29+29.00 TO STA. 29+43.00 (LT)

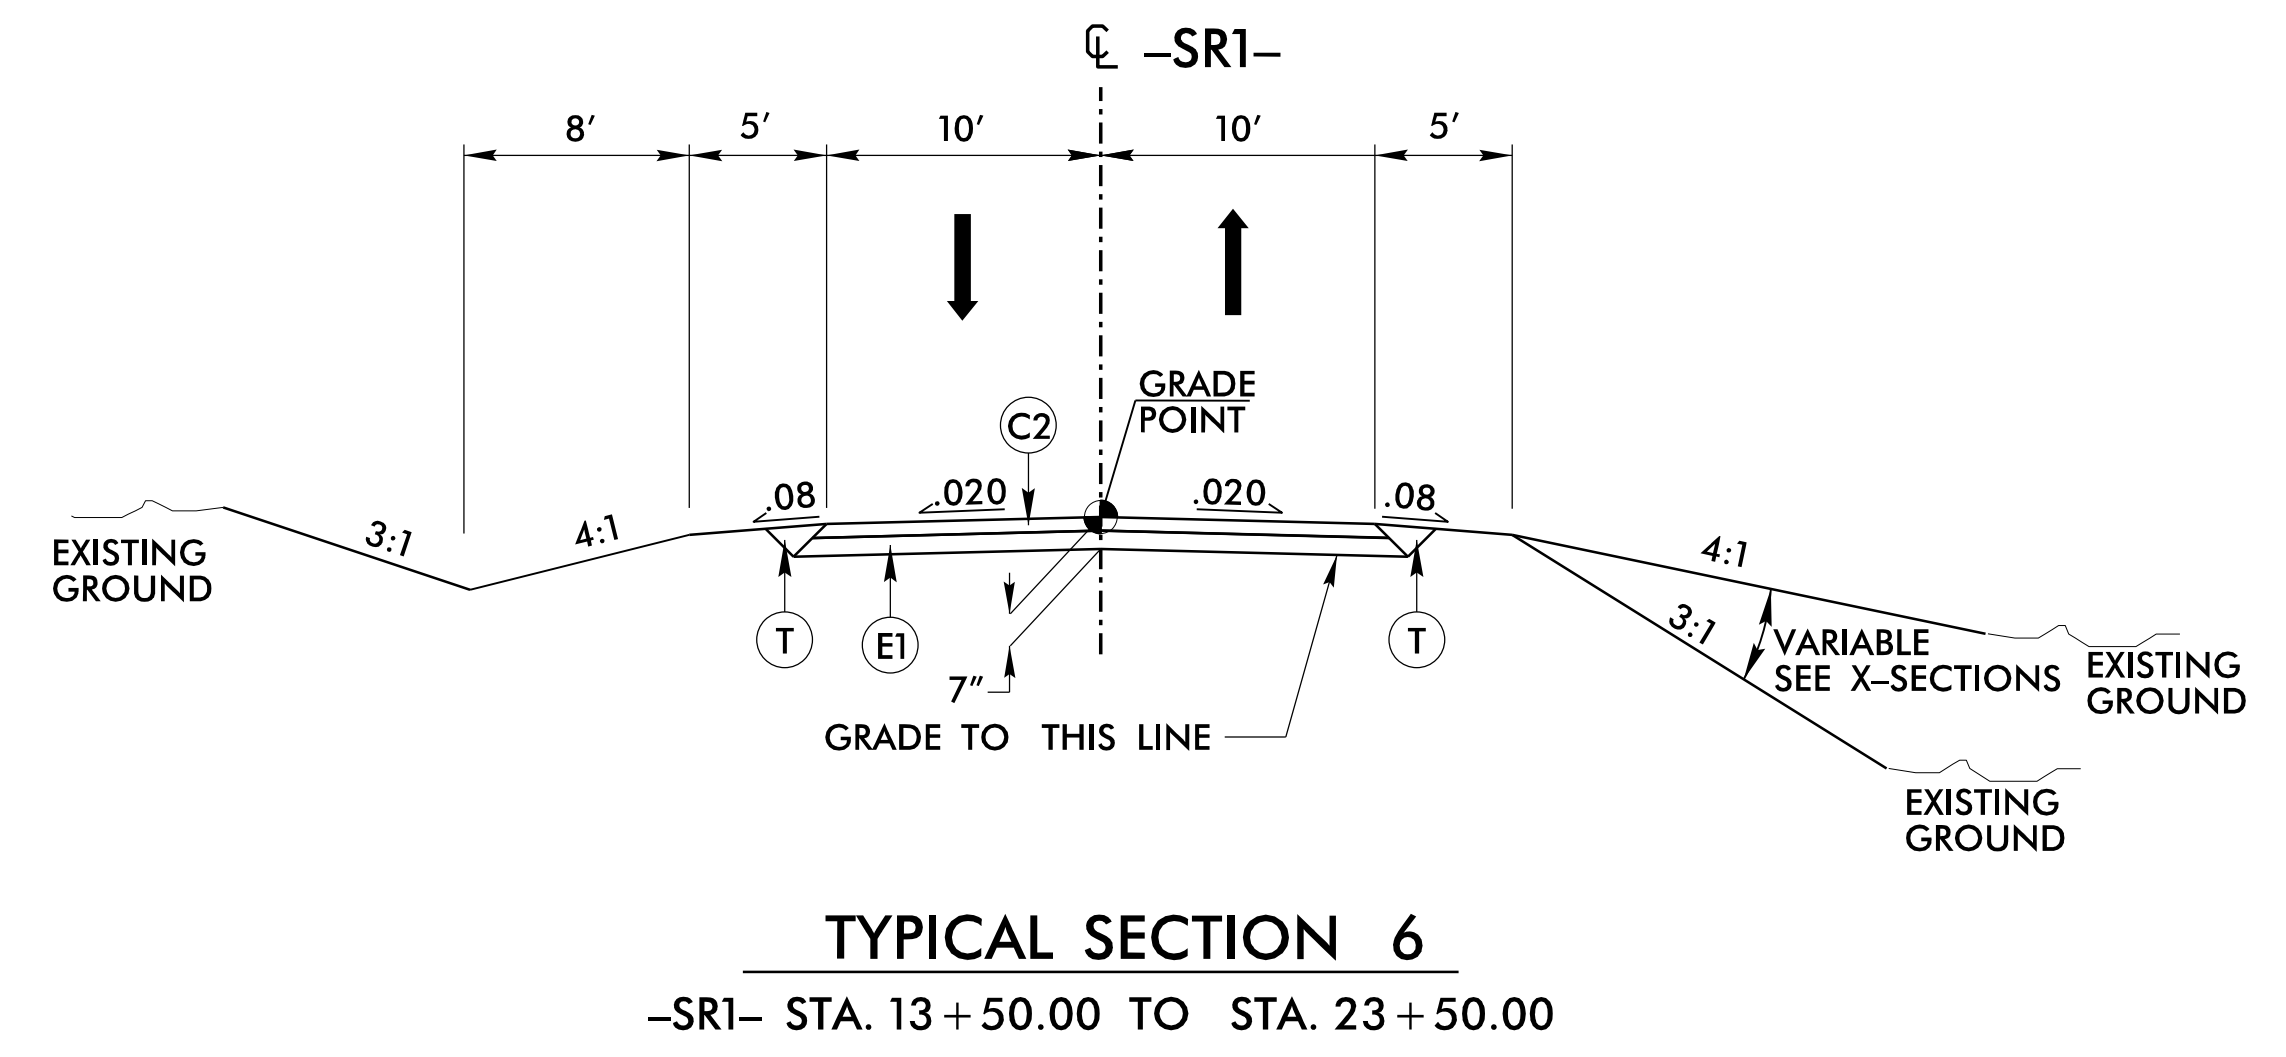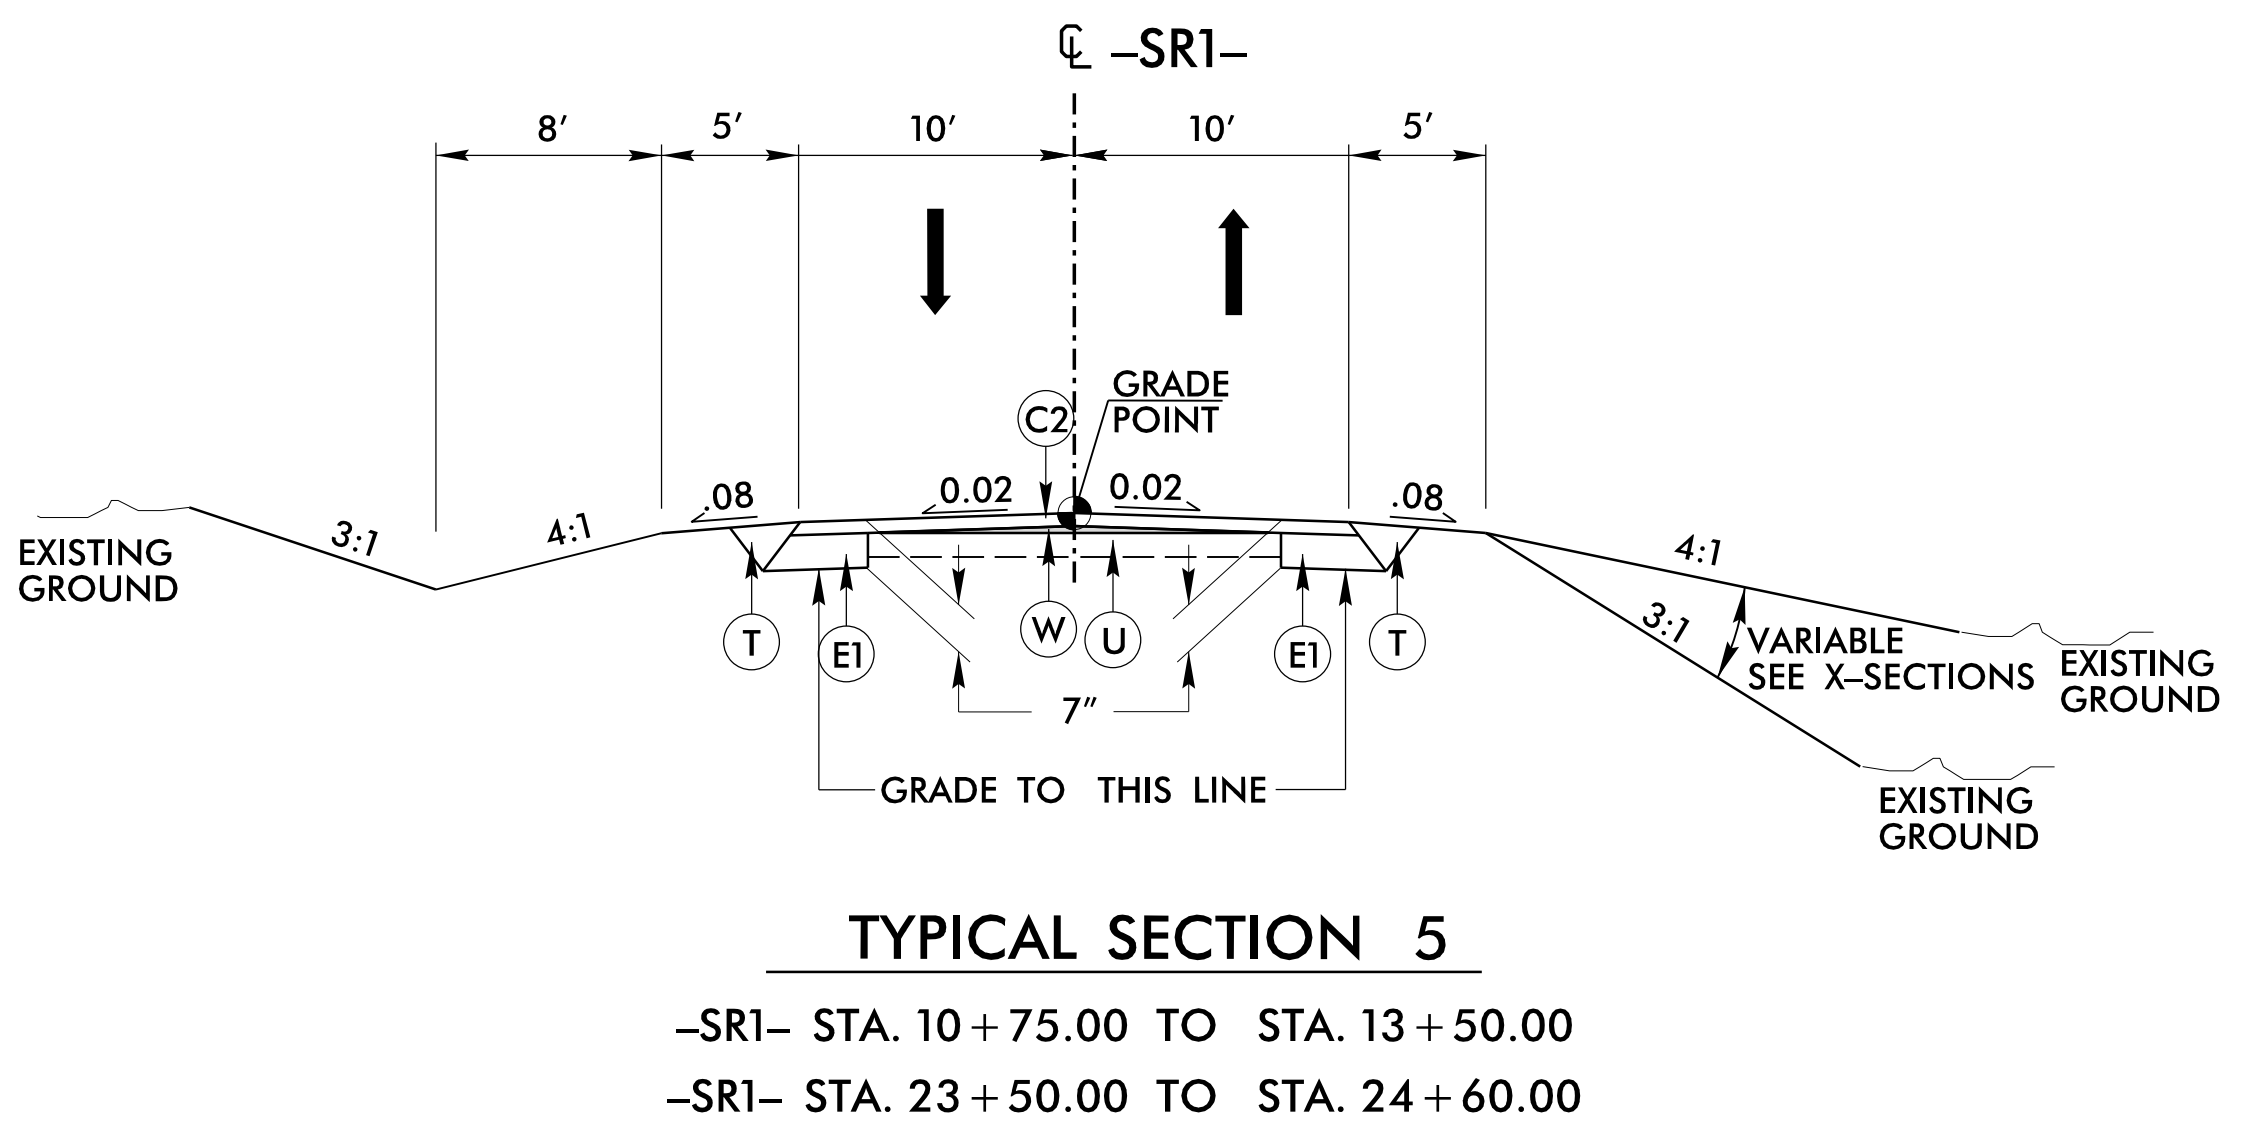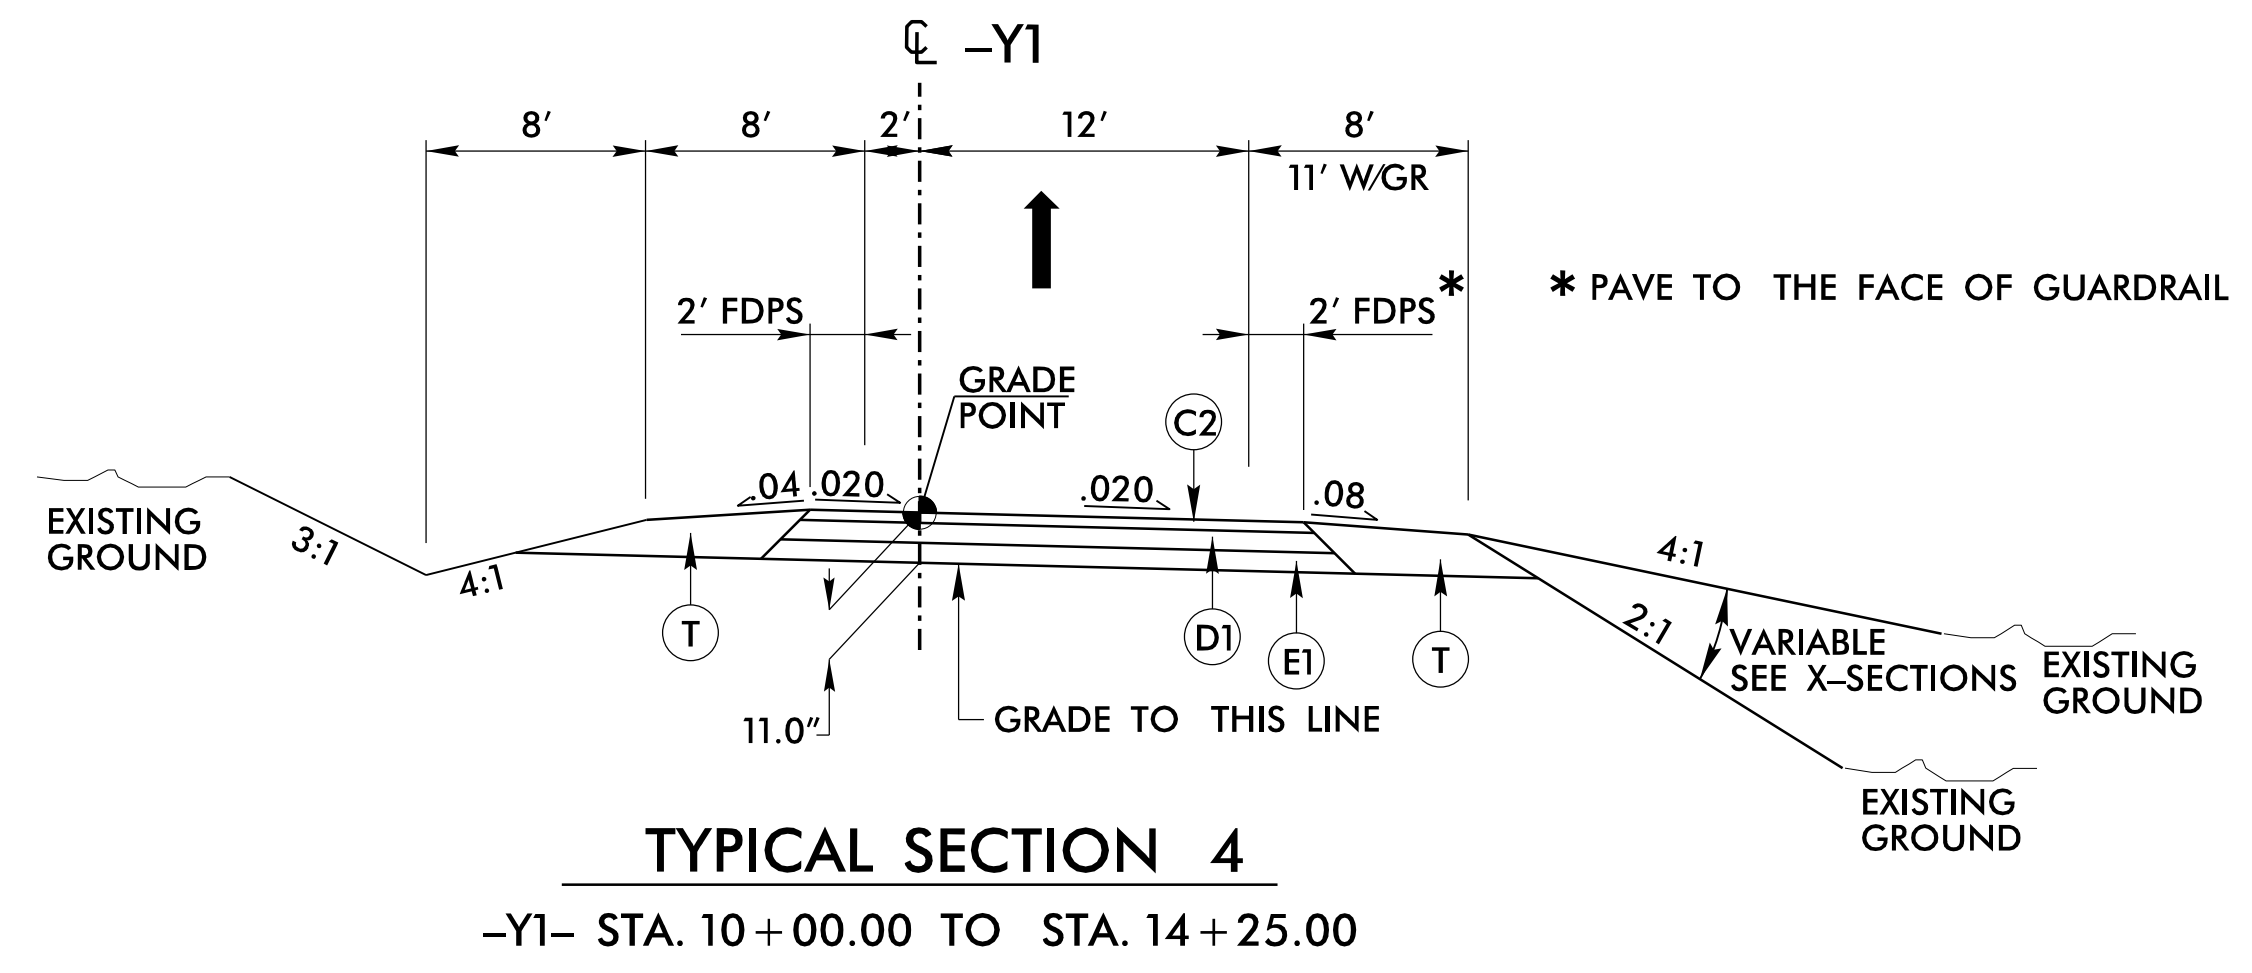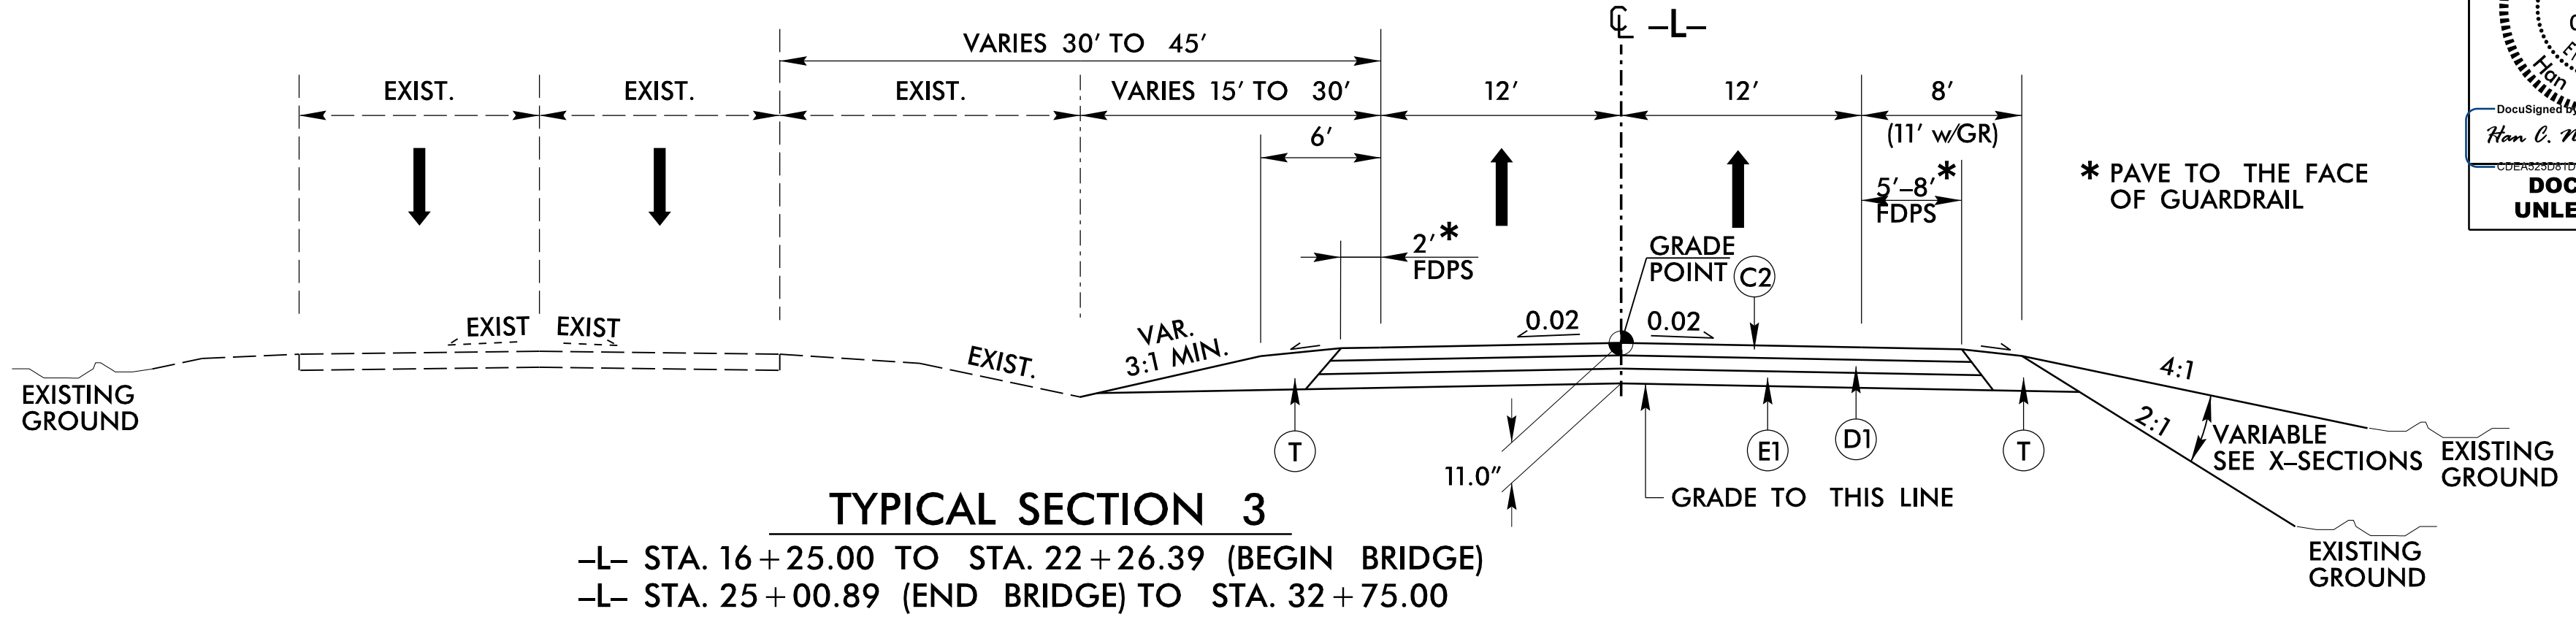

PROJECT REFERENCE NO. B-5981	SHEET NO. 2A-2
ROADWAY DESIGN ENGINEER SEAL 042662 Han C. Nguyen 09/20/2023	PAVEMENT DESIGN ENGINEER SEAL 022896 Clark S. Morrison 09/19/2023
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

13-SEP-2023 08:47 B5981_r.dwg tujp.dgn
 13-SEP-2023 08:47 B5981_r.dwg tujp.dgn