

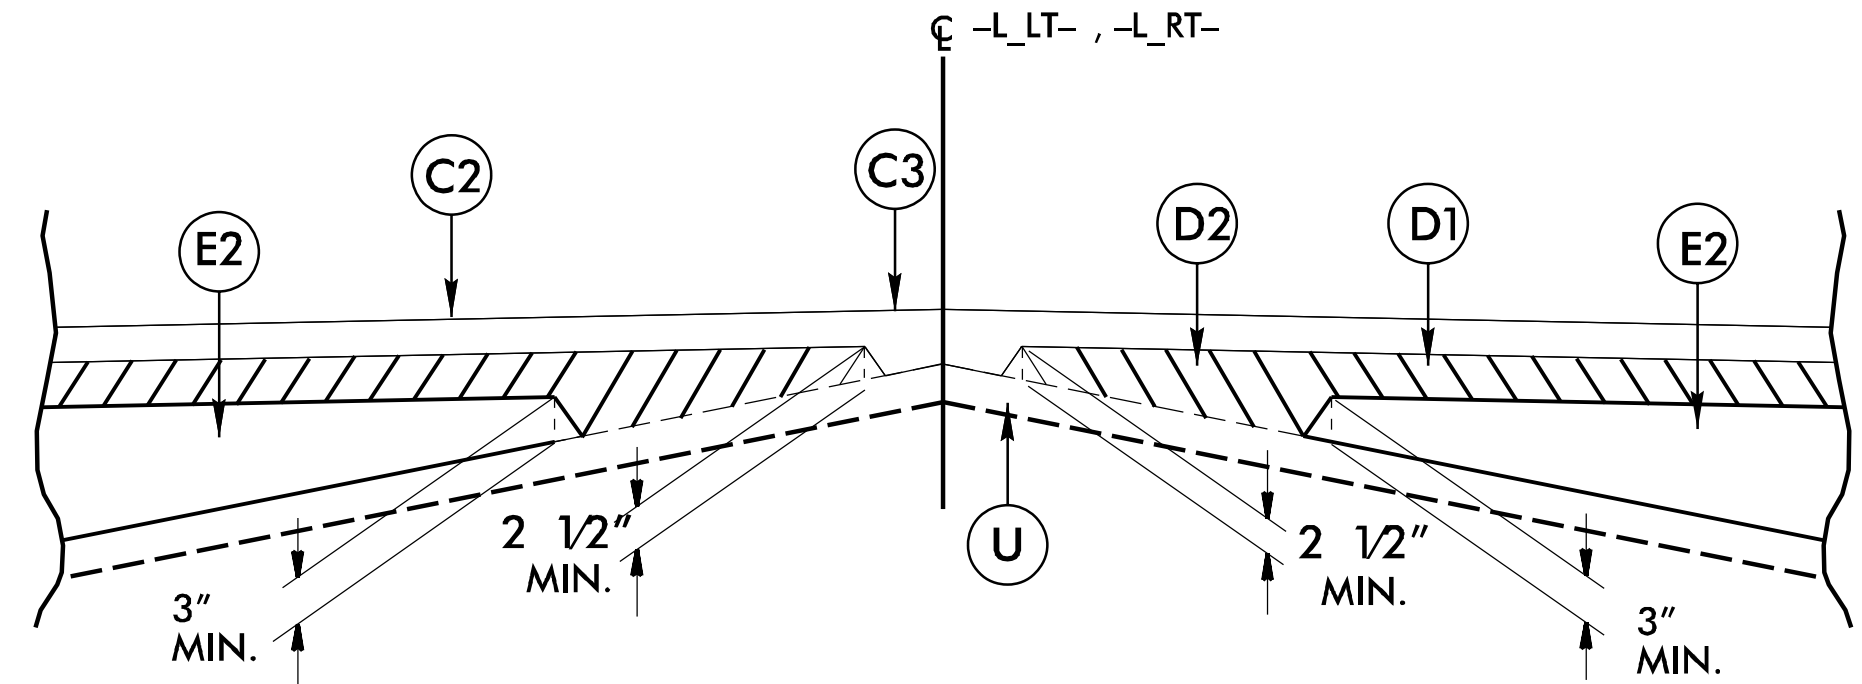
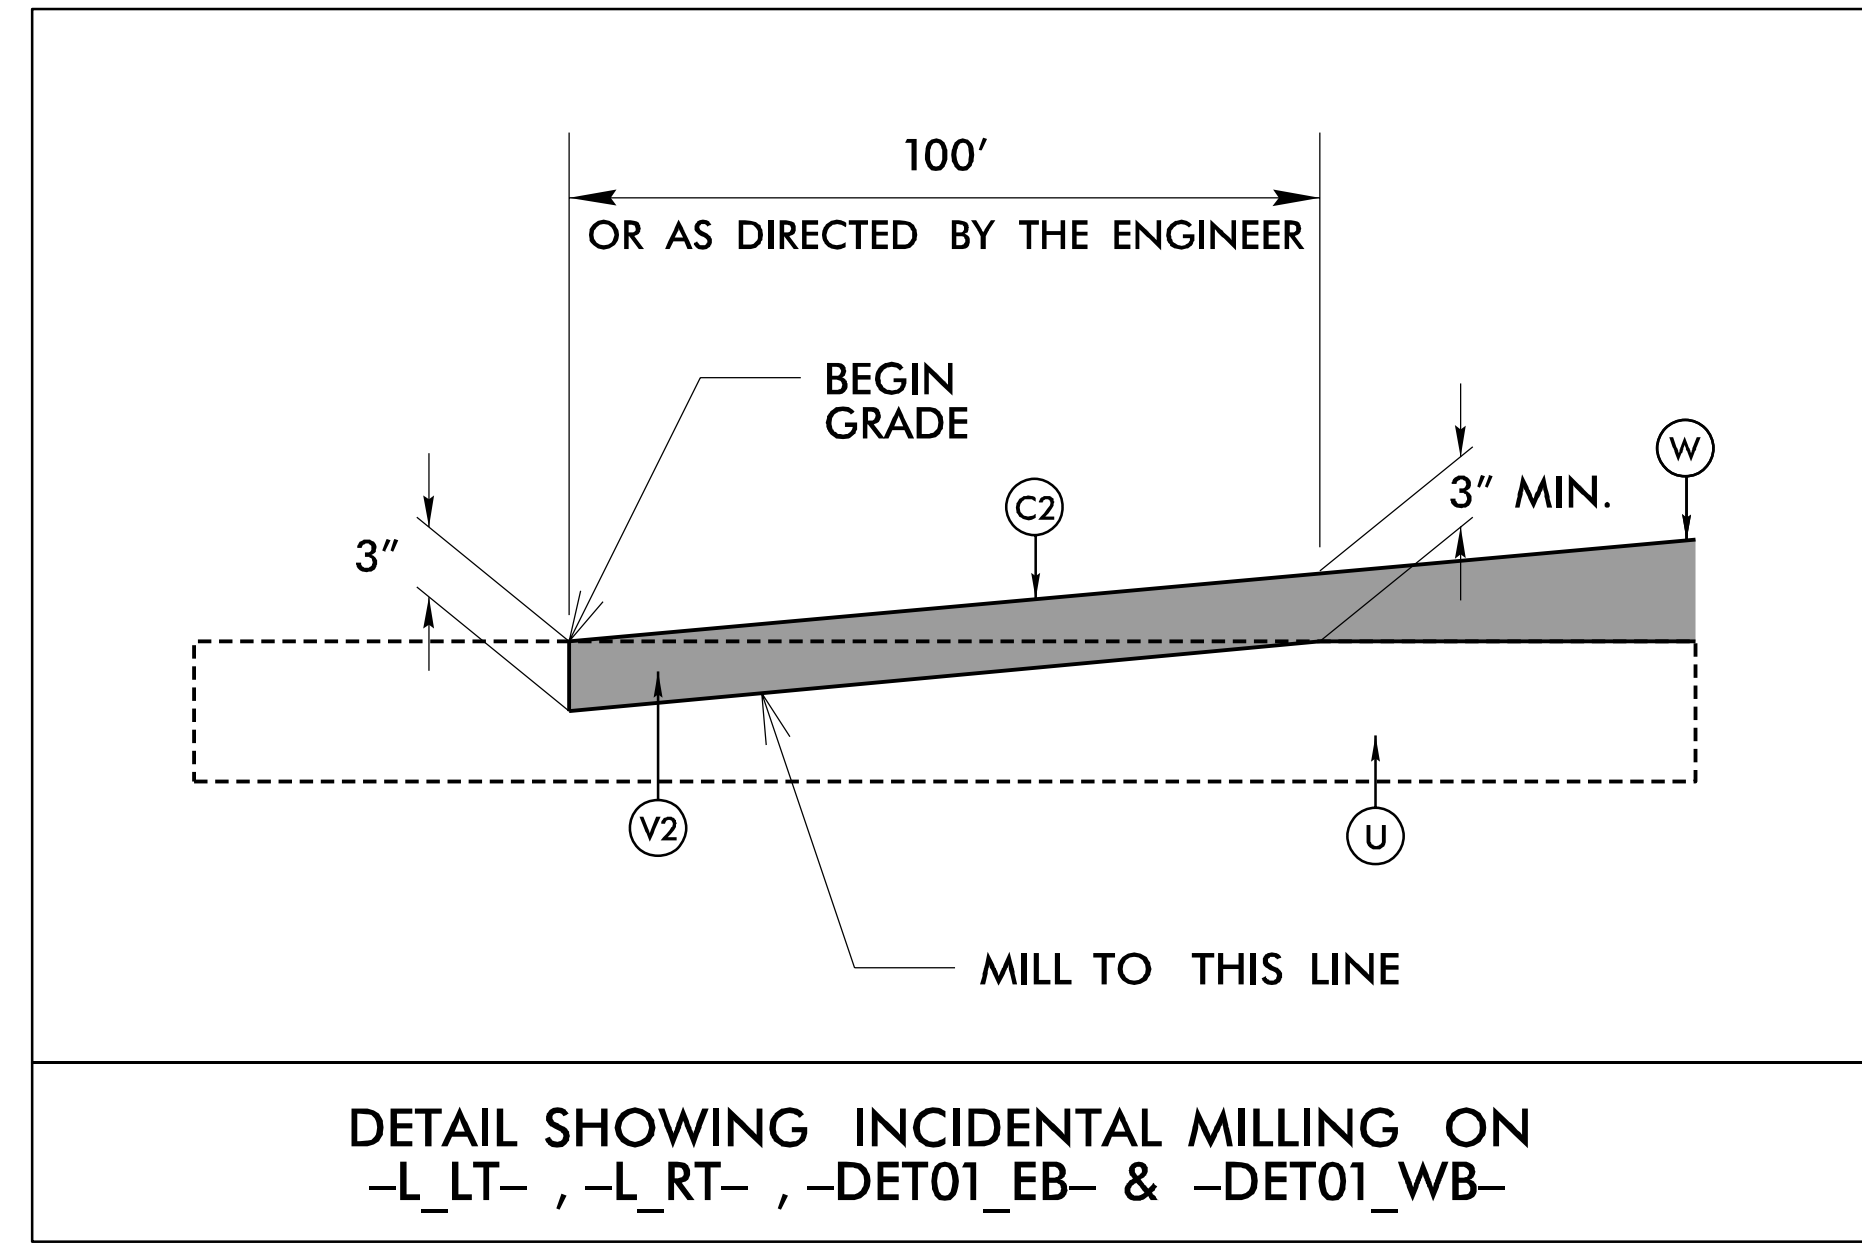


FINAL PAVEMENT SCHEDULE	
B1	PROP. APPROX 0.75" OPEN-GRADED ASPHALT FRICTION COURSE, TYPE FC-1 MODIFIED, AT AN AVERAGE RATE OF 90 LBS. PER SQ. YD.
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1 1/2" IN DEPTH OR GREATER THAN 2" IN DEPTH.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 3" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
J1	PROP. 6" AGGREGATE BASE COURSE
K	PROP. 12" CLASS IV SUBGRADE STABILIZATION
N1	GEOTEXTILE FOR SUBGRADE STABILIZATION
R1	SHOULDER BERM GUTTER
R2	EXPRESSWAY GUTTER
R3	2'-6" CURB AND GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT
V1	1.5" MILLING
V2	INCIDENTAL MILLING
W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAIL)
Y	MILLED RUMBLE STRIPS


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

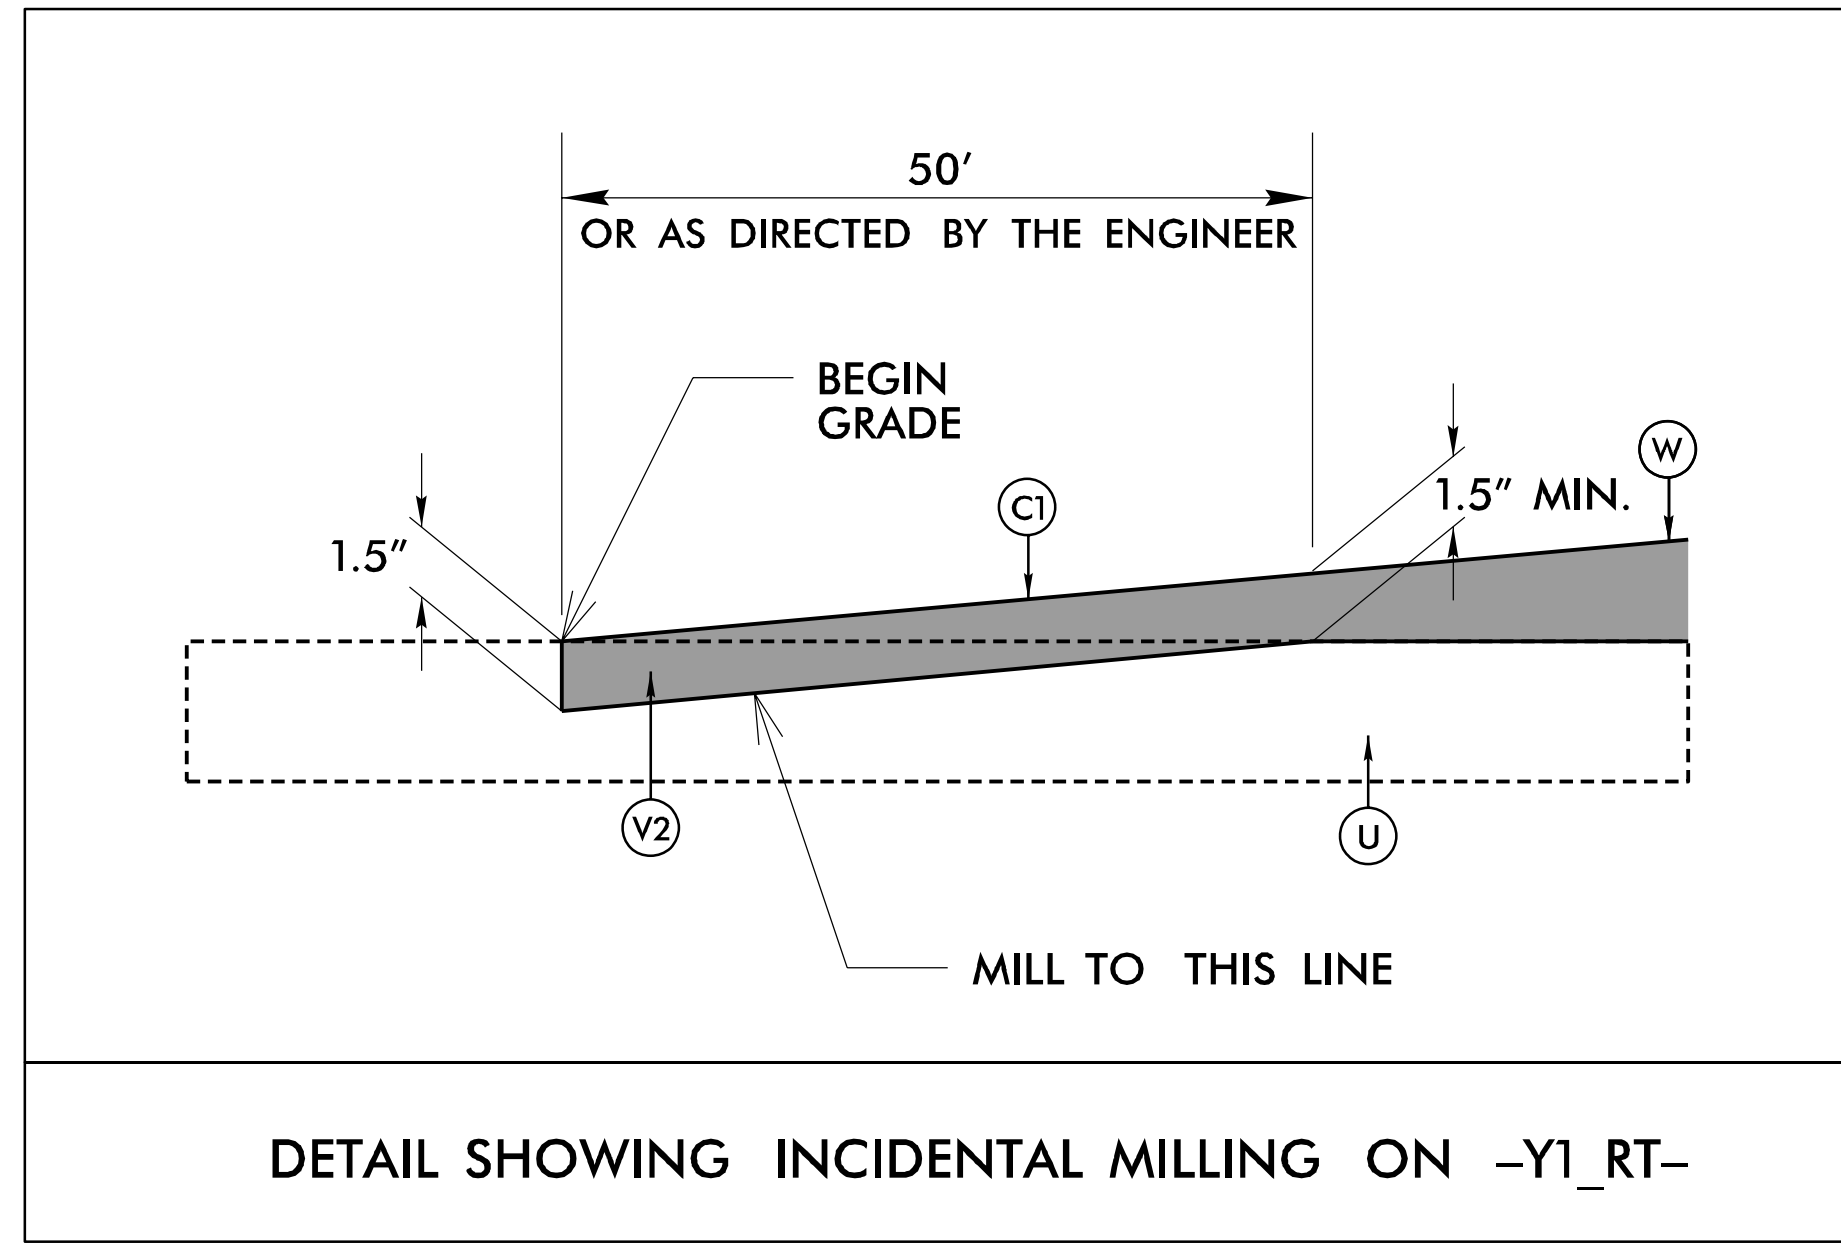

W1: DETAIL SHOWING METHOD OF WEDGING
USE THIS DETAIL IN CONJUNCTION WITH TYPICAL SECTION NO.1

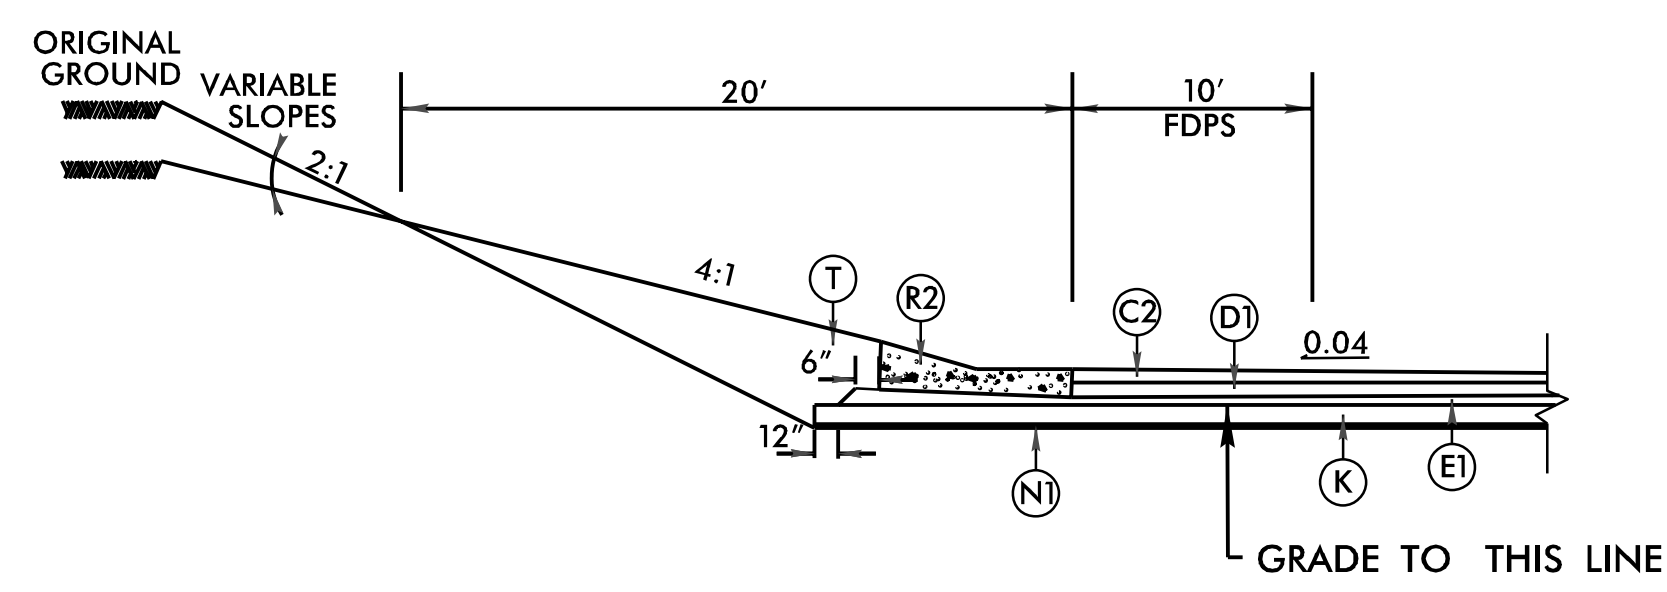

DETAIL SHOWING EXPRESSWAY GUTTER
-L_LT- STA. 6+89.67 TO STA. 17+00.00 (LT)

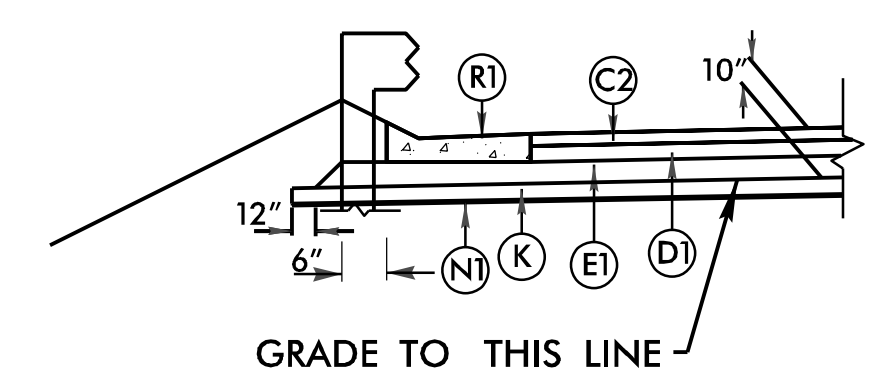

DETAIL SHOWING SHOULDER BERM GUTTER
-L_LT- STA. 18+93.00 TO STA. 23+39.99 (LT)
-L_RT- STA. 26+26.19 TO STA. 28+12.00 (LT)
-L_RT- STA. 16+93.00 TO STA. 18+70.52 (LT)
-L_RT- STA. 21+13.00 TO STA. 23+01.38 (RT)
-L_RT- STA. 25+56.96 TO STA. 39+23.44 (RT)
-L_LT- STA. 32+63.09 TO STA. 35+65.93 (LT)
-L_LT- STA. 33+71.86 TO STA. 40+49.18 (RT)
-Y1_RT- STA. 16+83.20 TO STA. 20+70.94 (LT)

B-3186 / B-5898
2A-1

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
HAYWOOD COUNTY

ROADWAY DESIGN UNIT
ROADWAY DESIGN ENGINEER

SEAL
0249634
11/7/2023

PAVEMENT DESIGN ENGINEER

SEAL
0249664
11/7/2023

PREPARED BY
AECOM
NC FIRM LICENSE No: F-0342
5438 Wade Park Boulevard, Suite 200
Raleigh, NC 27603
(919) 884-6200 (FAX) 884-6259 (CELL)

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

REVISIONS