


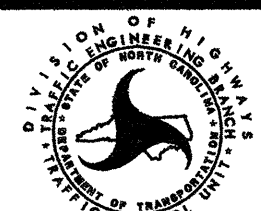
TEMP. PAV'T MARKING SCHEDULE

SYMBOL	DESCRIPTION	BREAKDOWN	PAY ITEM
PAVEMENT MARKING LINES			
PA	WHITE EDGELINE		PAINT (4")
PC	10 ft. WHITE SKIP		
PD	2 ft. WHITE MINISKIP		
PE	WHITE SOLID LANE LINE		
PF	10 ft. YELLOW SKIP		
PH	YELLOW SINGLE CENTER LINE		
PI	YELLOW DOUBLE CENTER LINE		
PR	WHITE GORELINE		PAINT (8")
P4	WHITE STOPBAR		PAINT (24")
PAVEMENT MARKING SYMBOLS			
QA	LEFT TURN ARROW		THERMOPLASTIC THICK SYMBOL (90 mils)
QB	RIGHT TURN ARROW		
QC	STRAIGHT ARROW		
QE	COMBO STRAIGHT / RIGHT TURN ARROW		
PAVEMENT MARKERS			
MH	YELLOW AND YELLOW		TEMPORARY RAISED
MI	CRYSTAL AND RED		

FINAL PAV'T MARKING SCHEDULE

SYMBOL	DESCRIPTION	BREAKDOWN	PAY ITEM
PAVEMENT MARKING LINES			
TA	WHITE EDGELINE		THERMOPLASTIC (4", 90mils)
TB	YELLOW EDGELINE		
TC	10 ft. WHITE SKIP		THERMOPLASTIC (4", 120mils)
TD	2 ft. WHITE MINISKIP		
TE	WHITE SOLID LANE LINE		
TF	10 ft. YELLOW SKIP		
TH	YELLOW SINGLE CENTER LINE		
TI	YELLOW DOUBLE CENTER LINE		
TP	WHITE GORELINE		THERMOPLASTIC (8", 90mils)
TQ	WHITE DIAGONAL		
TT	YELLOW DIAGONAL		
TV	WHITE CROSSWALK LINE		THERMOPLASTIC (8", 120mils)
T2	WHITE STOPBAR		THERMOPLASTIC (24", 120mils)
PAVEMENT MARKING SYMBOLS			
UA	LEFT TURN ARROW		THERMOPLASTIC THICK SYMBOL (90 mils)
UB	RIGHT TURN ARROW		
UC	STRAIGHT ARROW		
UE	COMBO STRAIGHT / RIGHT TURN ARROW		
PAVEMENT MARKERS			
MA	YELLOW AND YELLOW		PERMANENT RAISED
ME	YELLOW AND YELLOW		SNOWPLOWABLE RAISED
MF	CRYSTAL AND RED		

SEE ROADWAY STANDARD DRAWING NUMBERS 1205.01, 1205.02, 1205.04, 1205.05, 1205.06, 1205.07, 1205.08, 1205.09, 1250.01, 1251.01 AND 1253.01

APPROVED: <i>Michael T. Kelpa</i> DATE: 9-24-08	TEMP. / FINAL PAVEMENT MARKING SCHEDULES	
	SCALE: NONE	
	DATE: 9-08	
	DWG. BY: BLM	
	DESIGN BY: BLM	
REVIEWED BY: MTR	REVISIONS	

20


25

30

BEGIN PROJECT
 -L- STA. 16+00 ±
 TIE TO EXIST. MARKINGS

TIE TO EXIST. MARKINGS

-L- STA. 28+83 ±

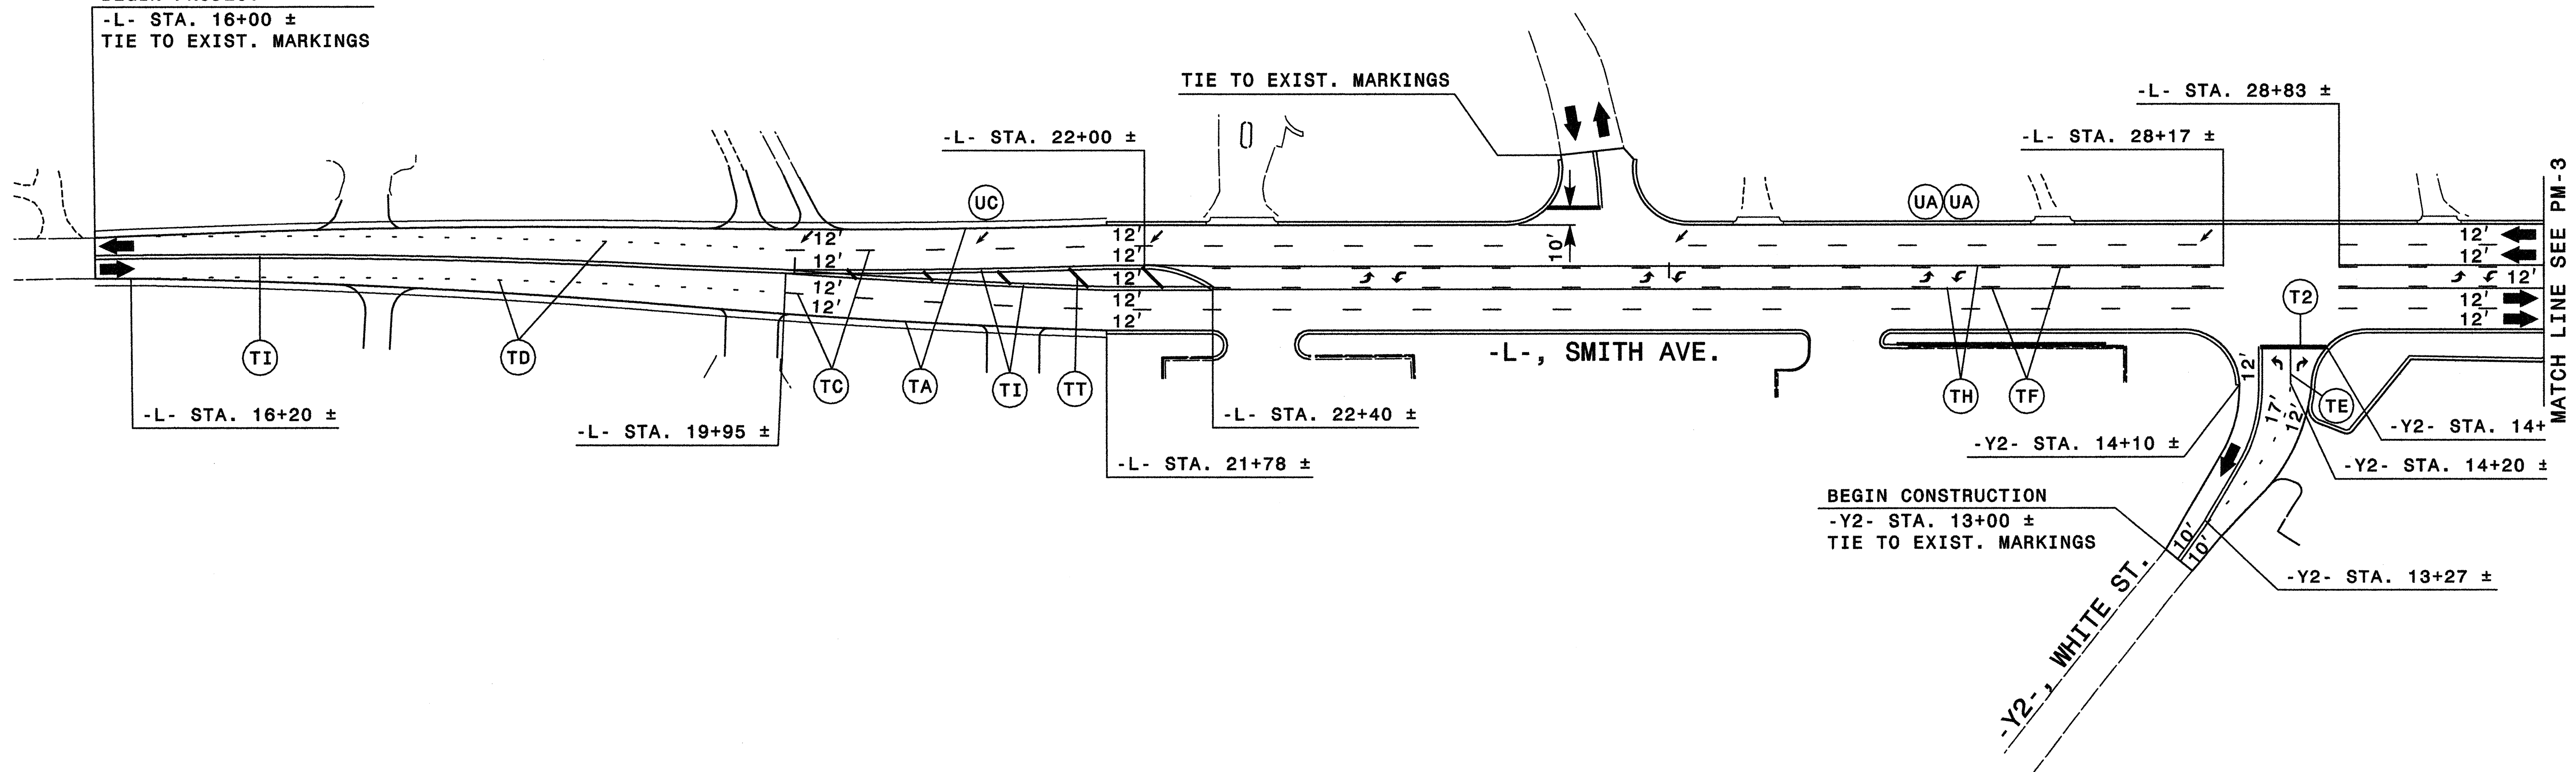

-L- STA. 16+20 ±

-L- STA. 19+95 ±

-L- STA. 22+00 ±

-L- STA. 22+40 ±

-L- STA. 21+78 ±

-L-, SMITH AVE.

-L- STA. 28+17 ±


-Y2- STA. 14+10 ±

-Y2- STA. 14+20 ±

-Y2- STA. 13+27 ±

BEGIN CONSTRUCTION
 -Y2- STA. 13+00 ±
 TIE TO EXIST. MARKINGS

MATCH LINE SEE PM-3

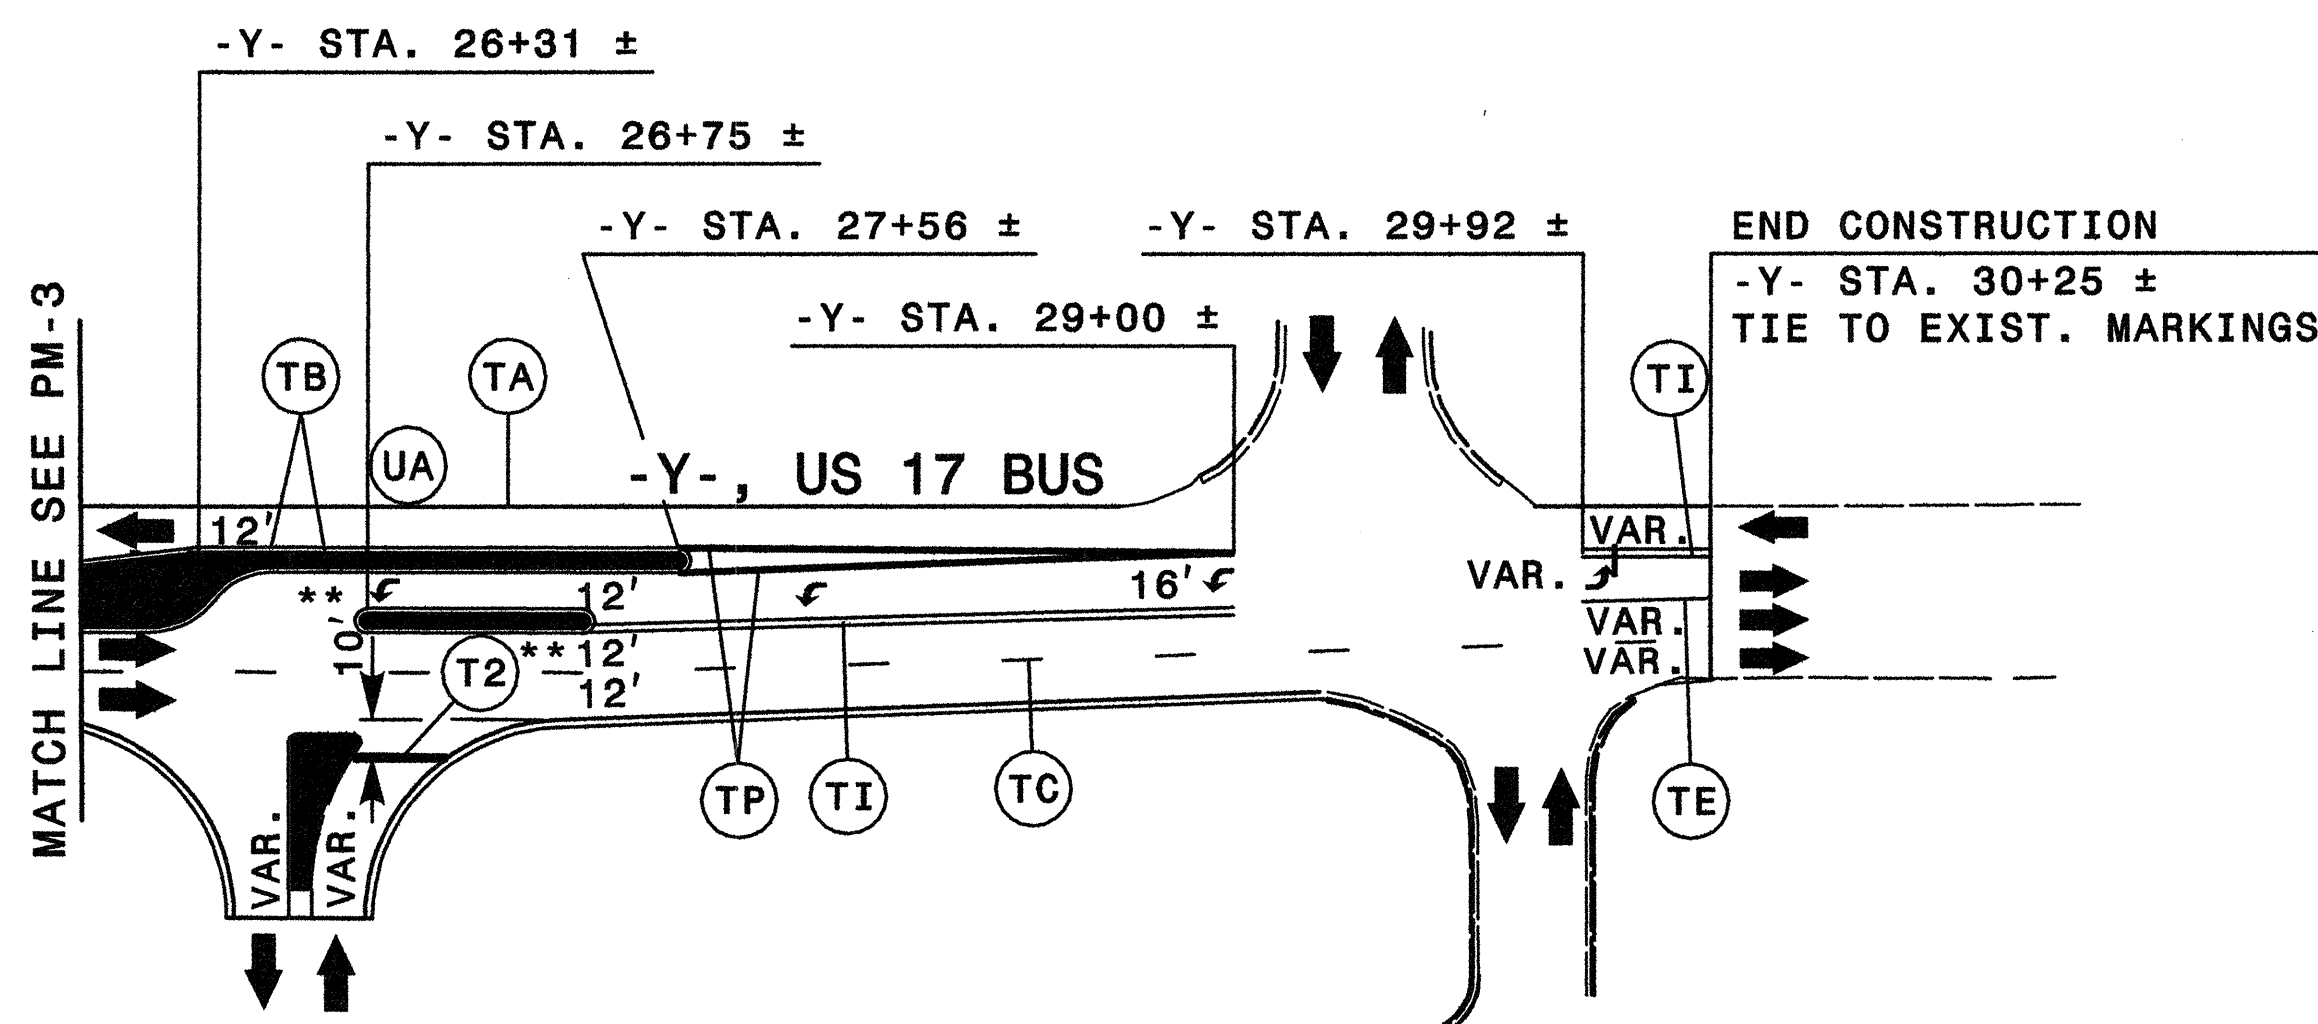

END CONSTRUCTION
 -Y- STA. 30+25 ±
 TIE TO EXIST. MARKINGS


MATCH LINE SEE PM-3

FINAL PAVEMENT MARKING SCHEDULE	
TA	- WHITE EDGELINE
TB	- YELLOW EDGELINE
TC	- 10ft WHITE SKIP
TD	- 2ft WHITE MINISKIP
TE	- WHITE SOLID LANE LINE
TF	- 10ft YELLOW SKIP
TH	- YELLOW SINGLE CENTER LINE
TI	- YELLOW DOUBLE CENTER LINE
TP	- WHITE GORELINE
TT	- YELLOW DIAGONAL
T2	- WHITE STOPBAR
UA	- LEFT TURN ARROW
UC	- STRAIGHT ARROW

** - PLACE PERMANENT RAISED PAVEMENT MARKERS (YELLOW/YELLOW) ON/AROUND THE MONOLITHIC ISLAND ENDS AT LOCATIONS DIRECTED BY THE ENGINEER.

NOTES:
 -SEE SHEET PM-1, FOR FINAL PAVEMENT MARKING SCHEDULE.
 -PAVEMENT MARKINGS AND SYMBOLS ARE TO BE MARKED ACCORDING TO ROADWAY STANDARD DRAWINGS UNLESS OTHERWISE NOTED IN THE PLANS.
 -PAVEMENT MARKERS ARE TO BE SPACED ACCORDING TO THE ROADWAY STANDARD DRAWINGS.

APPROVED: *Michael T. Riera* DATE: 9-24-08

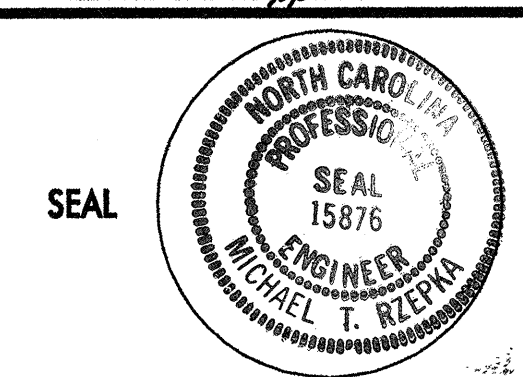


FINAL PAVEMENT MARKING PLAN

SCALE:	NONE		<table border="1"> <thead> <tr> <th colspan="2">REVISIONS</th> </tr> </thead> <tbody> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </tbody> </table>	REVISIONS							
REVISIONS											
DATE:	9-08										
DWG. BY:	BLM										
DESIGN BY:	BLM										
REVIEWED BY:	MTR	<table border="1"> <tr> <td> </td> <td> </td> </tr> </table>									

FINAL PAVEMENT MARKING SCHEDULE

- TA - WHITE EDGELINE
- TB - YELLOW EDGELINE
- TC - 10ft WHITE SKIP
- TD - 2ft WHITE MINISKIP
- TE - WHITE SOLID LANE LINE
- TF - 10ft YELLOW SKIP
- TH - YELLOW SINGLE CENTER LINE
- TI - YELLOW DOUBLE CENTER LINE
- TP - WHITE GORELINE
- TQ - WHITE DIAGONAL
- TV - WHITE CROSSWALK LINE
- T2 - WHITE STOPBAR
- UA - LEFT TURN ARROW
- UB - RIGHT TURN ARROW
- UC - STRAIGHT ARROW
- UE - COMBO STRAIGHT / RIGHT TURN ARROW

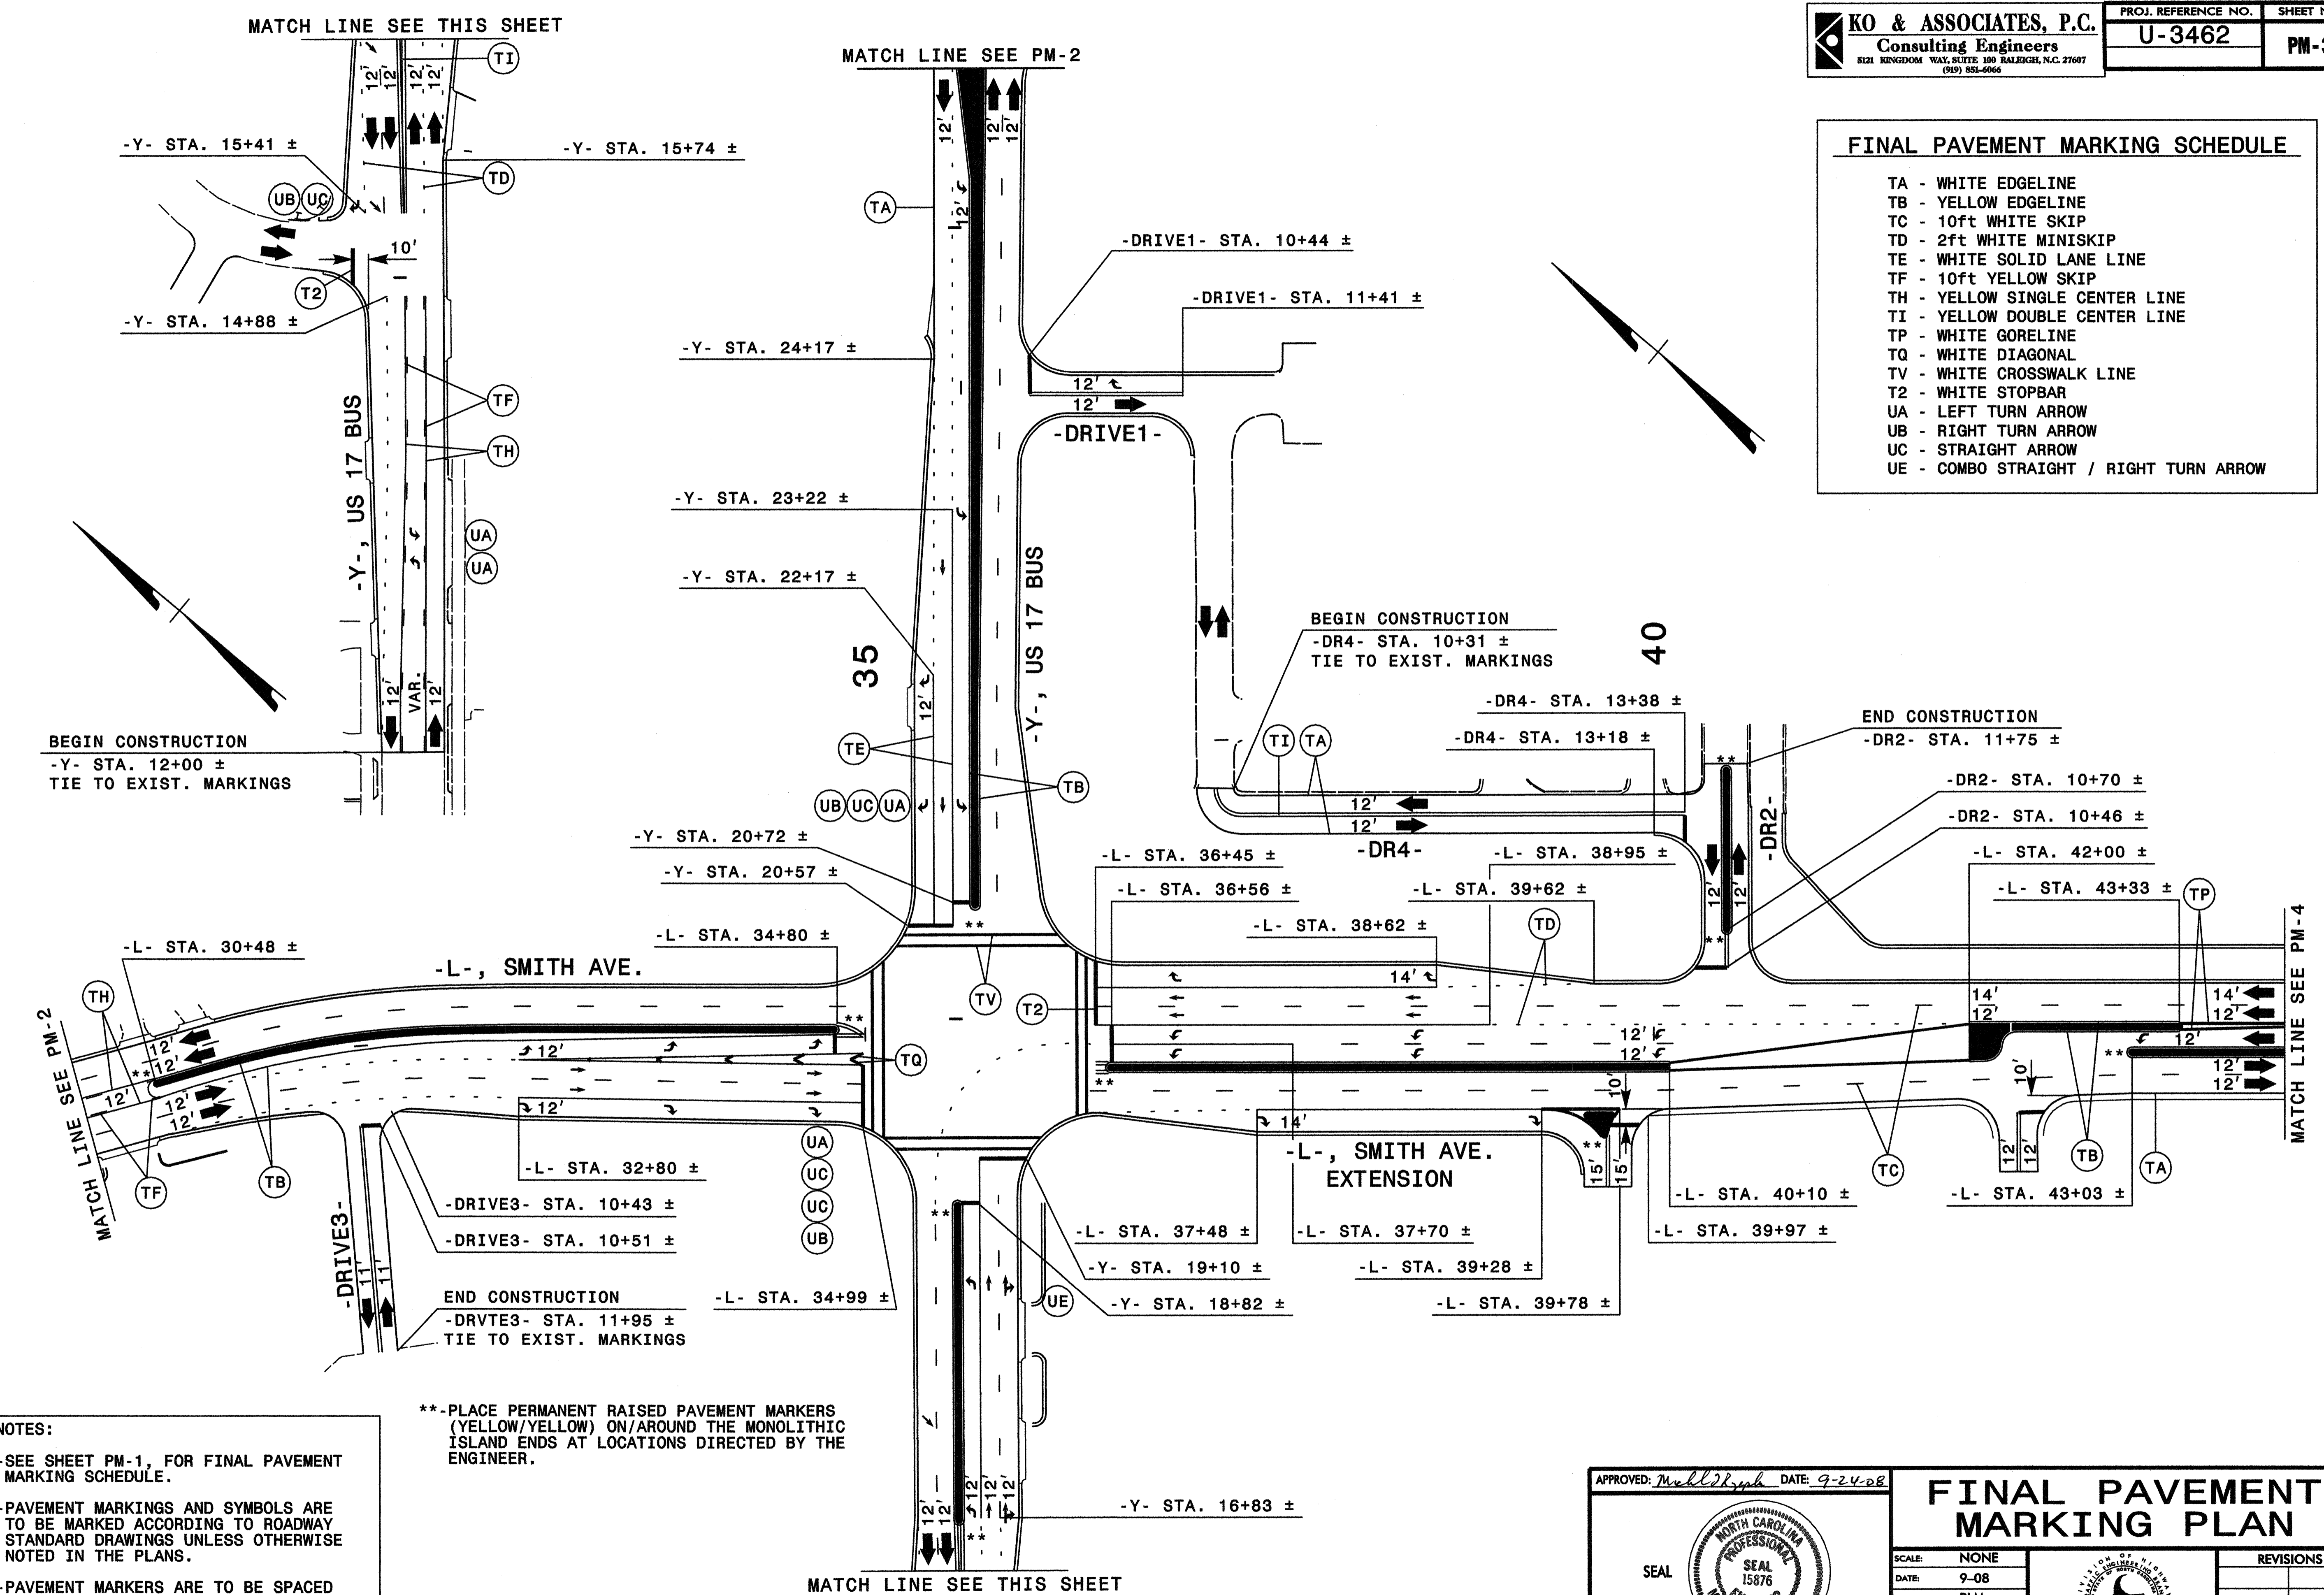

NOTES:

- SEE SHEET PM-1, FOR FINAL PAVEMENT MARKING SCHEDULE.
- PAVEMENT MARKINGS AND SYMBOLS ARE TO BE MARKED ACCORDING TO ROADWAY STANDARD DRAWINGS UNLESS OTHERWISE NOTED IN THE PLANS.
- PAVEMENT MARKERS ARE TO BE SPACED ACCORDING TO THE ROADWAY STANDARD DRAWINGS.

** - PLACE PERMANENT RAISED PAVEMENT MARKERS (YELLOW/YELLOW) ON/AROUND THE MONOLITHIC ISLAND ENDS AT LOCATIONS DIRECTED BY THE ENGINEER.

APPROVED: *Michael T. Rzepka* DATE: 9-24-08

FINAL PAVEMENT MARKING PLAN


SCALE: NONE
 DATE: 9-08
 DWG. BY: BLM
 DESIGN BY: BLM
 REVIEWED BY: MTR

SEAL:

REVISIONS	
NO.	DESCRIPTION

FINAL PAVEMENT MARKING SCHEDULE


- TA - WHITE EDGELINE
- TB - YELLOW EDGELINE
- TC - 10ft WHITE SKIP
- TD - 2ft WHITE MINISKIP
- TI - YELLOW DOUBLE CENTER LINE
- TP - WHITE GORELINE
- T2 - WHITE STOPBAR
- UA - LEFT TURN ARROW
- UC - STRAIGHT ARROW
- UE - COMBO STRAIGHT / RIGHT TURN ARROW

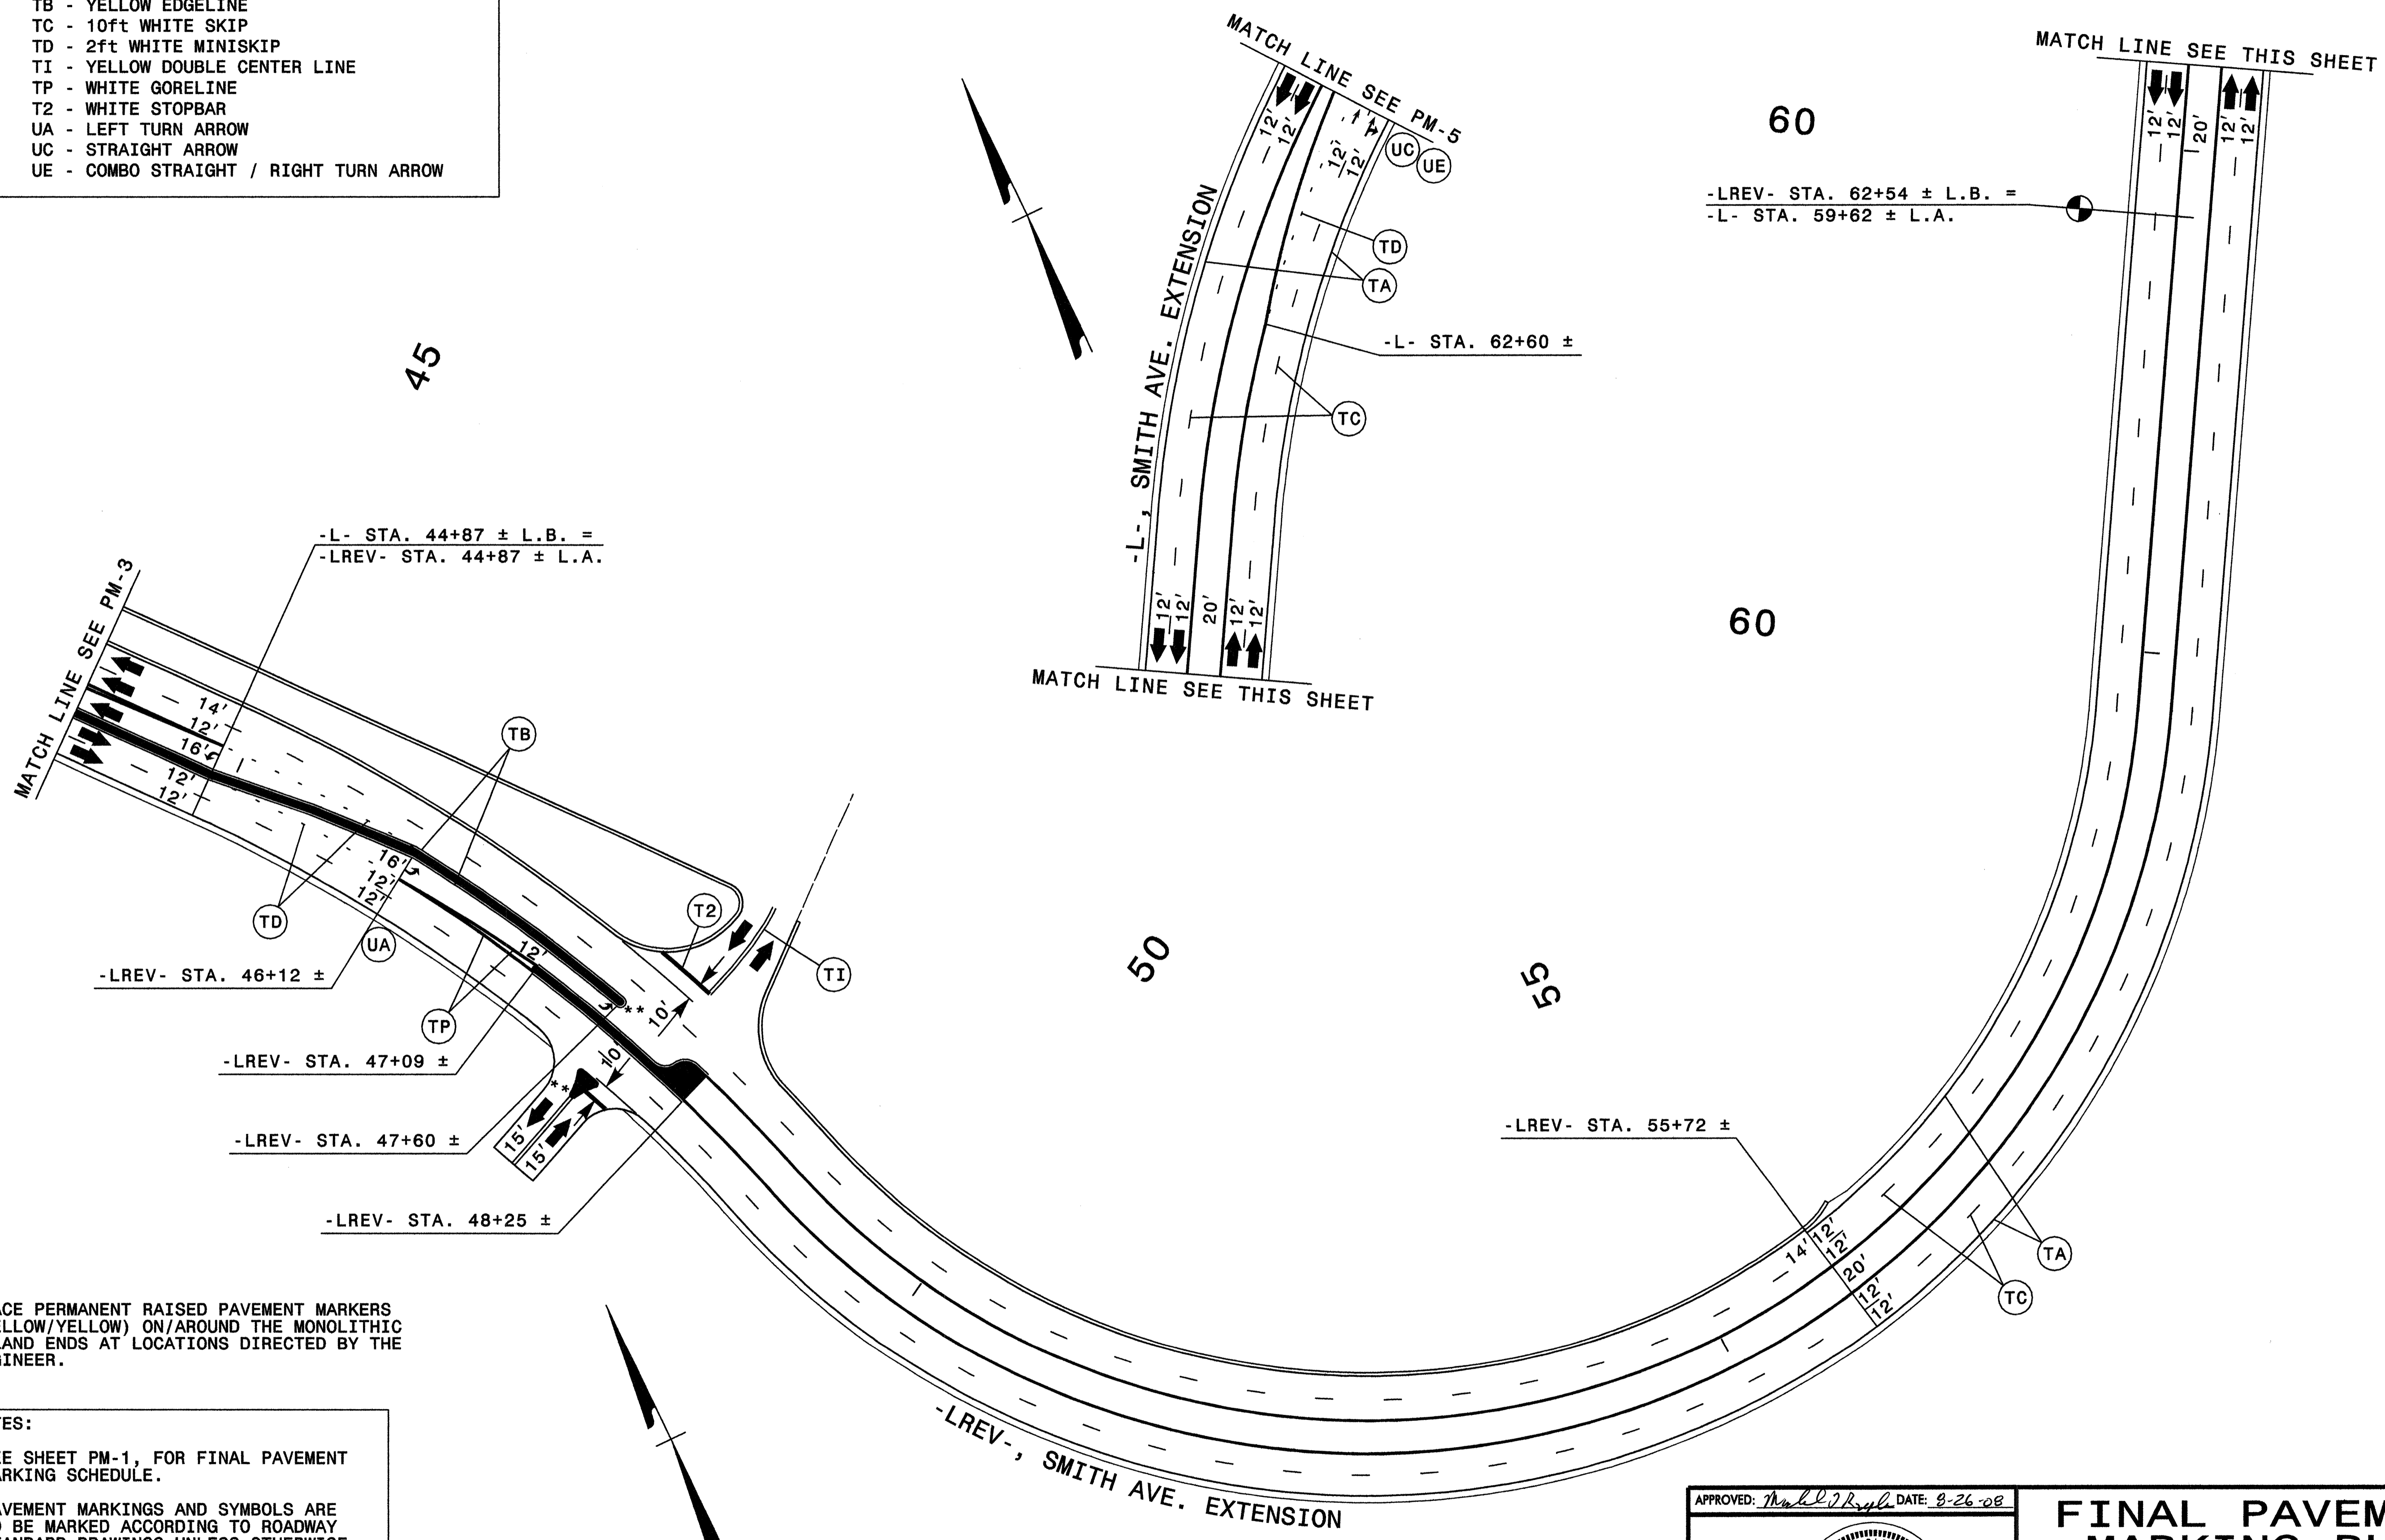

** - PLACE PERMANENT RAISED PAVEMENT MARKERS (YELLOW/YELLOW) ON/AROUND THE MONOLITHIC ISLAND ENDS AT LOCATIONS DIRECTED BY THE ENGINEER.


NOTES:
 -SEE SHEET PM-1, FOR FINAL PAVEMENT MARKING SCHEDULE.
 -PAVEMENT MARKINGS AND SYMBOLS ARE TO BE MARKED ACCORDING TO ROADWAY STANDARD DRAWINGS UNLESS OTHERWISE NOTED IN THE PLANS.
 -PAVEMENT MARKERS ARE TO BE SPACED ACCORDING TO THE ROADWAY STANDARD DRAWINGS.

APPROVED: *Michael T. Keppel* DATE: 8-26-08

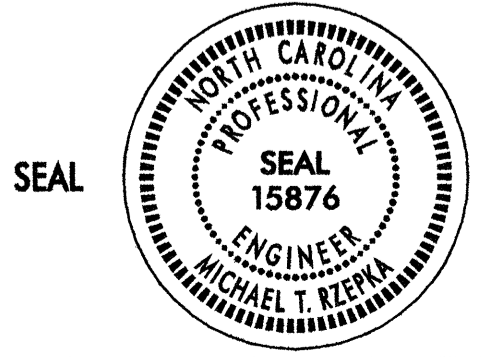

FINAL PAVEMENT MARKING PLAN

SCALE: NONE		REVISIONS
DATE: 8-08		
DWG. BY: BLM		
DESIGN BY: BLM		
REVIEWED BY: MTR		

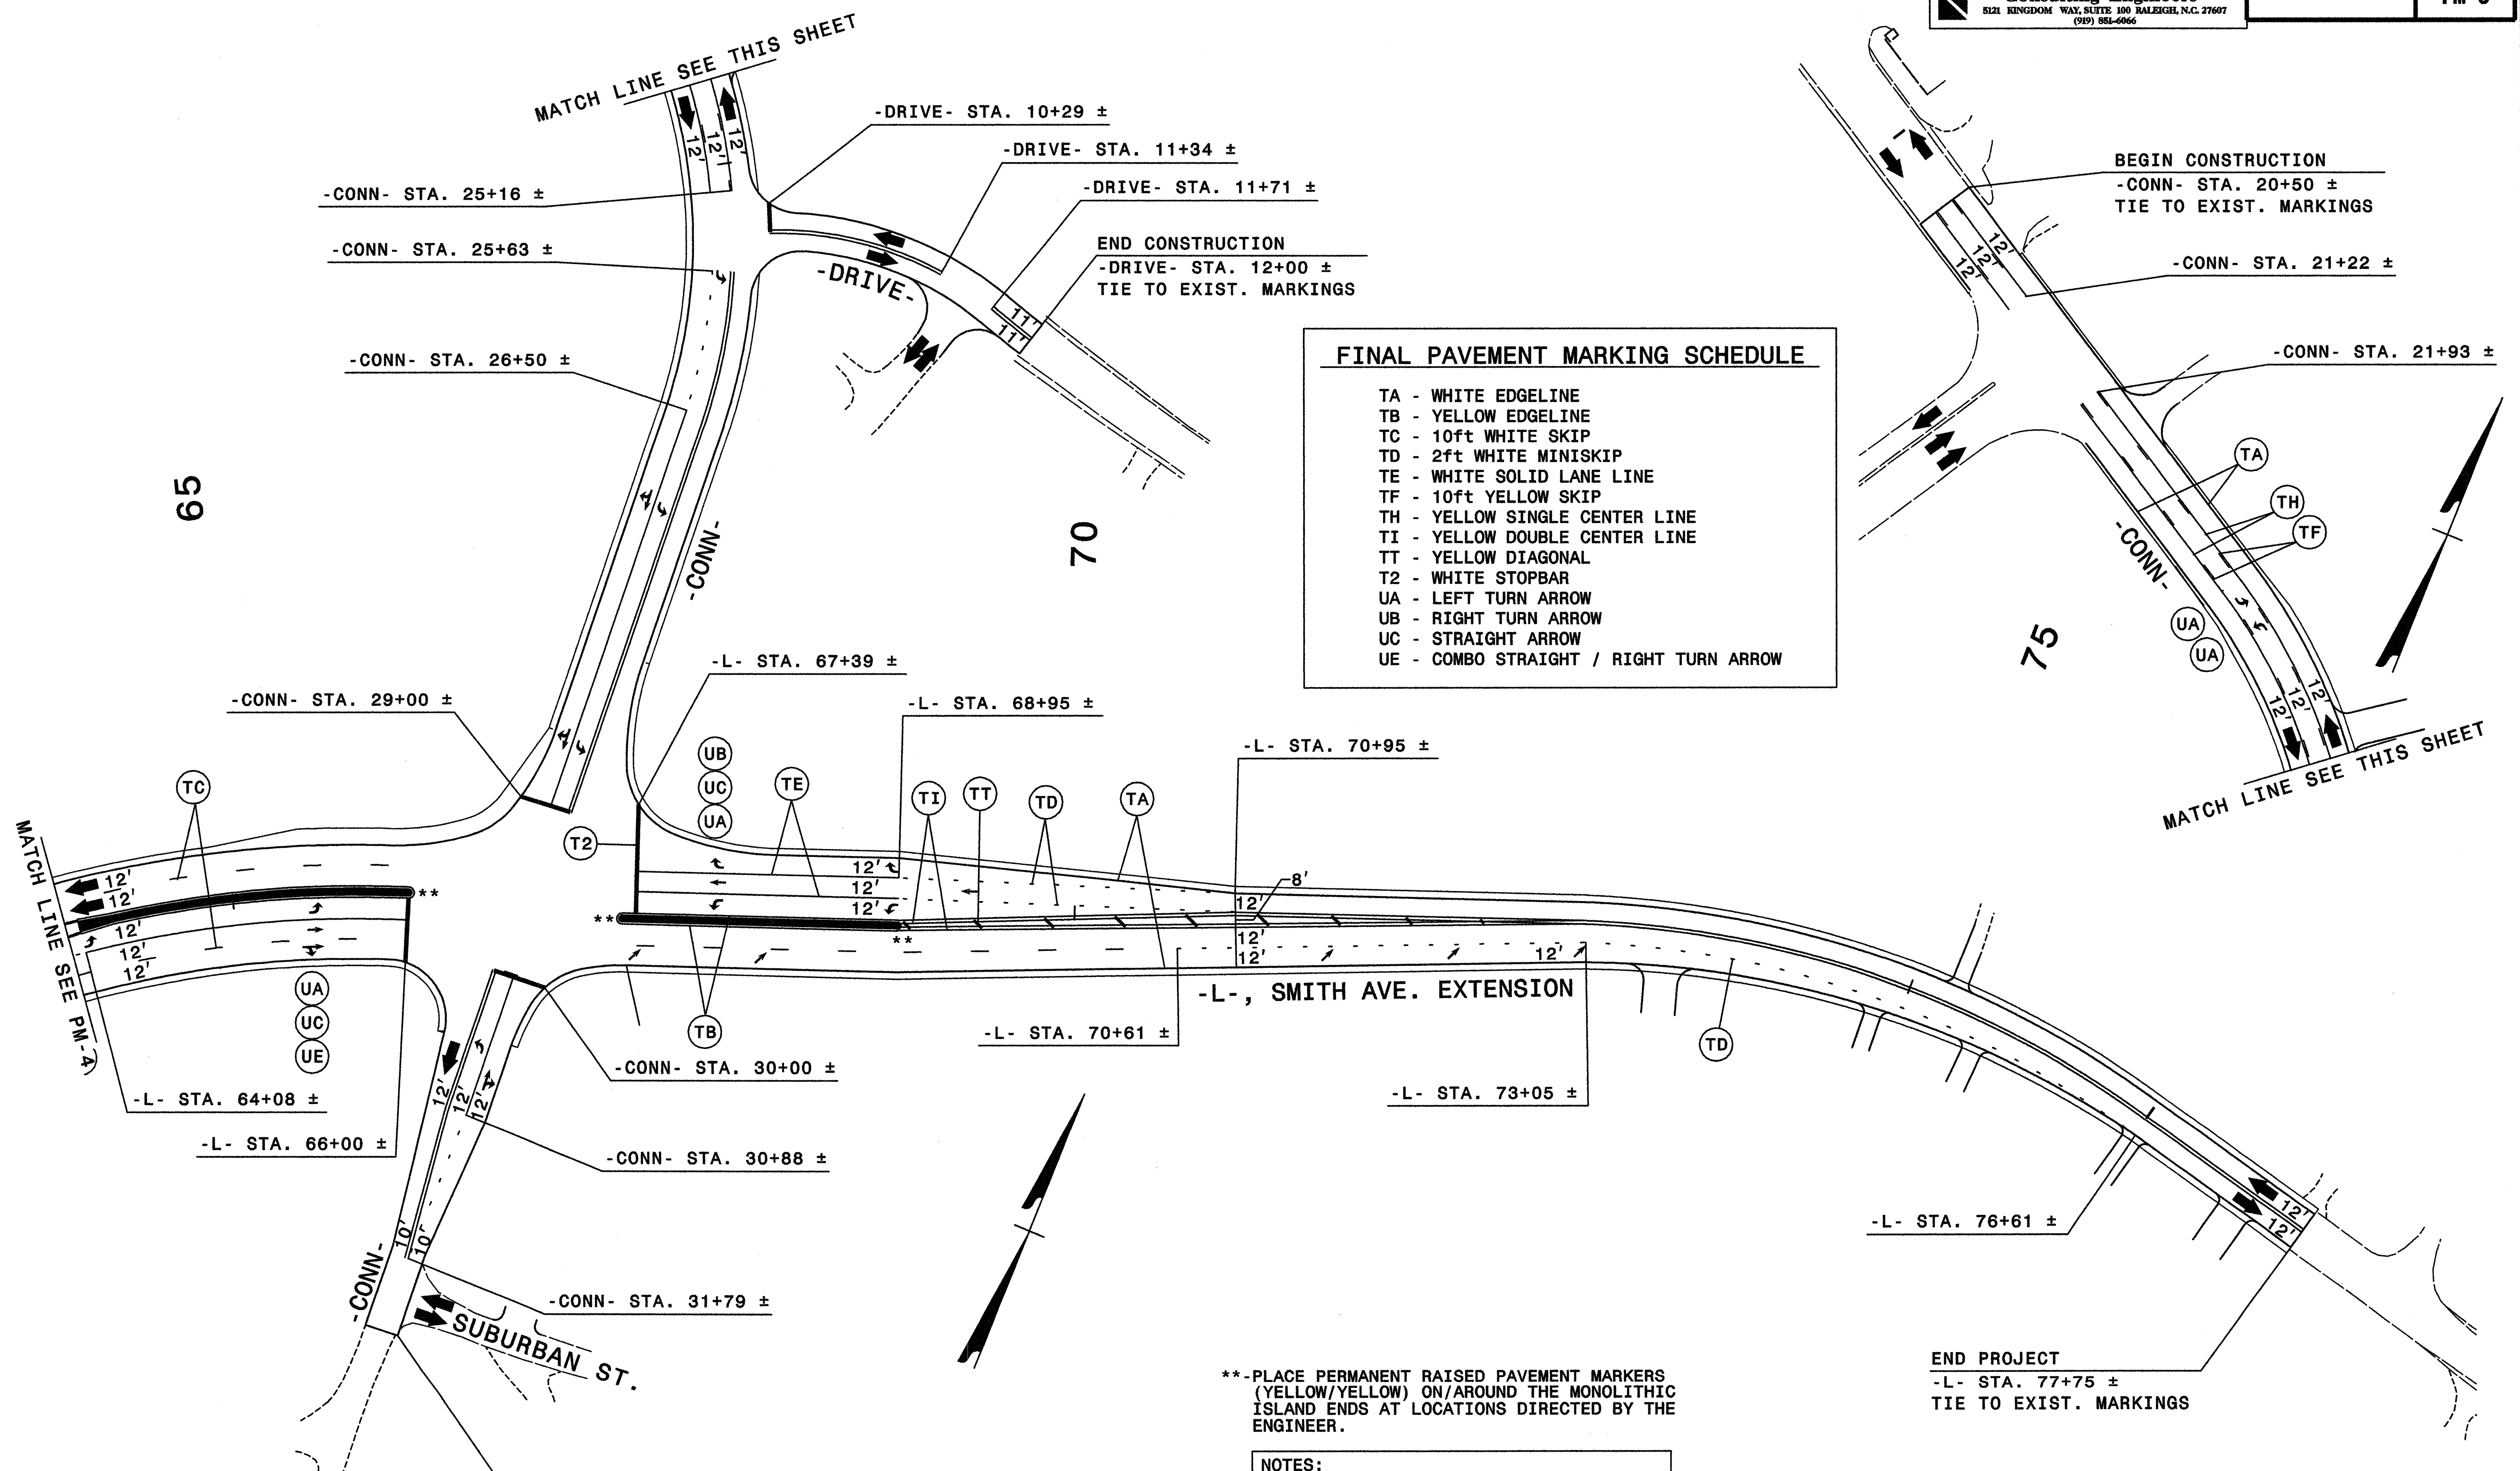

FINAL PAVEMENT MARKING SCHEDULE

TA	- WHITE EDGELINE
TB	- YELLOW EDGELINE
TC	- 10ft WHITE SKIP
TD	- 2ft WHITE MINISKIP
TE	- WHITE SOLID LANE LINE
TF	- 10ft YELLOW SKIP
TH	- YELLOW SINGLE CENTER LINE
TI	- YELLOW DOUBLE CENTER LINE
TT	- YELLOW DIAGONAL
T2	- WHITE STOPBAR
UA	- LEFT TURN ARROW
UB	- RIGHT TURN ARROW
UC	- STRAIGHT ARROW
UE	- COMBO STRAIGHT / RIGHT TURN ARROW

** - PLACE PERMANENT RAISED PAVEMENT MARKERS (YELLOW/YELLOW) ON/AROUND THE MONOLITHIC ISLAND ENDS AT LOCATIONS DIRECTED BY THE ENGINEER.


NOTES:

- SEE SHEET PM-1, FOR FINAL PAVEMENT MARKING SCHEDULE.
- PAVEMENT MARKINGS AND SYMBOLS ARE TO BE MARKED ACCORDING TO ROADWAY STANDARD DRAWINGS UNLESS OTHERWISE NOTED IN THE PLANS.
- PAVEMENT MARKERS ARE TO BE SPACED ACCORDING TO THE ROADWAY STANDARD DRAWINGS.

END CONSTRUCTION
 -CONN- STA. 32+25 ±
 TIE TO EXIST. MARKINGS

END PROJECT
 -L- STA. 77+75 ±
 TIE TO EXIST. MARKINGS

APPROVED: *Michael R. Riedel* DATE: 9-24-08

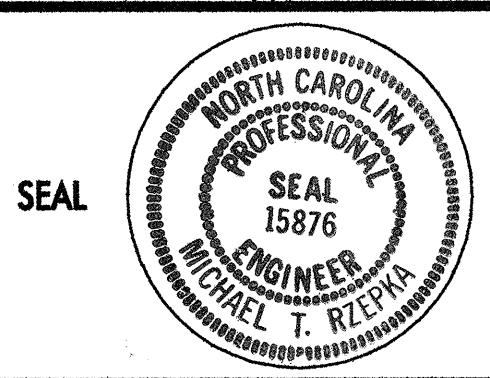

FINAL PAVEMENT MARKING PLAN

SCALE: NONE		<table border="1"> <tr><th colspan="2">REVISIONS</th></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </table>	REVISIONS							
REVISIONS										
DATE: 9-08										
DWG. BY: BLM										
DESIGN BY: BLM										
REVIEWED BY: MTR	<table border="1"> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </table>									