


NOTES:

1. CONTRACTOR IS RESPONSIBLE FOR FURNISHING ELEVATION DRAWINGS FOR ENGINEER'S APPROVAL.
2. PROVIDE A FIXED LADDER LEADING TO THE ACCESS PLATFORM FOR THE DMS AS INDICATED IN THE PROJECT SPECIAL PROVISIONS.
3. EQUIP THE LADDER WITH A SECURITY COVER (LADDER GUARD). START THE FIRST LADDER RUNG NO MORE THAN 18 INCHES ABOVE A CONCRETE LANDING PAD. DESIGN RUNGS ON 12 INCH CENTER-TO-CENTER TYPICAL SPACING.
4. INSTALL A CONCRETE LANDING PAD MEASURING A MINIMUM 4 INCHES DEEP, 24 INCHES WIDE, AND 36 INCHES LONG DIRECTLY BENEATH THE LADDER.
5. USE ACTUAL DIMENSIONS AND WEIGHT OF THE DMS TO COMPLETE THE DESIGN OF THE DMS STRUCTURE.
6. FIELD VERIFY ALL FOOTING ELEVATIONS AND GROUND SLOPES AT THE FOOTINGS USING THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES.
7. ENSURE THAT THE TOP OF THE FOOTING EXTENDS AT LEAST 6 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
8. DESIGN AND CONSTRUCT THE PEDESTAL STRUCTURES AND DMS ENCLOSURE TO WITHSTAND WIND VELOCITIES OF 120 MPH.
9. VERIFY ALL UNDERGROUND UTILITY LOCATIONS BEFORE BEGINNING ANY UNDERGROUND WORK. DO NOT DAMAGE ANY EXISTING UTILITIES OR NCDOT COMMUNICATIONS CABLE DURING CONSTRUCTION.
10. REFER TO THE PROJECT SPECIAL PROVISIONS FOR INFORMATION ABOUT THE MATERIALS NEEDED FOR THE CCTV EXTENSION ARM AND BANDING.

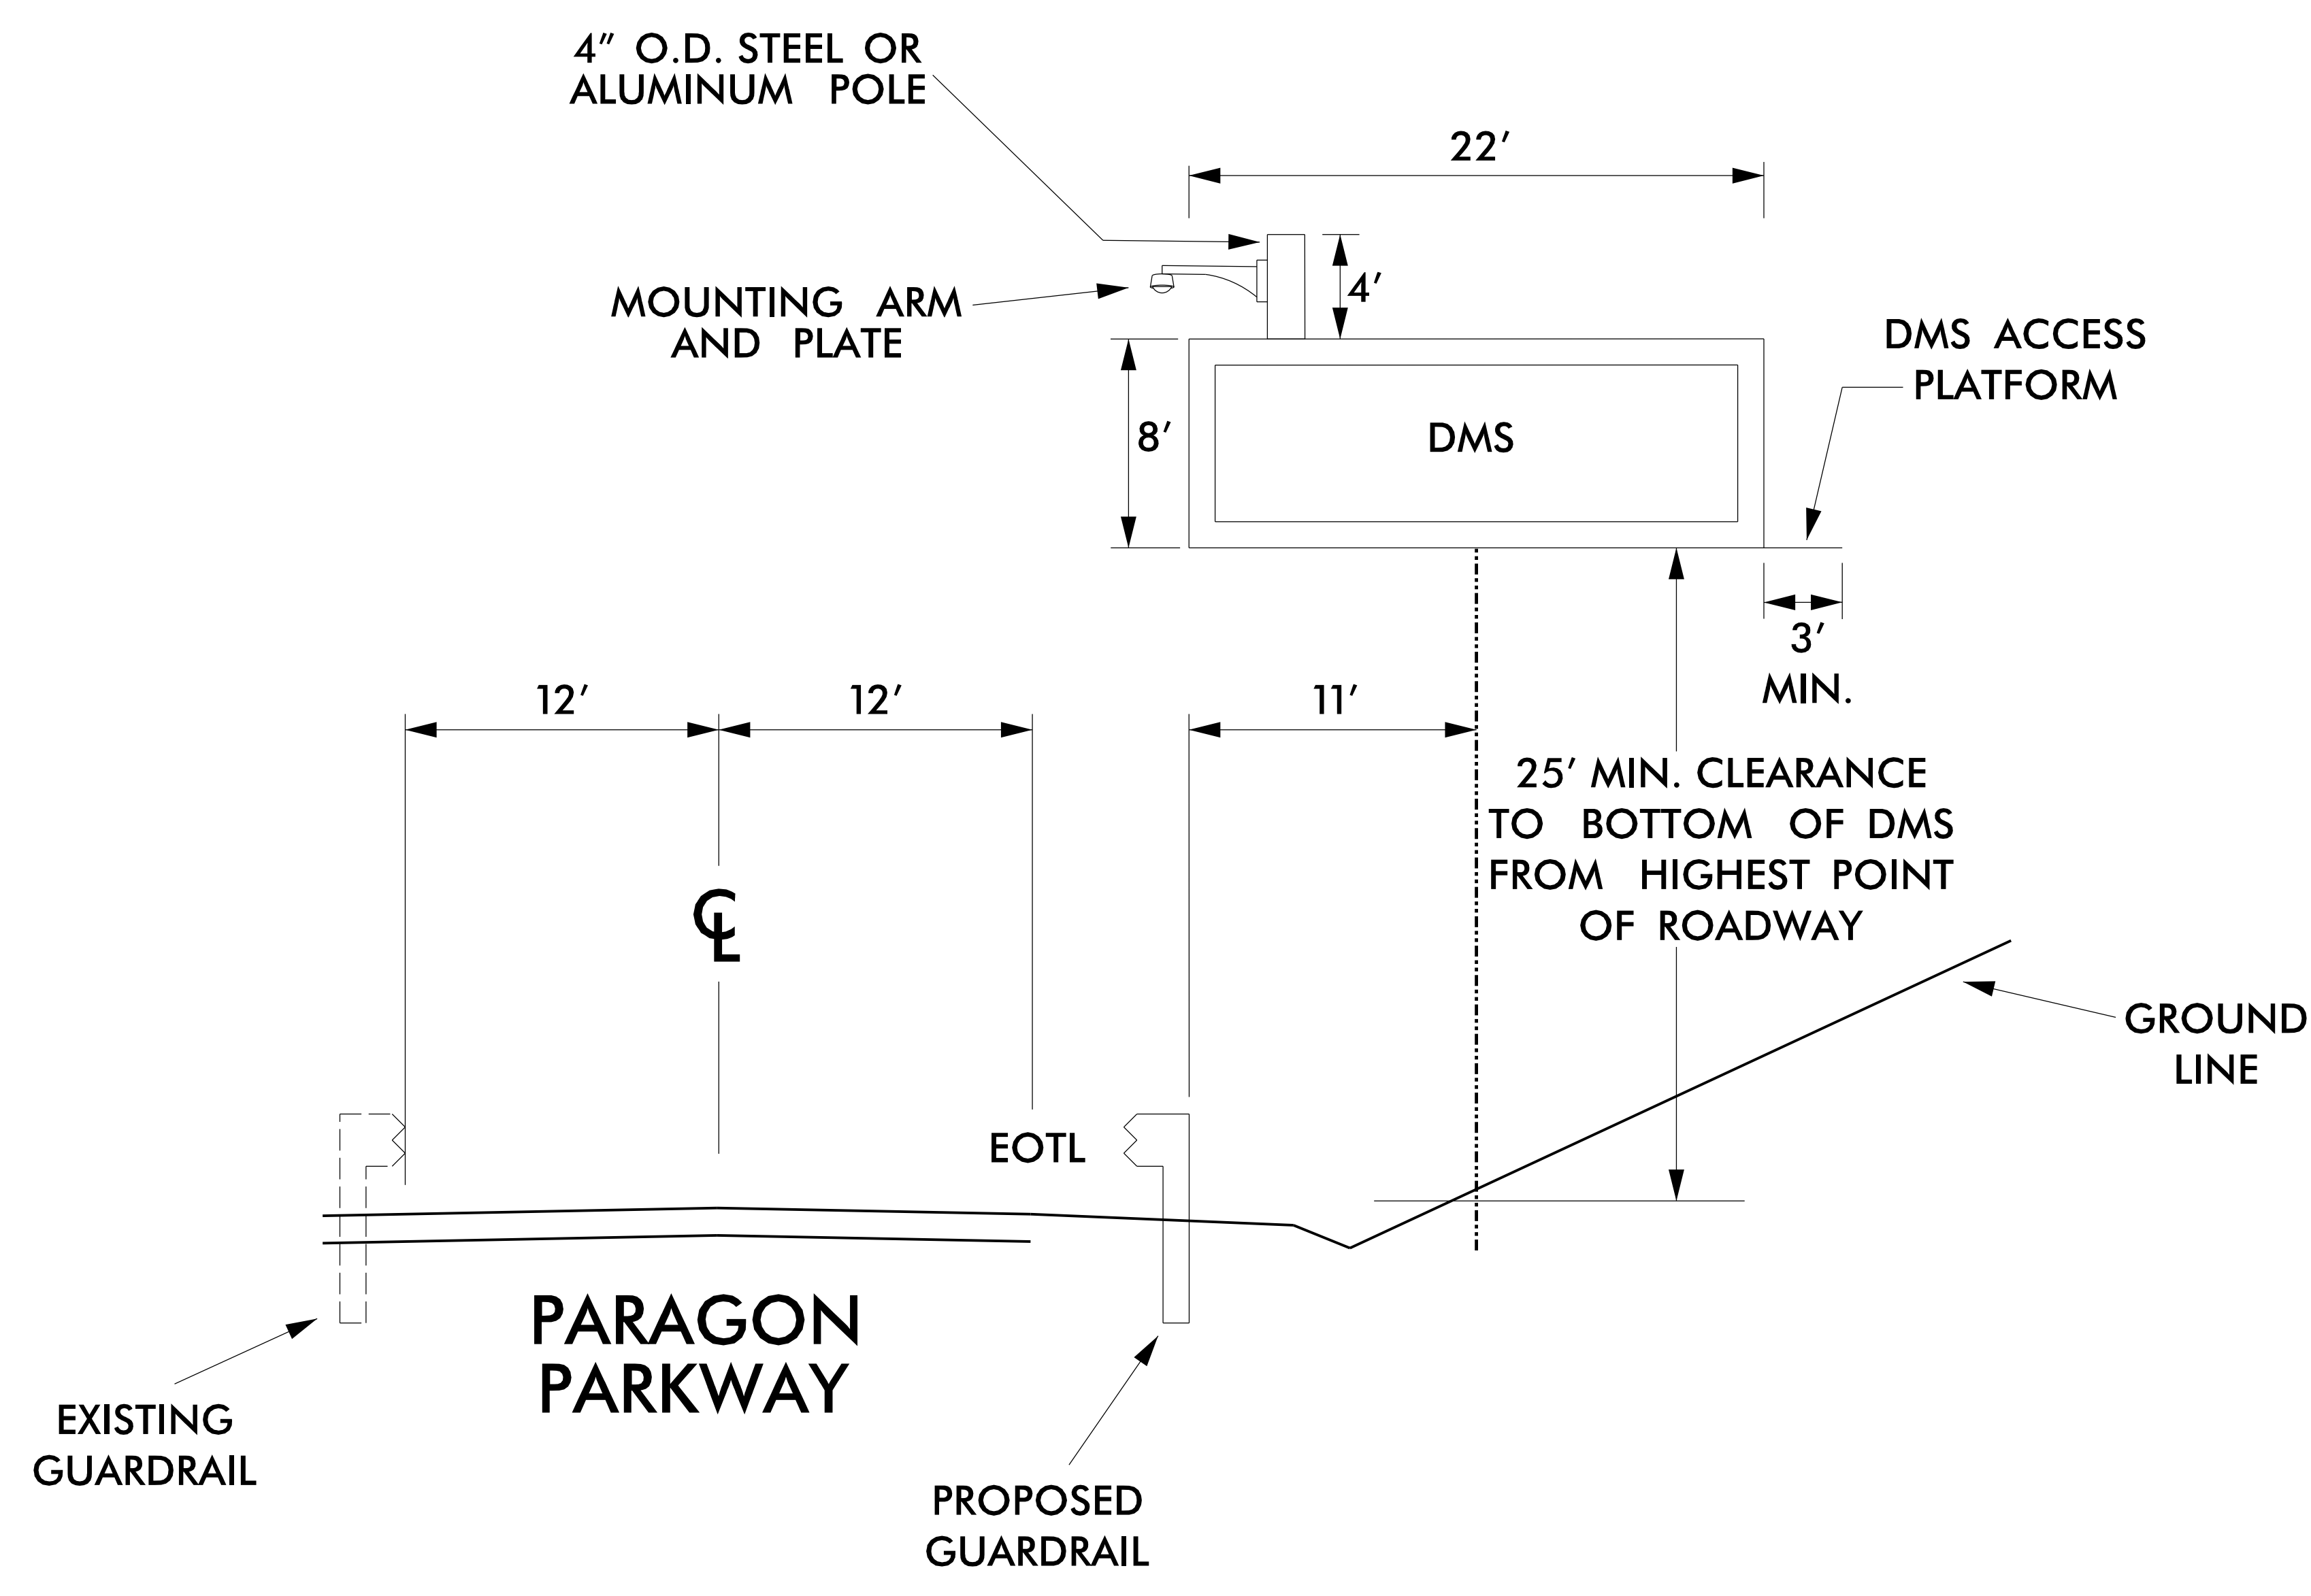

**619 Paragon Parkway at
Division 14 Maintenance Yard Entrance**

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

8/4/2023 8:41:11 AM p:\aecom\m-pw\ben\1\ey.com\AECOM\USA_North\Carolina\Documents\60670367-1\NCDOT_B5898_B3186\900-CAD_GIS\910-CAD\70-NCDOT_TIP\Inet\Inet\Transportation_Systems\B-5898-ITS_PSH26.dgn



	Prepared for the Offices of: Elevation View CCTV-2/DMS-1 Division 14 Haywood County Waynesville	
	PLAN DATE: August 2023 PREPARED BY: M. Cavanaugh	REVIEWED BY: R. Garrett REVIEWED BY:
SCALE 0 5 1" = 5'	REVISIONS INIT. DATE	DocuSigned by: Rochelle Garrett 8/4/2023 SIGNATURE DATE CADD Filename: