


-L-	-Y6-
PI Sta 24+89.91	PI Sta 14+19.91
Δ · 49° 37' 55.2" (LT)	Δ · 4° 54' 27.9" (RT)
D · 9' 44" 39.0"	D · 1' 41" 35.3"
L · 509.35'	L · 289.86'
T · 271.89'	T · 145.02'
R · 588.00'	R · 3,384.00'
SE · RC	
RO · 78.00'	
*Vd · 40 MPH	

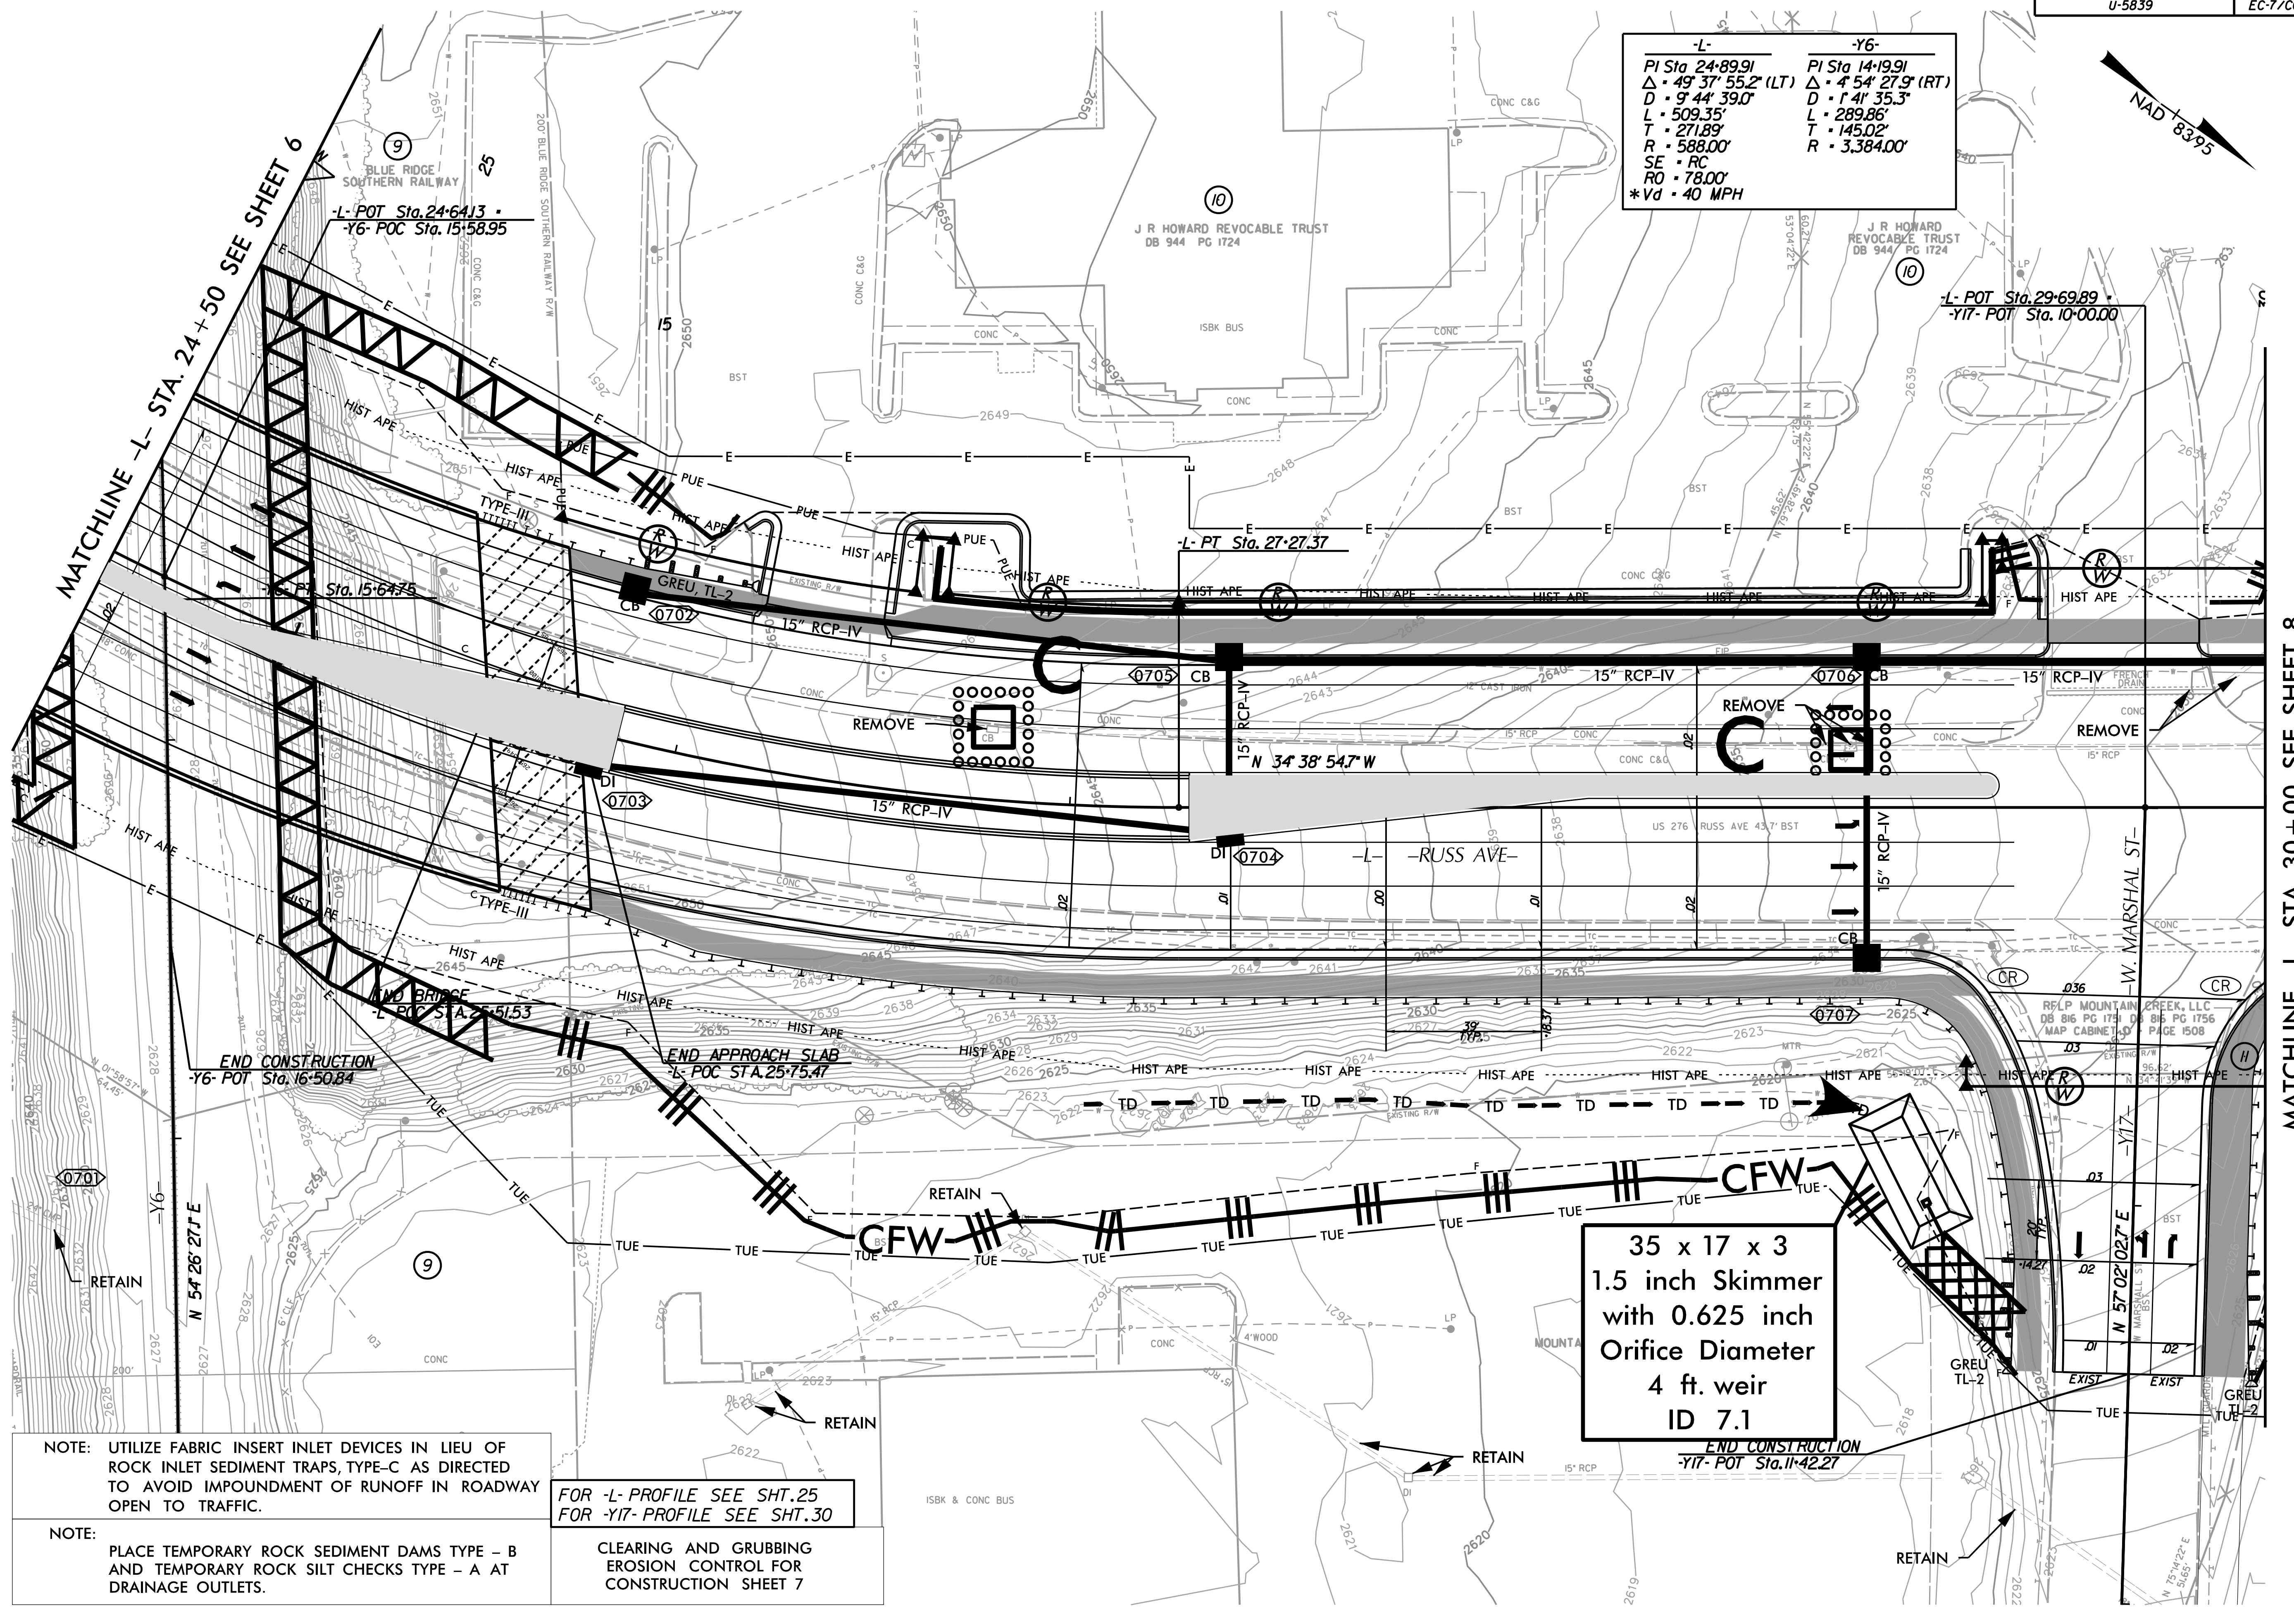

MATCHLINE -L- STA. 24+50 SEE SHEET 6

MATCHLINE -L- STA. 30+00 SEE SHEET 8

END CONSTRUCTION
-Y6- POT Sta. 16+50.84

END APPROACH SLAB
-L- POC STA. 25+75.47

35 x 17 x 3
1.5 inch Skimmer
with 0.625 inch
Orifice Diameter
4 ft. weir
ID 7.1

NOTE: UTILIZE FABRIC INSERT INLET DEVICES IN LIEU OF ROCK INLET SEDIMENT TRAPS, TYPE-C AS DIRECTED TO AVOID IMPOUNDMENT OF RUNOFF IN ROADWAY OPEN TO TRAFFIC.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

FOR -L- PROFILE SEE SHT. 25
FOR -Y17- PROFILE SEE SHT. 30

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 7

REVISIONS

8/17/99
3/13/2023
R:\Environmental\Design\U5839-EC-07-C&G.dgn