


8/17/99


FINAL PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YARD.	R1	SHOULDER BERM GUTTER
C2	PROP. APPROX. 2.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YARD IN EACH OF TWO LAYERS.	T	EARTH MATERIAL
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2.0" IN DEPTH.	U	EXISTING PAVEMENT
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.	W	WEDGING
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" OR GREATER THAN 5.5".	V	INCIDENTAL MILLING


PROJECT REFERENCE NO. <i>B-6046</i>	SHEET NO. <i>2A-1</i>
RW SHEET NO.	
ROADWAY DESIGN ENGINEER 	PAVEMENT DESIGN ENGINEER
10/30/2023	10/27/2023
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
ICE of Carolinas, PLLC 4505 Falls of Neuse Road, Suite 110 Raleigh, North Carolina 27609 Phone: 803-822-0333 License #: P-0999	

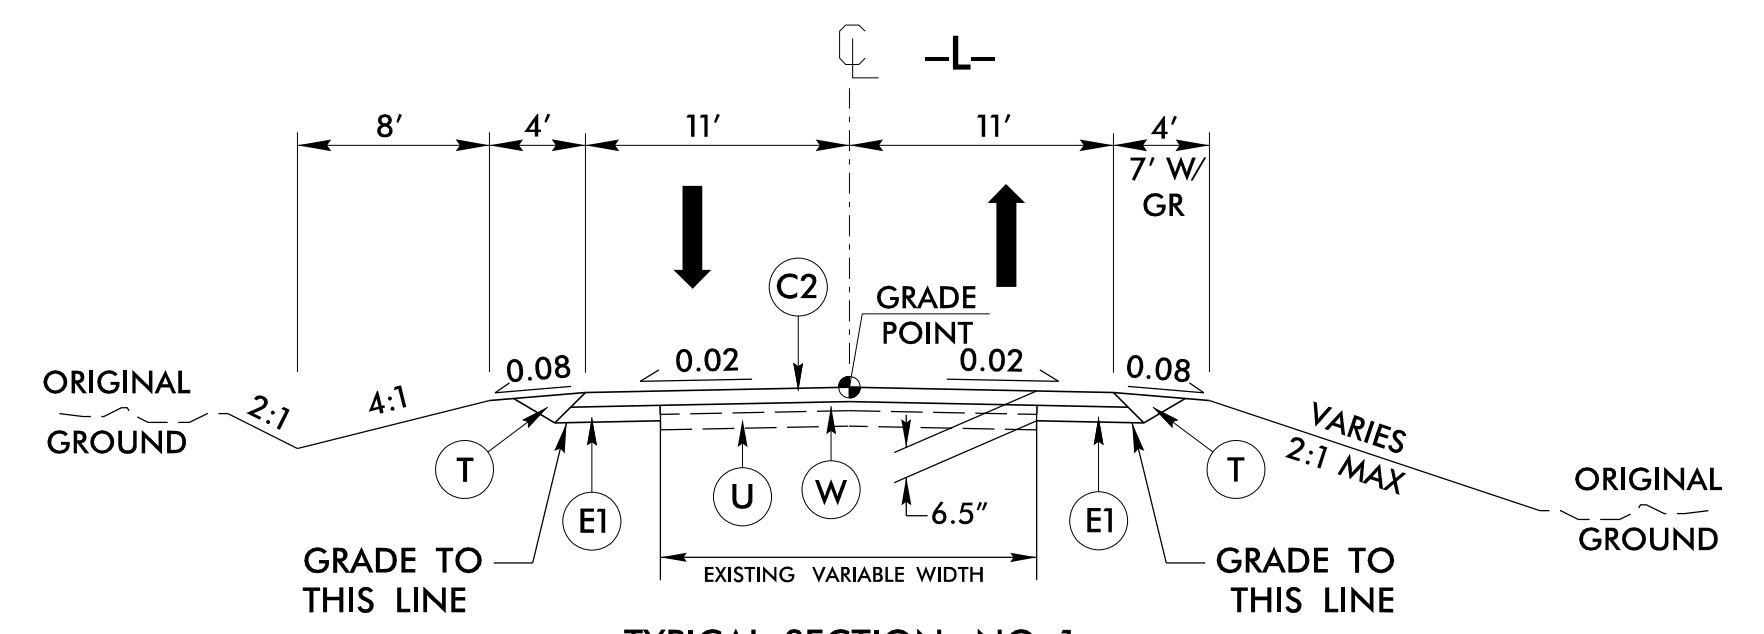


TYPICAL SECTION NO. 1
-L- STA. 13+20.00 TO STA. 15+50.00
-L- STA. 21+00 TO STA. 22+15.00

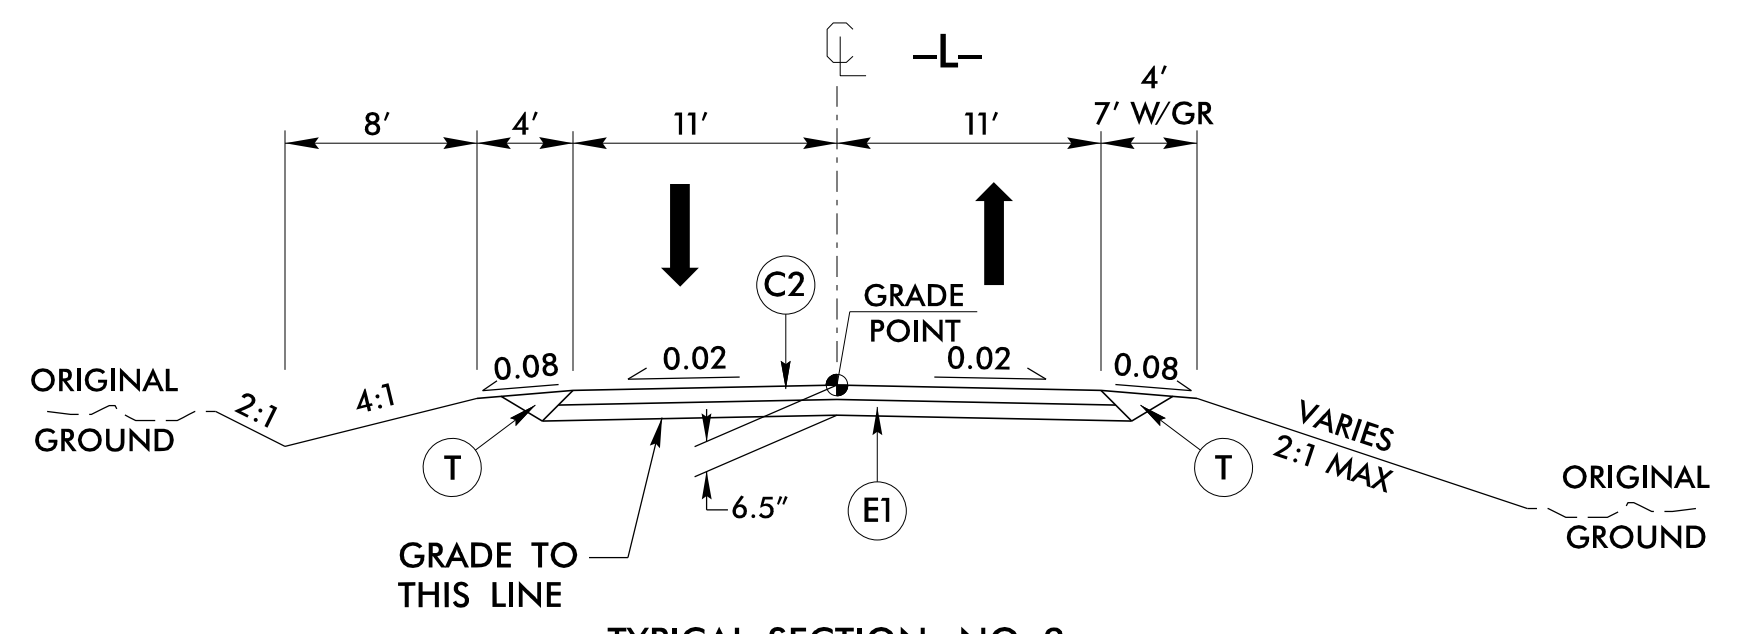


TYPICAL SECTION NO. 2
-L- STA. 15+50.00 TO STA. 16+29.26 (BEGIN BRIDGE)
-L- STA. 19+01.89 (END BRIDGE) TO STA. 21+00.00

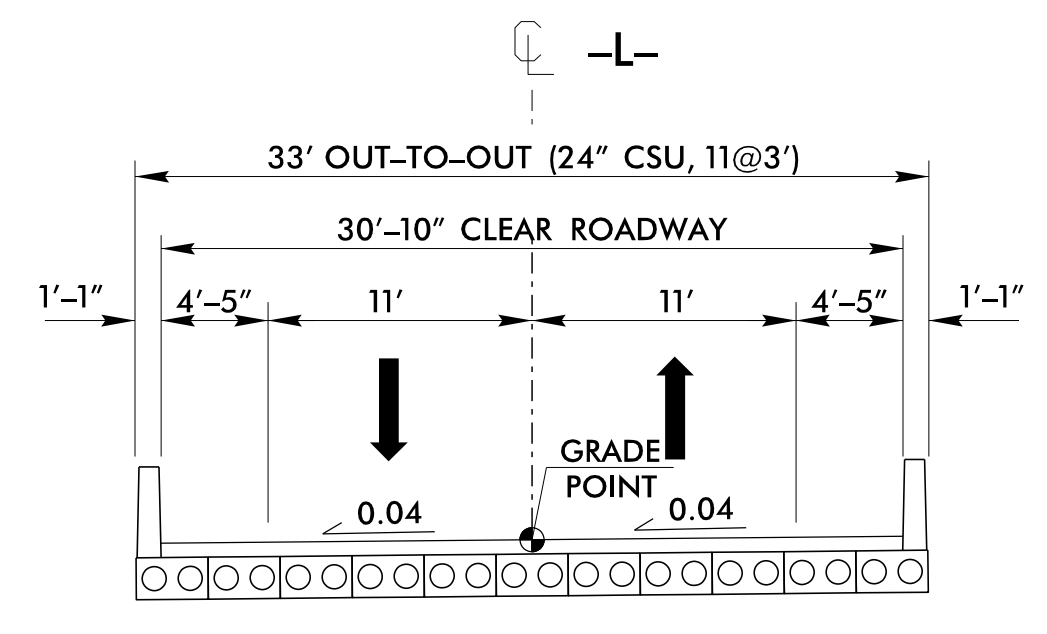




TYPICAL SECTION NO. 3
-L- STA. 16+29.26 TO STA. 19+01.89

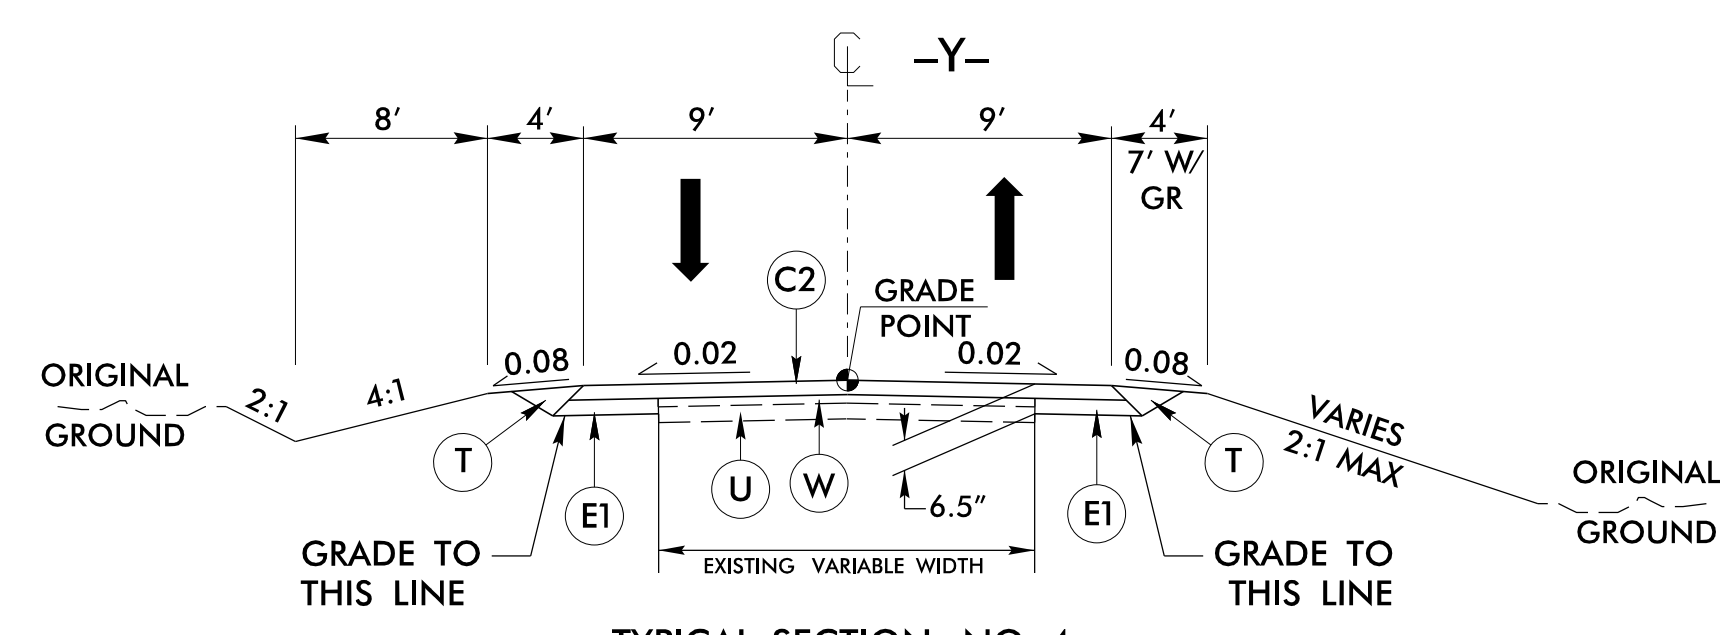

TYPICAL SECTION NO. 4
-Y- STA. 10+15.00 TO STA. 11+00.00

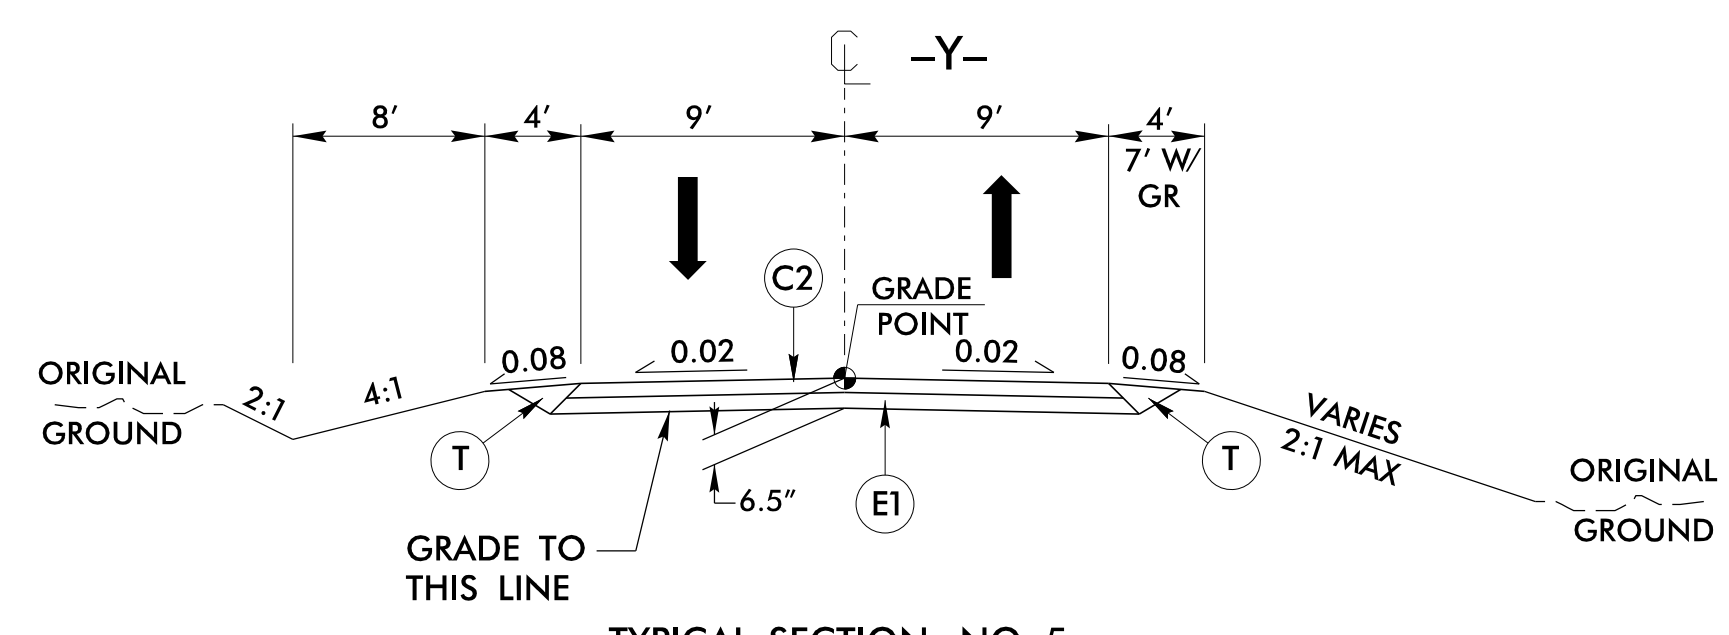

TYPICAL SECTION NO. 5
-Y- STA. 11+00.00 TO STA. 12+00.71

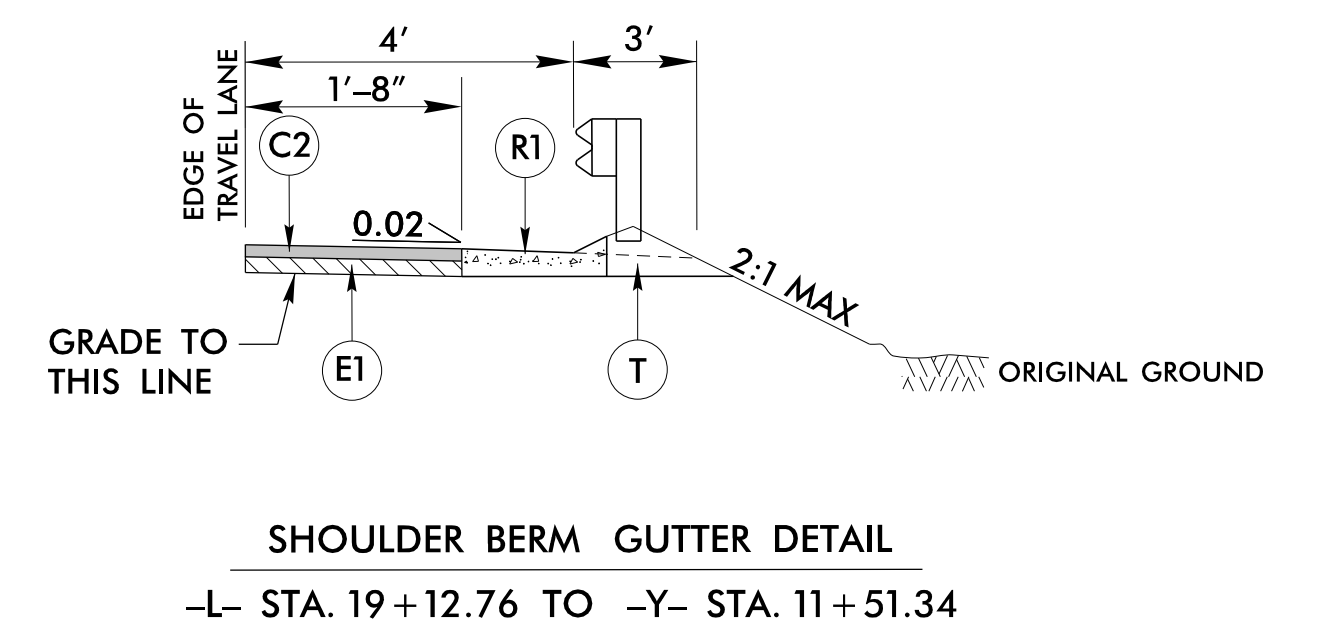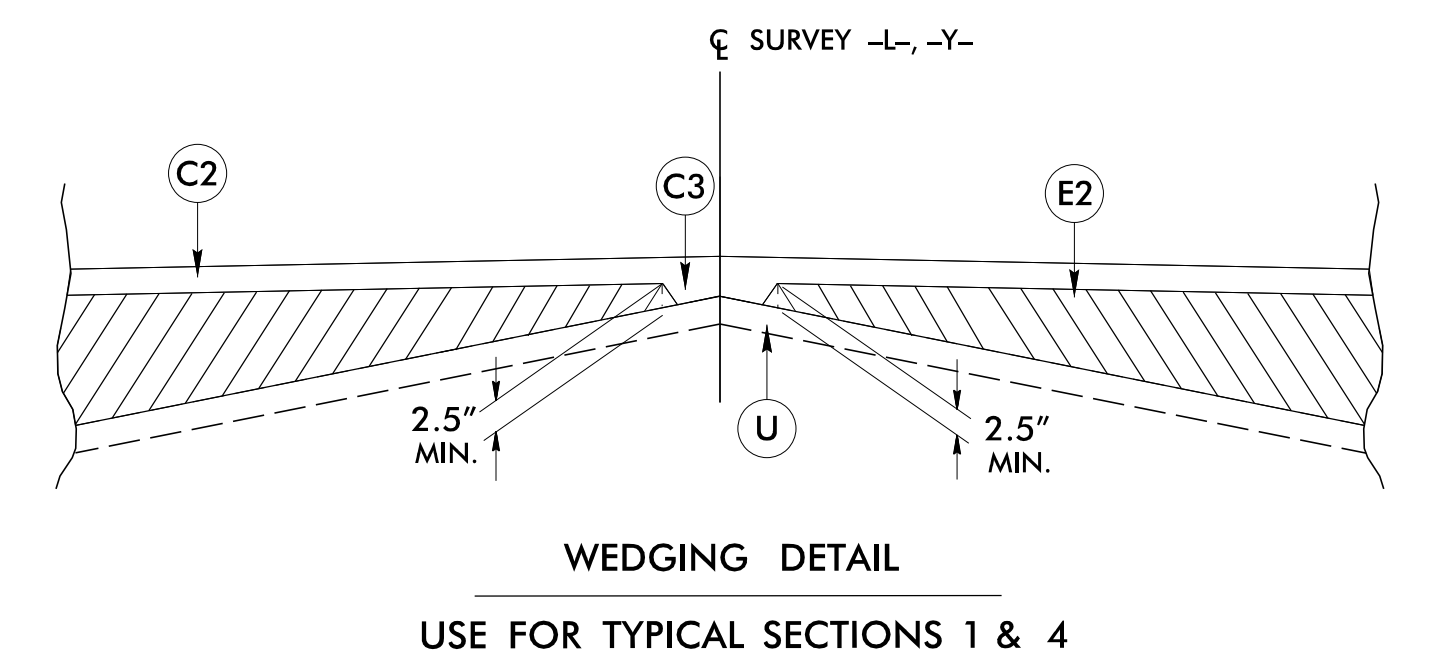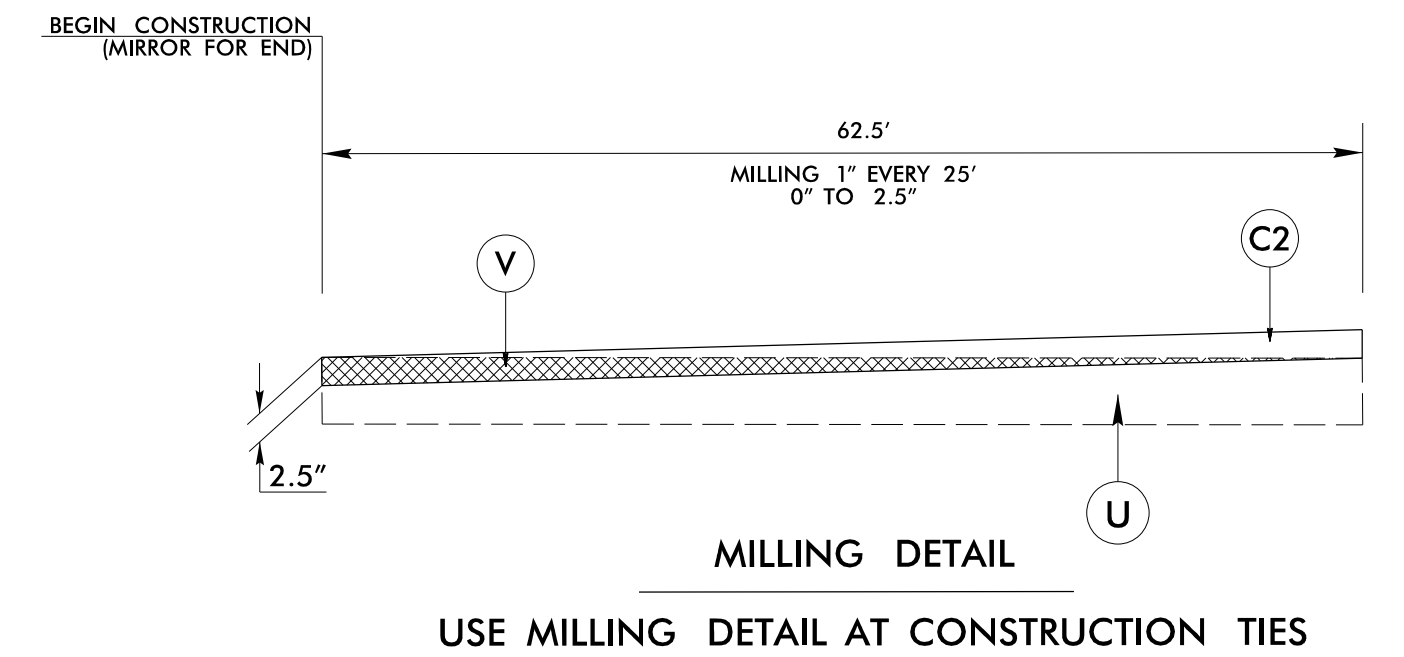

3:49:44 PM R:\Projects\19-05-01_SVU.B.-6046_S191917_Over-Long-Creek\NCDDOT\Roadway\Project\Plansheets\B-6046_r.dwg_PSH_2A-1.dgn