

BOTTOM OF CAP

ELEVATION

93'-0"

2.5 LF ERI


PAN E

SPAN D

2.5 LF ERI

2.5 LF ERI

2.5 LF ERI

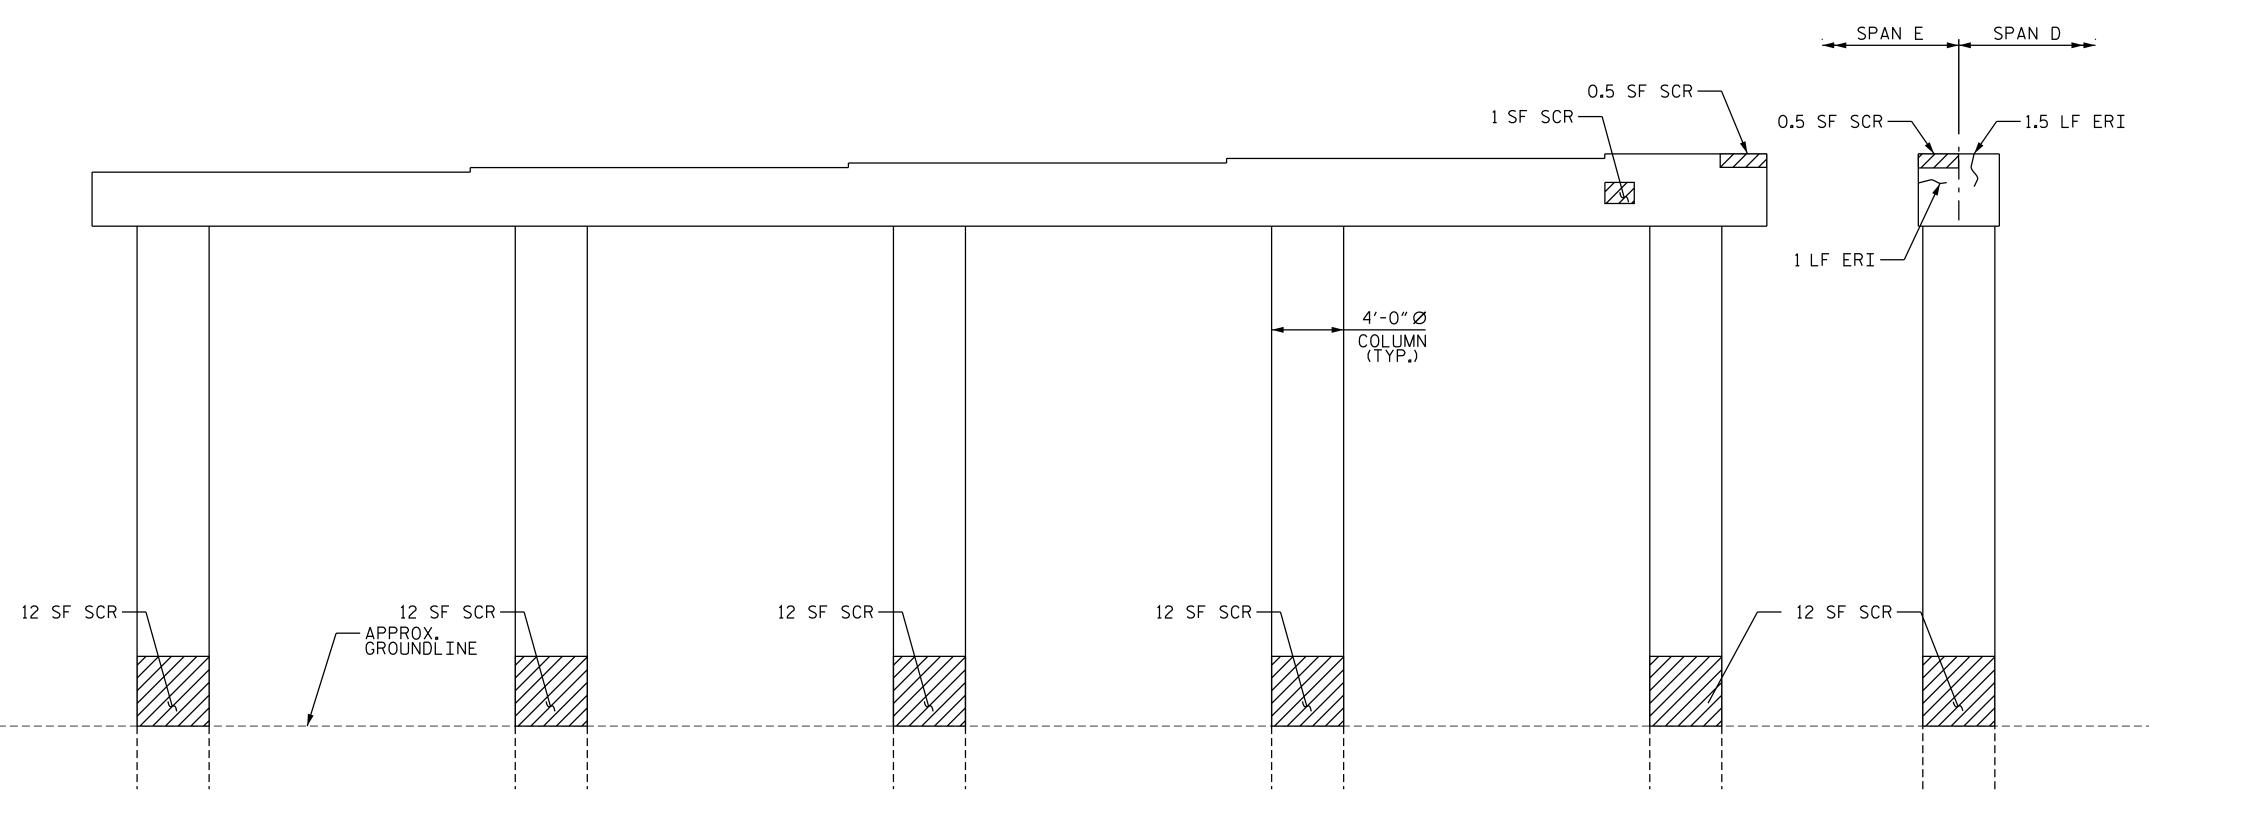

BENT NO. 4
SPAN E FACE

++

END VIEW

FINAL UNI
SIGNATURES

Docusigned by:

Layan, Freedomina

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

Docusigned by:

HAVAIN HERMINIAN
19141A8AF2EAN TH CARO
SEAL

STATE OF NORTH CAROLINA

DEPARTMENT OF TRANSPORTATION

SUBSTRUCTURE REPAIR

BENT 4 SPAN E FACE

E.L. ROBINSON
ENGINEERING
ENGINEERING
BY 3362 Six Forks Rd.
Raleigh, N.C. 27609
Tel: 984,960,2810
elrobinsonengineerin.
License: C--22 9

REVISIONS

SHEET NO. BY: DATE: S5-16

3 TOTAL SHEETS
17

## NOTES:

COLUMN

CAP

CAP

CAP

COLUMN

BENT 4 SPAN E FACE

SHOTCRETE REPAIRS

CONCRETE REPAIRS

EPOXY RESIN INJECTION

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

AS-BUILT REPAIR QUANTITY TABLE

2.0

72.0

AREA

0.0

ESTIMATE

QUANTITIES

0.5

18.0

VOLUME

0.0

LN.FT.

10.0

0.0

ACTUAL

VOĽĎWE

AOĽÑWE

LN.FT.

AREA SF

AREA

CLEAN AND REMOVE DEBRIS FROM THE TOP OF THE CAP AND APPLY EPOXY PROTECTIVE COATING. EPOXY COATING SHALL BE APPLIED TO THE TOP SURFACE OF THE CAP. THE CONTRACTOR SHALL NOT COAT THE AREA OF THE CAP BENEATH THE MASONARY PLATES. FOR EPOXY COATING, SEE SPECIAL PROVISIONS.

SHOTCRETE REPAIRS MAY BE REPLACED WITH CONCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.

FOR CAP AND COLUMN REPAIRS, SEE "TYPICAL CAP AND COLUMN REPAIR DETAILS", SHEET.

FOR SHOTCRETE REPAIR, SEE SPECIAL PROVISIONS.

FOR CONCRETE REPAIR, SEE SPECIAL PROVISIONS.

FOR EPOXY RESIN INJECTION, SEE SPECIAL PROVISIONS.

SHOTCRETE REPAIR (SCR)

CONCRETE REPAIR (CR)

EPOXY RESIN INJECTION (ERI)

PROJECT NO. I-5941

DURHAM COUNTY

BRIDGE NO. 310429

SHEET 9 OF 10