




TYPICAL SECTION 1
MAP 1 US-421N
MAP 2 US-421S

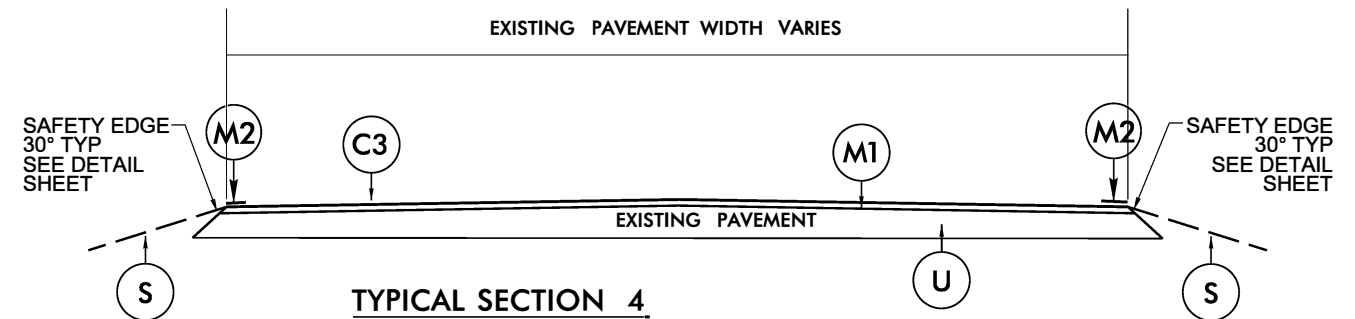


TYPICAL SECTION 4
MAP 5 US-158W (RAMPS)
MAP 6 US-158E (RAMPS)

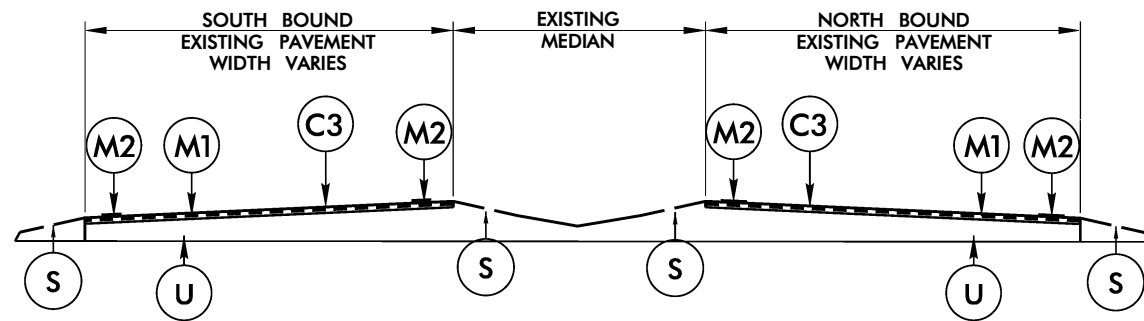


TYPICAL SECTION 2
MAP 3 US-421N
MAP 4 US-421S
MAP 5 US-158W/US-421N
MAP 6 US-158E/US-421S

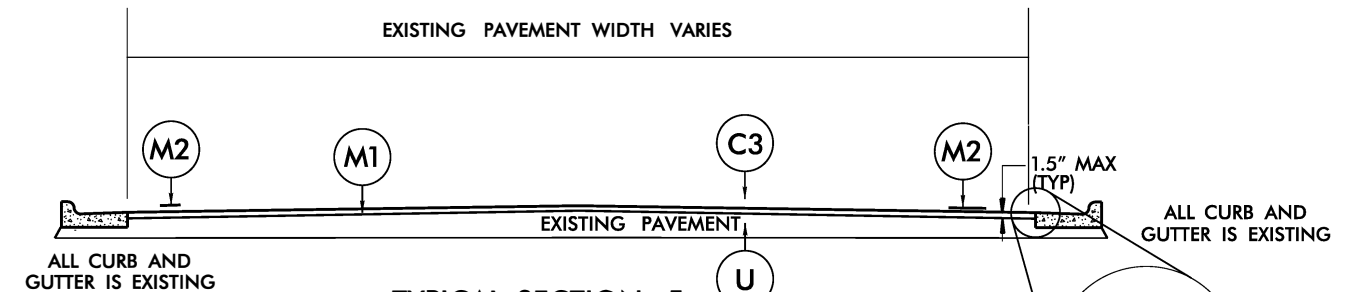

TYPICAL SECTION 5
MAP 5 US-158W (RAMPS)
MAP 6 US-158E (RAMPS)

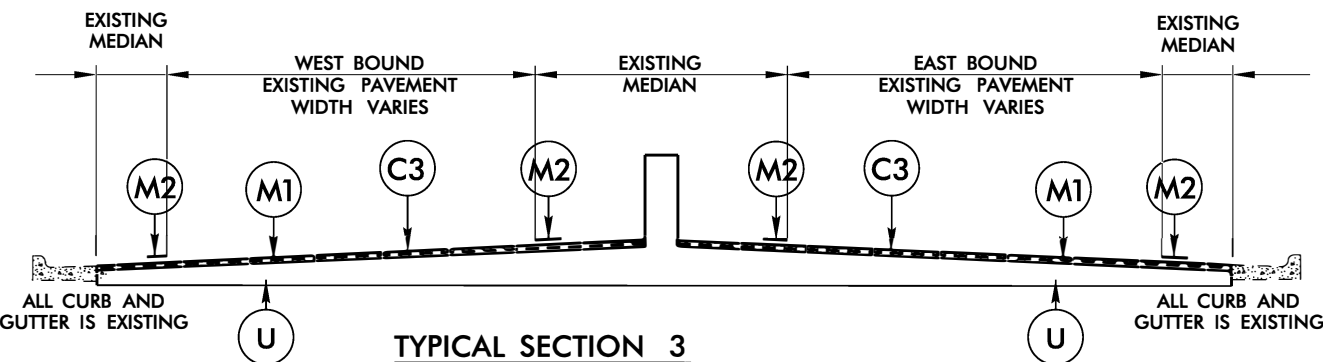

TYPICAL SECTION 3
MAP 5 US-158W/US-421N
MAP 6 US-158E/US-421S

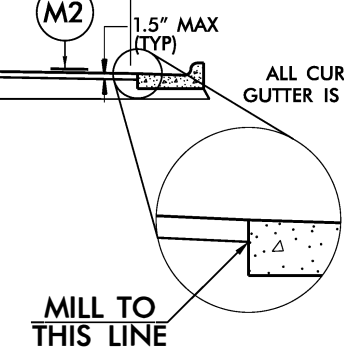

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C3	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
M1	MILL ASPHALT PAVEMENT, 1½" DEPTH
M2	10" WIDE SINUSOIDAL MILLED RUMBLE STRIP
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT