
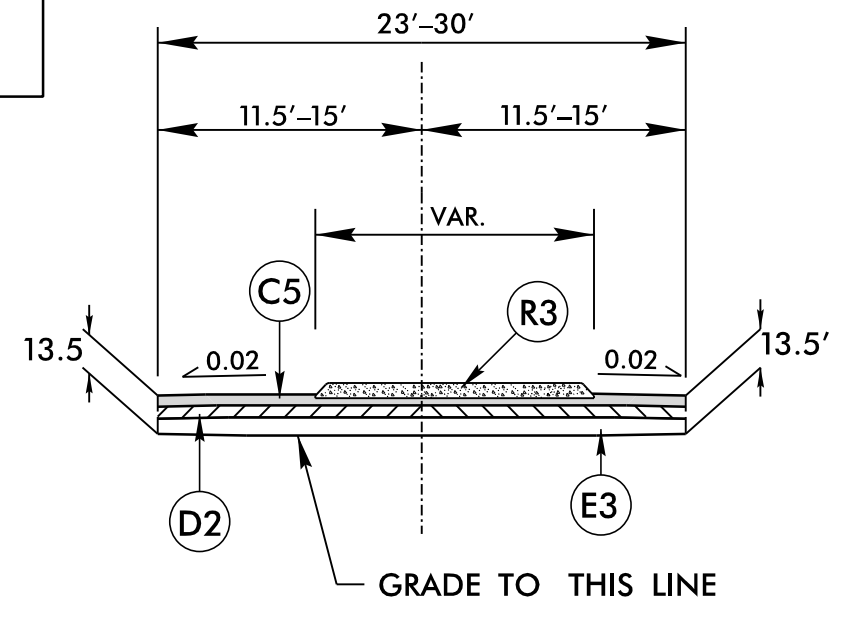
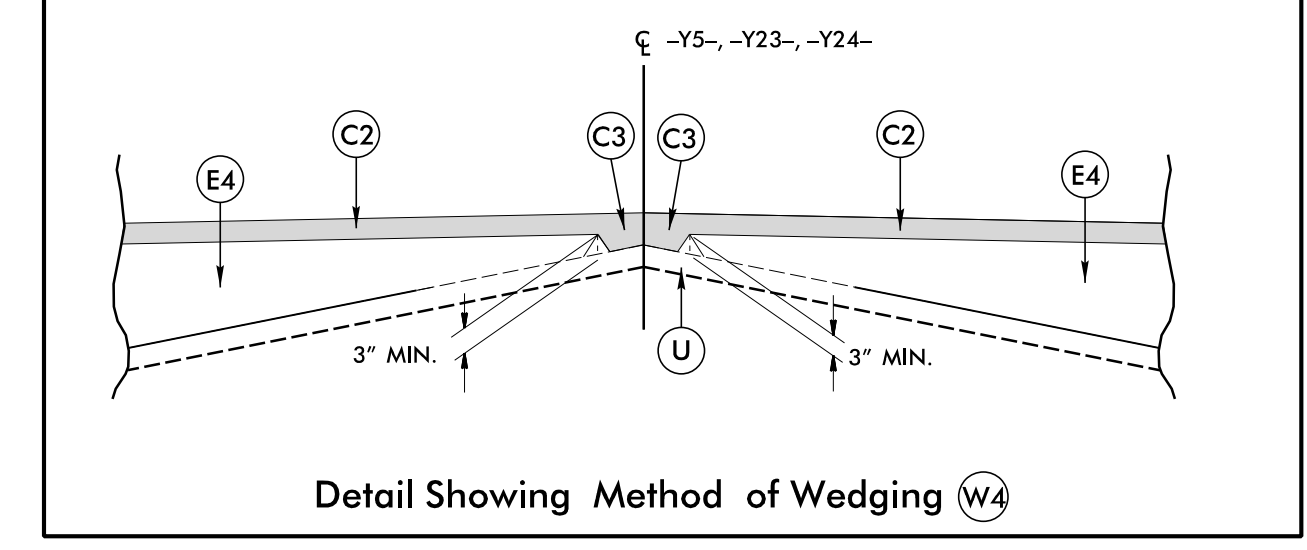
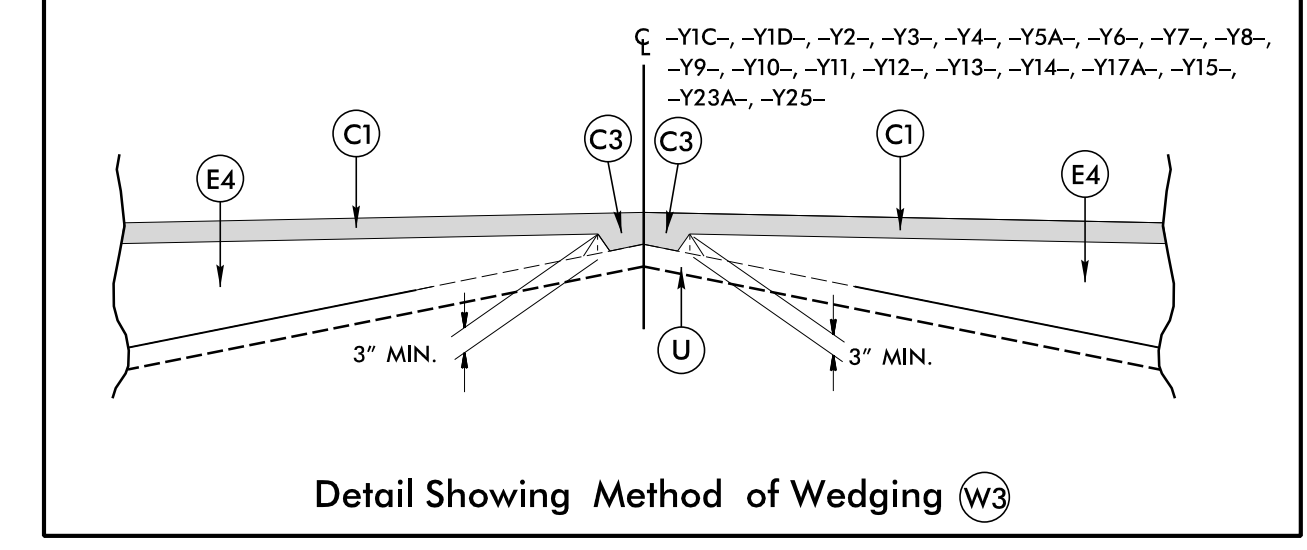
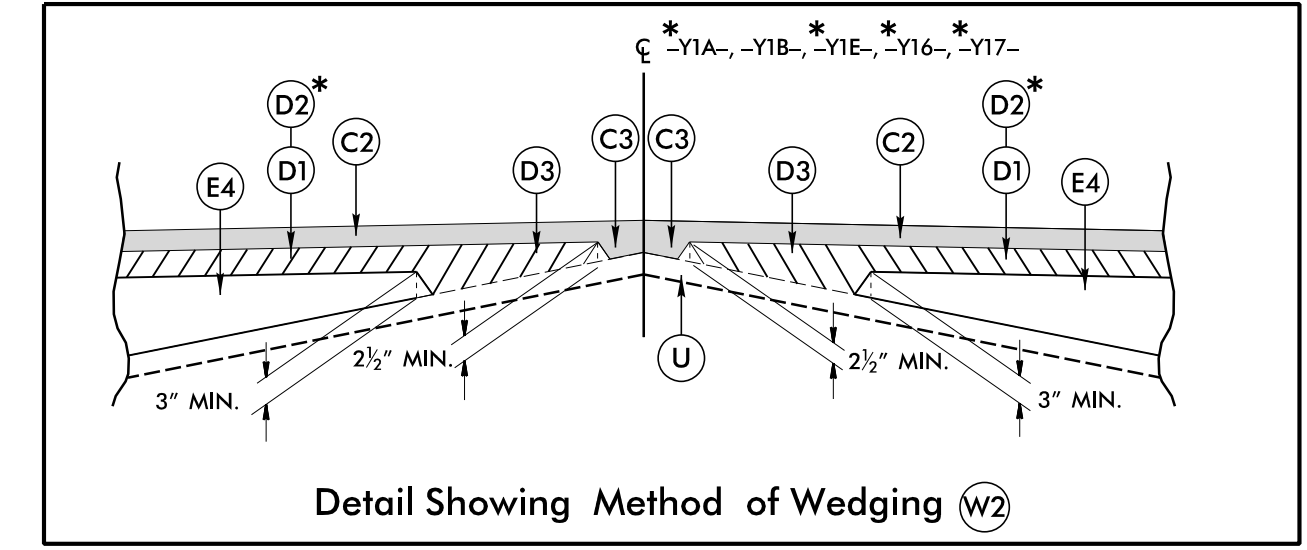
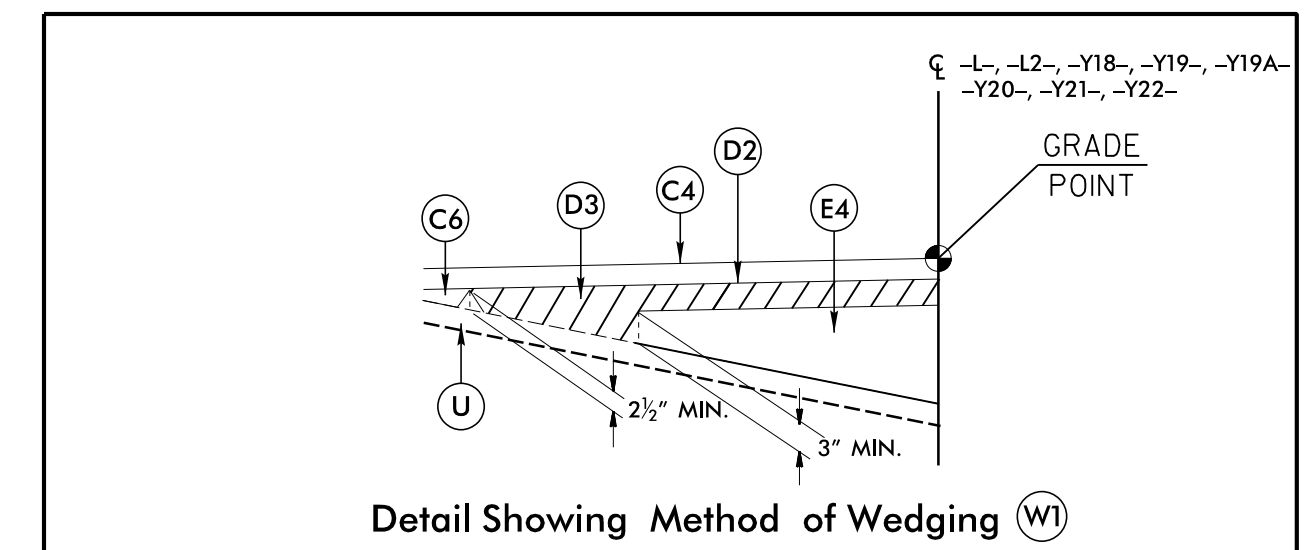
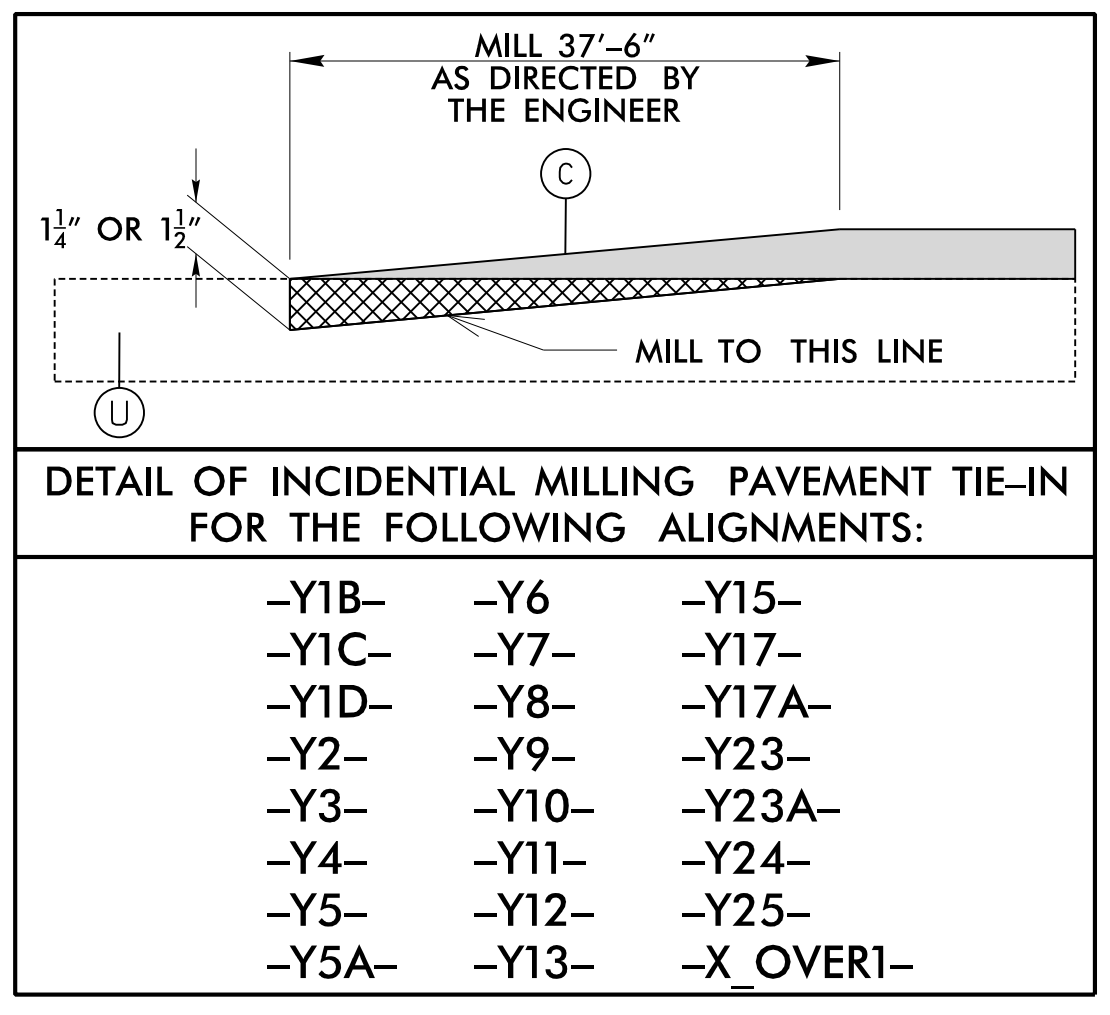



PAVEMENT SCHEDULE

FINAL PAVEMENT DESIGN

C1	PROP. APPROX. 2½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	K	PROP. 12" CLASS IV SUBGRADE SABILIZATION
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	M1	2'X4" BENCH MILLING -L- (SEE DETAIL)
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1½" IN DEPTH.	M2	2'X2½" BENCH MILLING -Y-LINES (SEE DETAIL)
C4	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	N	GEOTEXTILE FOR SUBGRADE STABILIZATION
C5	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	R1	2'-6" CURB & GUTTER
C6	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1½" IN DEPTH OR GREATER THAN 2" IN DEPTH.	R2	1'-6" CURB & GUTTER
C7	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.	R3	5" MONOLITHIC CONCRETE ISLAND (KEYED IN)
D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	R4	8"X18" CONCRETE CURB
D2	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	S	4" CONCRETE SIDEWALK
D3	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.	T	EARTH MATERIAL
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.	U	EXISTING PAVEMENT
E2	PROP. APPROX. 5½". DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.	V	MILLING BITUMINOUS PAVEMENT, 1.5" DEPTH
E3	PROP. APPROX. 6½". DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 370.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.	W	WEDGING VARIABLE DEPTH ASPHALT PAVEMENT (SEE WEDGING DETAILS)
E4	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH.		

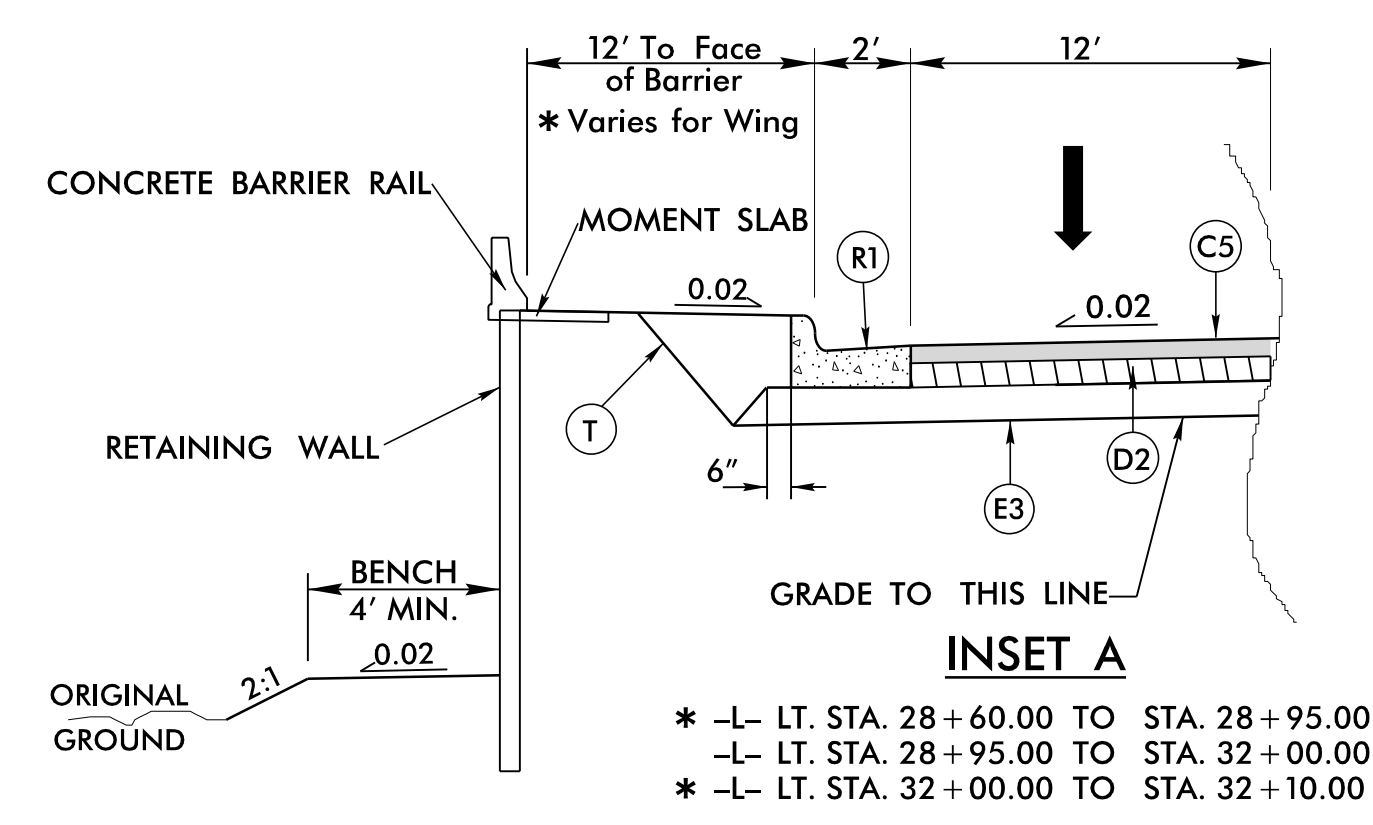





- SEE PLANS FOR THE ACTUAL ISLAND LOCATION
- L- STA. 1+75.19 TO STA. 11+39.45
 - L- STA. 18+09.02 TO STA. 21+12.08
 - L- STA. 72+95.69 TO STA. 78+00.00
 - L- STA. 82+65.93 TO STA. 86+36.21
 - L- STA. 121+54.90 TO STA. 127+02.37
 - L- STA. 131+05.51 TO STA. 135+65.10
 - L- STA. 194+57.69 TO STA. 194+93.20
 - L2- STA. 241+55.72 TO STA. 242+09.26
 - L- STA. 242+08.28 TO STA. 249+45.58
 - L- STA. 280+00.00 TO STA. 281+12.04
 - L- STA. 284+92.35 TO STA. 289+51.53
 - L- STA. 291+52.46 TO STA. 291+88.45
 - L- STA. 298+87.96 TO STA. 300+18.66
 - Y20- STA. 96+40.00 TO STA. 97+79.58
 - Y20- STA. 99+66.87 TO STA. 100+30.63

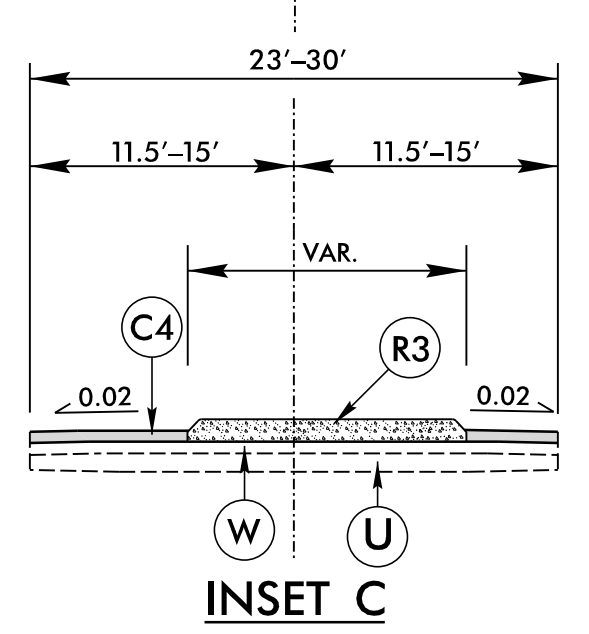

- SEE PLANS FOR THE ACTUAL ISLAND LOCATION
- L- STA. 15+02.09 TO STA. 18+09.02
 - L- STA. 21+12.08 TO STA. 23+94.65
 - L- STA. 48+22.51 TO STA. 54+60.36
 - L- STA. 68+80.00 TO STA. 72+95.69
 - L- STA. 78+00.00 TO STA. 79+68.41
 - L- STA. 86+36.21 TO STA. 88+06.21
 - L- STA. 105+49.67 TO STA. 106+61.67
 - L- STA. 112+14.46 TO STA. 121+54.90
 - L- STA. 127+02.37 TO STA. 131+05.51
 - L- STA. 135+65.10 TO STA. 136+93.67
 - L- STA. 179+00.88 TO STA. 180+12.89
 - L- STA. 193+81.21 TO STA. 194+57.69
 - L2- STA. 207+45.41 TO STA. 209+89.46
 - L2- STA. 212+74.96 TO STA. 215+44.32
 - L2- STA. 217+48.06 TO STA. 218+63.29
 - L- STA. 251+68.12 TO STA. 252+17.59
 - L- STA. 289+51.53 TO STA. 291+52.46

PROJECT REFERENCE NO. R-2577A	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER SEAL 16725 CONNOR P. BLEVINS	PAVEMENT DESIGN ENGINEER SEAL 018969 DONNIE K. JAMES

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

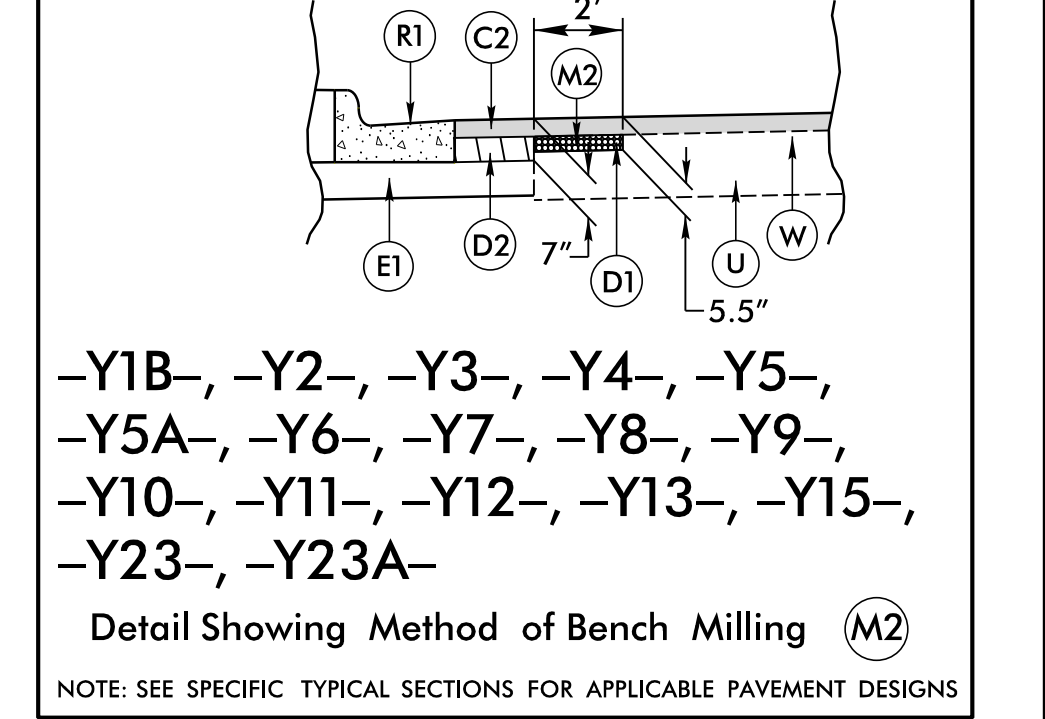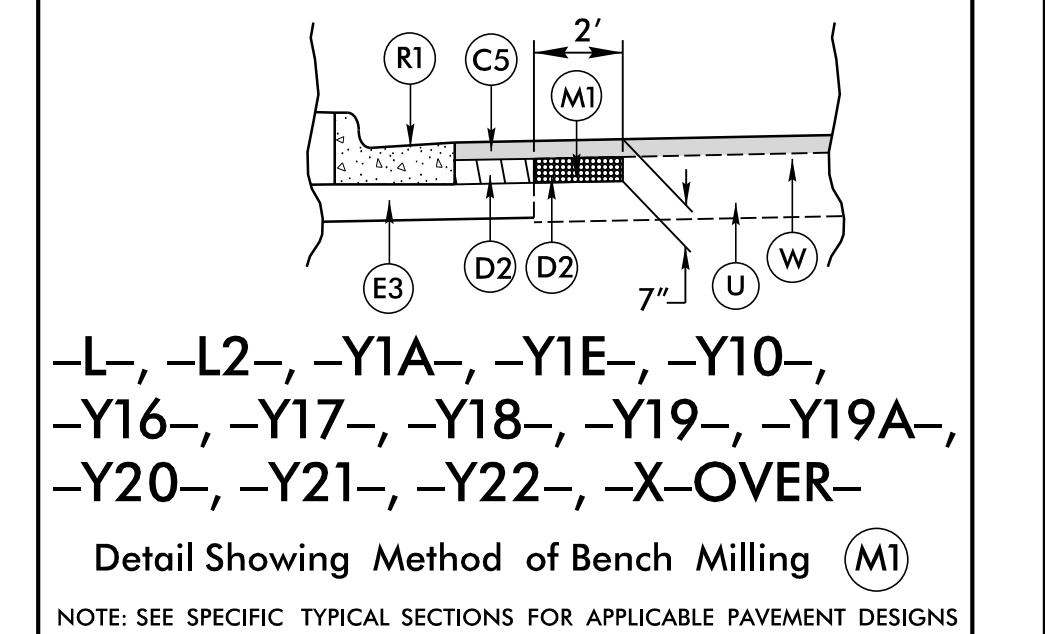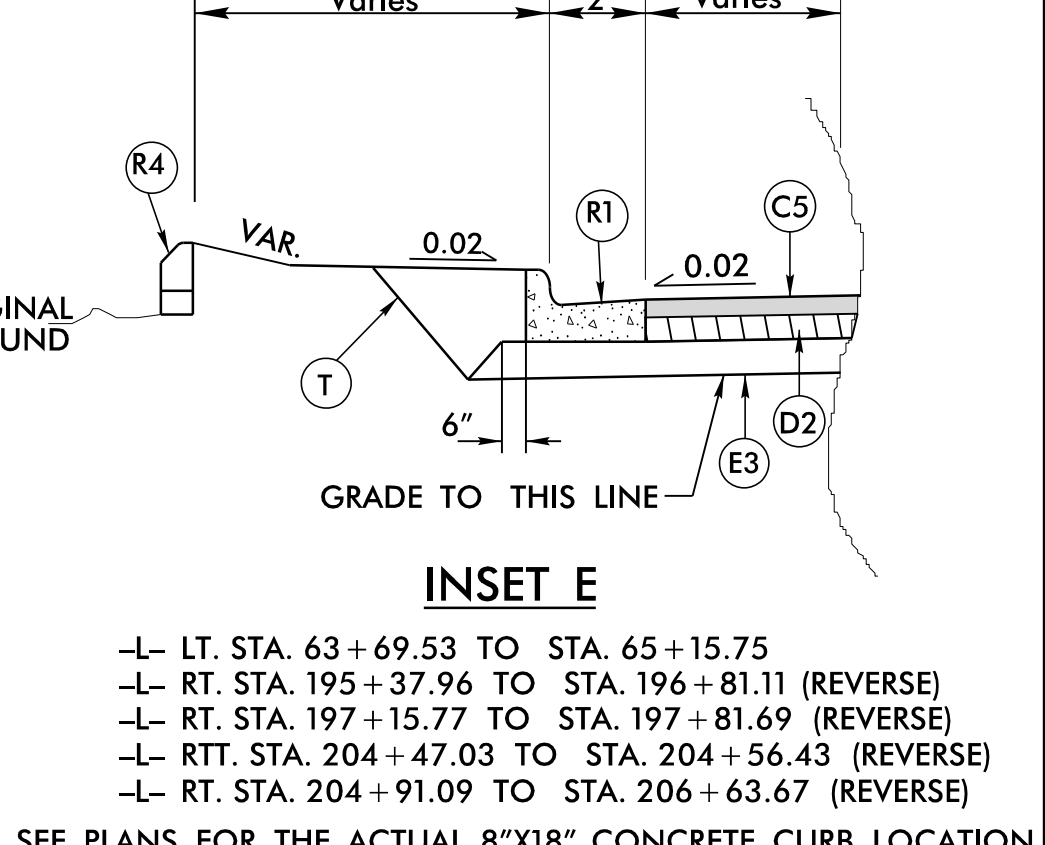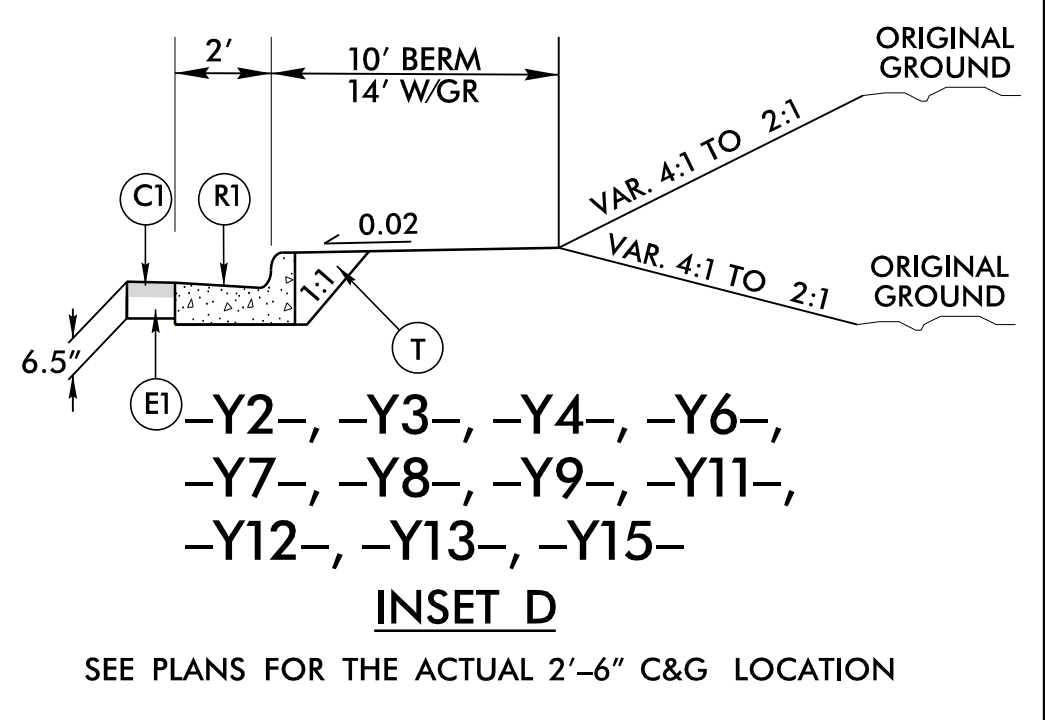

RK&K

P: (919) 878-9560
 6801 Six Forks Road, Forum 1, Suite 700
 Raleigh, North Carolina 27615-3960
 NC License No. F-0112

Engineers | Construction Managers | Planners | Scientists
 www.rkk.com
 Responsive People | Creative Solutions