


|                                  |                             |
|----------------------------------|-----------------------------|
| PROJECT REFERENCE NO.<br>R-2577A | SHEET NO.<br>EC-22/CONST.22 |
| RW SHEET NO.                     | HYDRAULICS ENGINEER         |
| ROADWAY DESIGN ENGINEER          |                             |

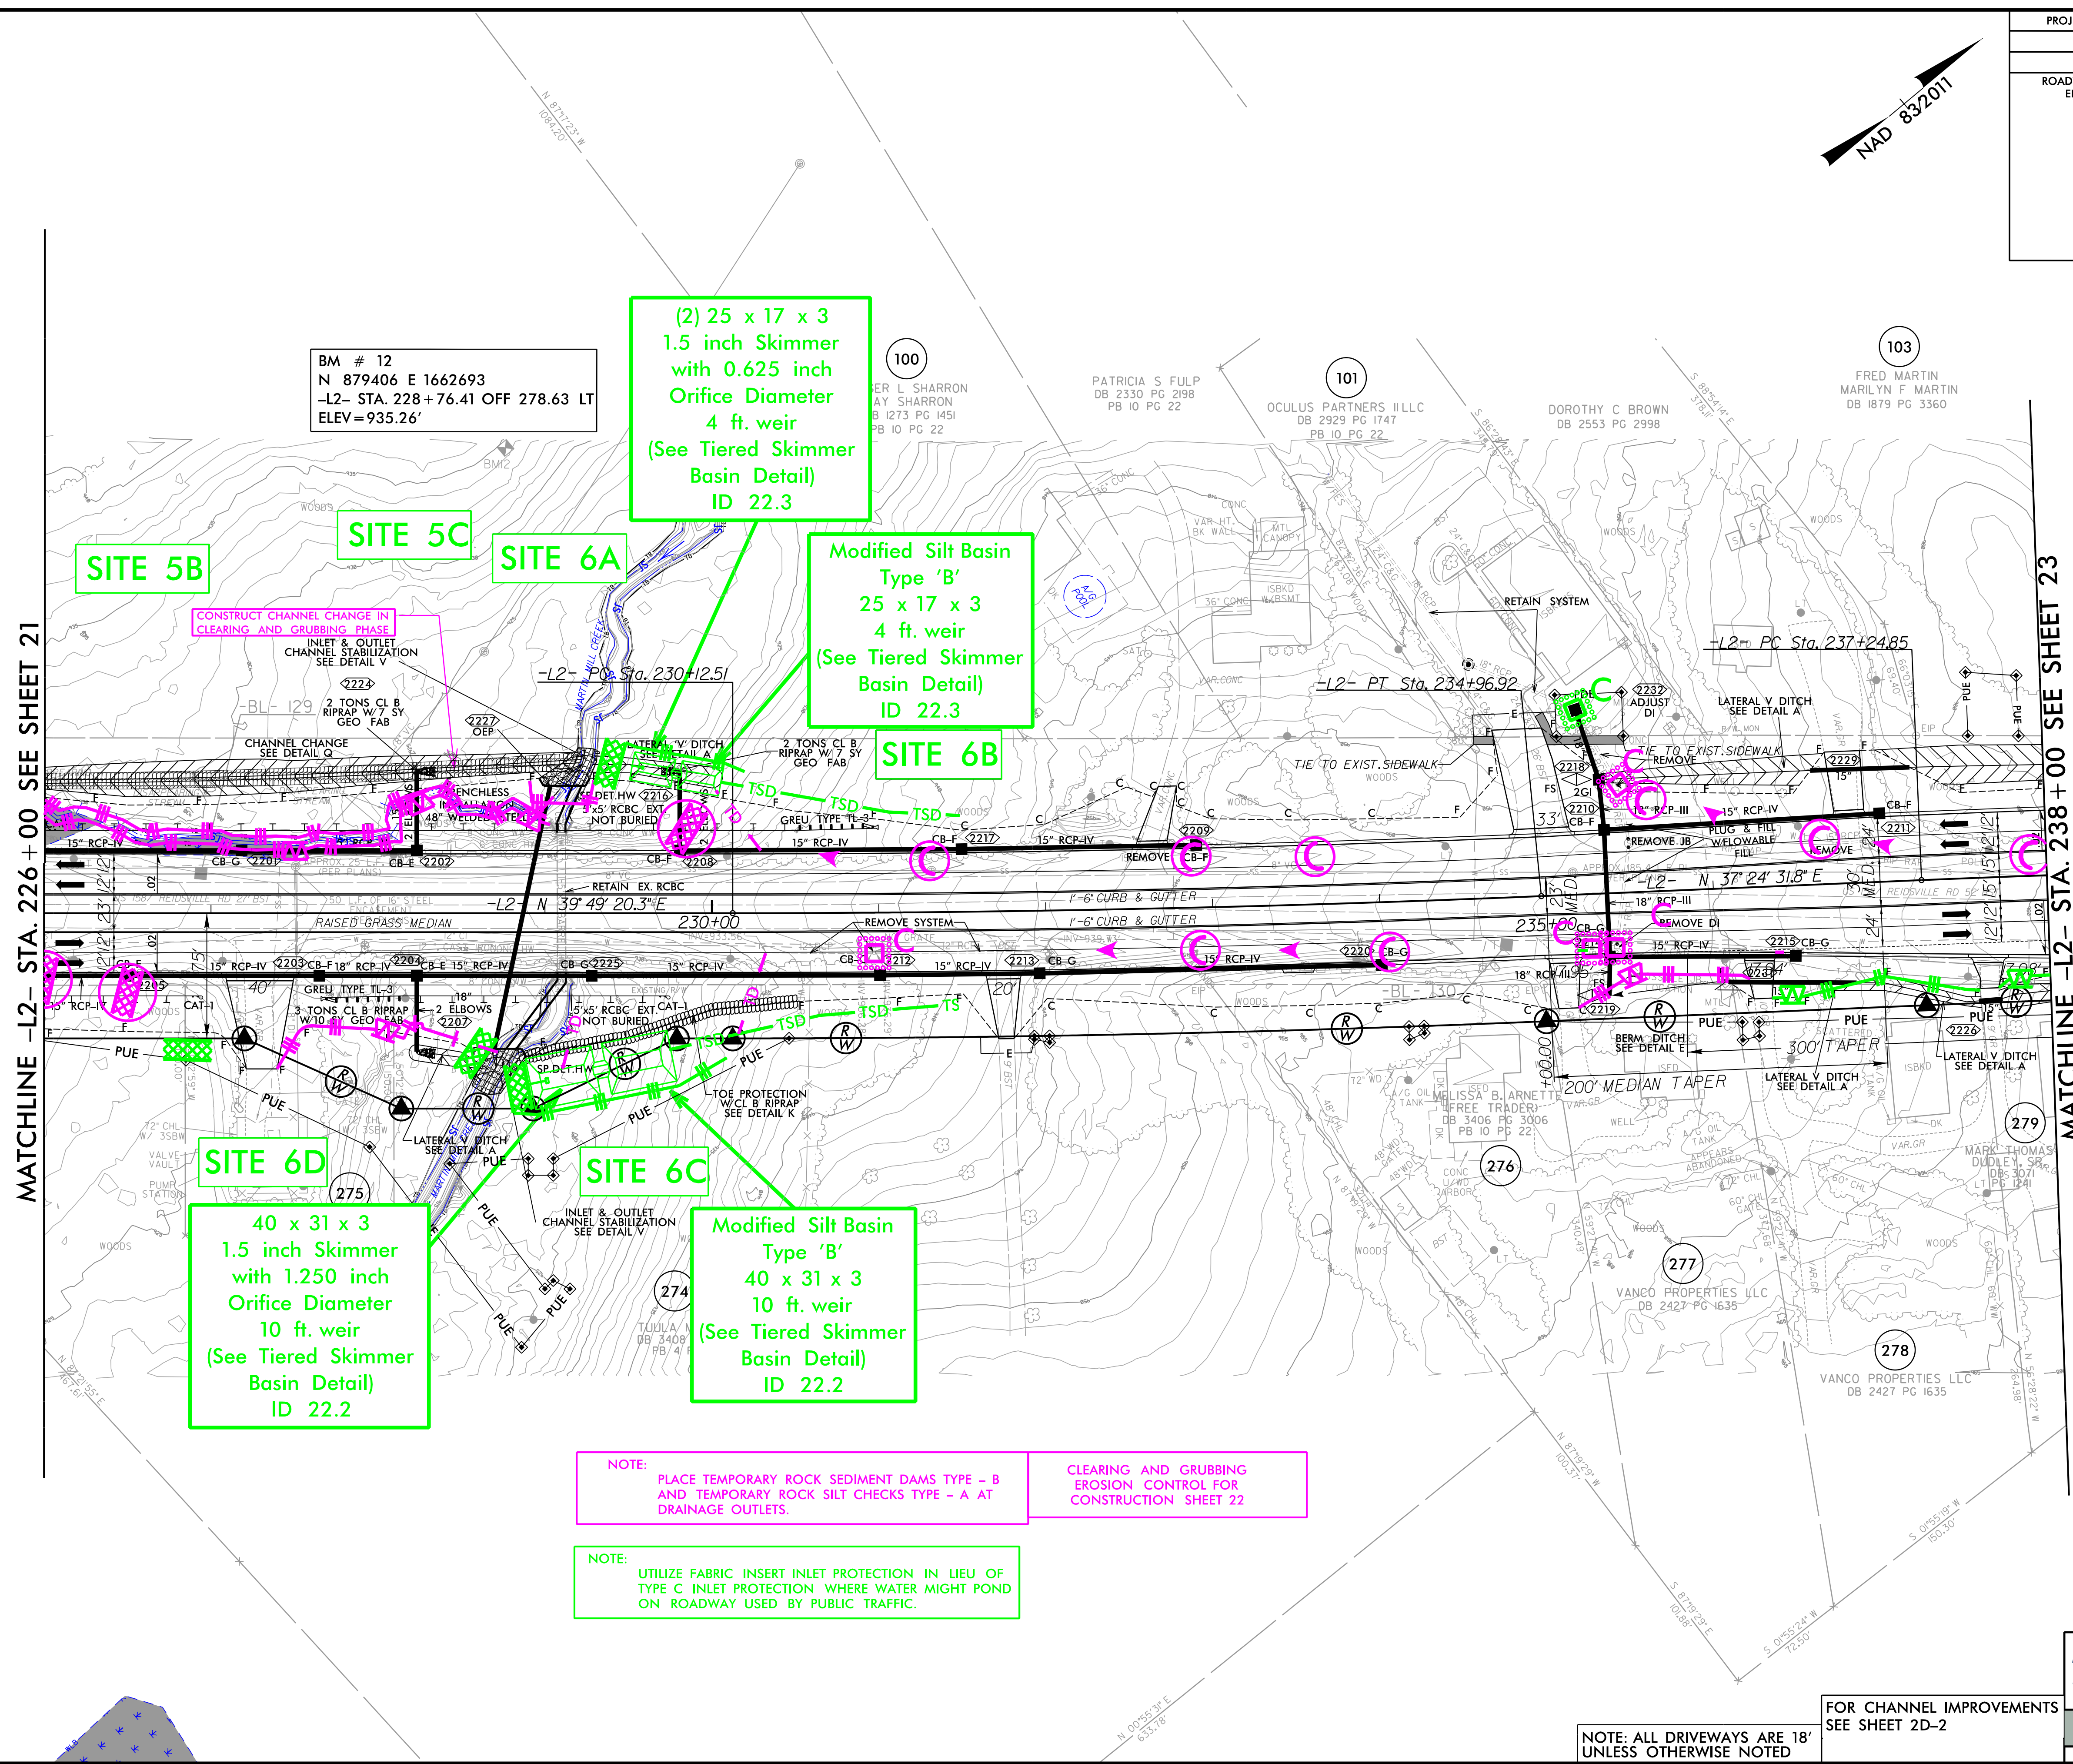

BM # 12  
N 879406 E 1662693  
-L2- STA. 228 + 76.41 OFF 278.63 LT  
ELEV = 935.26'

(2) 25 x 17 x 3  
1.5 inch Skimmer  
with 0.625 inch  
Orifice Diameter  
4 ft. weir  
(See Tiered Skimmer  
Basin Detail)  
ID 22.3

Modified Silt Basin  
Type 'B'  
25 x 17 x 3  
4 ft. weir  
(See Tiered Skimmer  
Basin Detail)  
ID 22.3

40 x 31 x 3  
1.5 inch Skimmer  
with 1.250 inch  
Orifice Diameter  
10 ft. weir  
(See Tiered Skimmer  
Basin Detail)  
ID 22.2

Modified Silt Basin  
Type 'B'  
40 x 31 x 3  
10 ft. weir  
(See Tiered Skimmer  
Basin Detail)  
ID 22.2

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 22

NOTE: UTILIZE FABRIC INSERT INLET PROTECTION IN LIEU OF TYPE C INLET PROTECTION WHERE WATER MIGHT POND ON ROADWAY USED BY PUBLIC TRAFFIC.

MATCHLINE -L2- STA. 226 + 00 SEE SHEET 21

MATCHLINE -L2- STA. 238 + 00 SEE SHEET 23

NOTE: ALL DRIVEWAYS ARE 18' UNLESS OTHERWISE NOTED

FOR CHANNEL IMPROVEMENTS SEE SHEET 2D-2

**RK&K**  
P: (919) 378-9550  
8601 Six Forks Road, Forum 1, Suite 700  
Raleigh, North Carolina 27615-3960  
NC License No. F-0112  
Engineers | Construction Managers | Planners | Scientists  
www.rk.com  
Responsive People | Creative Solutions

8/17/19

I:\14\2023\Hydraulics\CA\DD\PSH\ER\osionControl\NR-2577A-EC\_psh22.dgn