

SHAFT I.D. TAG (PROVIDE ON SHAFT OF STRAIN POLES AND MAST ARM POLE SHAFT) ARM I.D. TAG

(PROVIDE ON EACH SECTION OF
A MULTI-SECTION MAST ARM)

MFG _____MFG. DATE: MM/YY


SECTION D/T/L/Y ----/----

NCDOT SIG. INV. NO. — — — —

NOTES:


- 1. D = DIAMETER, T = THICKNESS, L = LENGTH, Y = YIELD STRENGTH
- 2. A.B. = ANCHOR BOLT
- 3. B.C. = BOLT CIRCLE OF ANCHOR BOLTS
- 4. IF STANDARD DESIGN, INCLUDE CASE NUMBER IN ADDITION TO POLE NUMBER ON "NCDOT POLE NO." LINE.
- 5. SIGNAL INV. NUMBER AND POLE I.D. NUMBER.
 SEE DRAWING M3 AND M4 FOR MOUNTING POSITIONS OF I.D. TAGS.


IDENTIFICATION TAG DETAILS

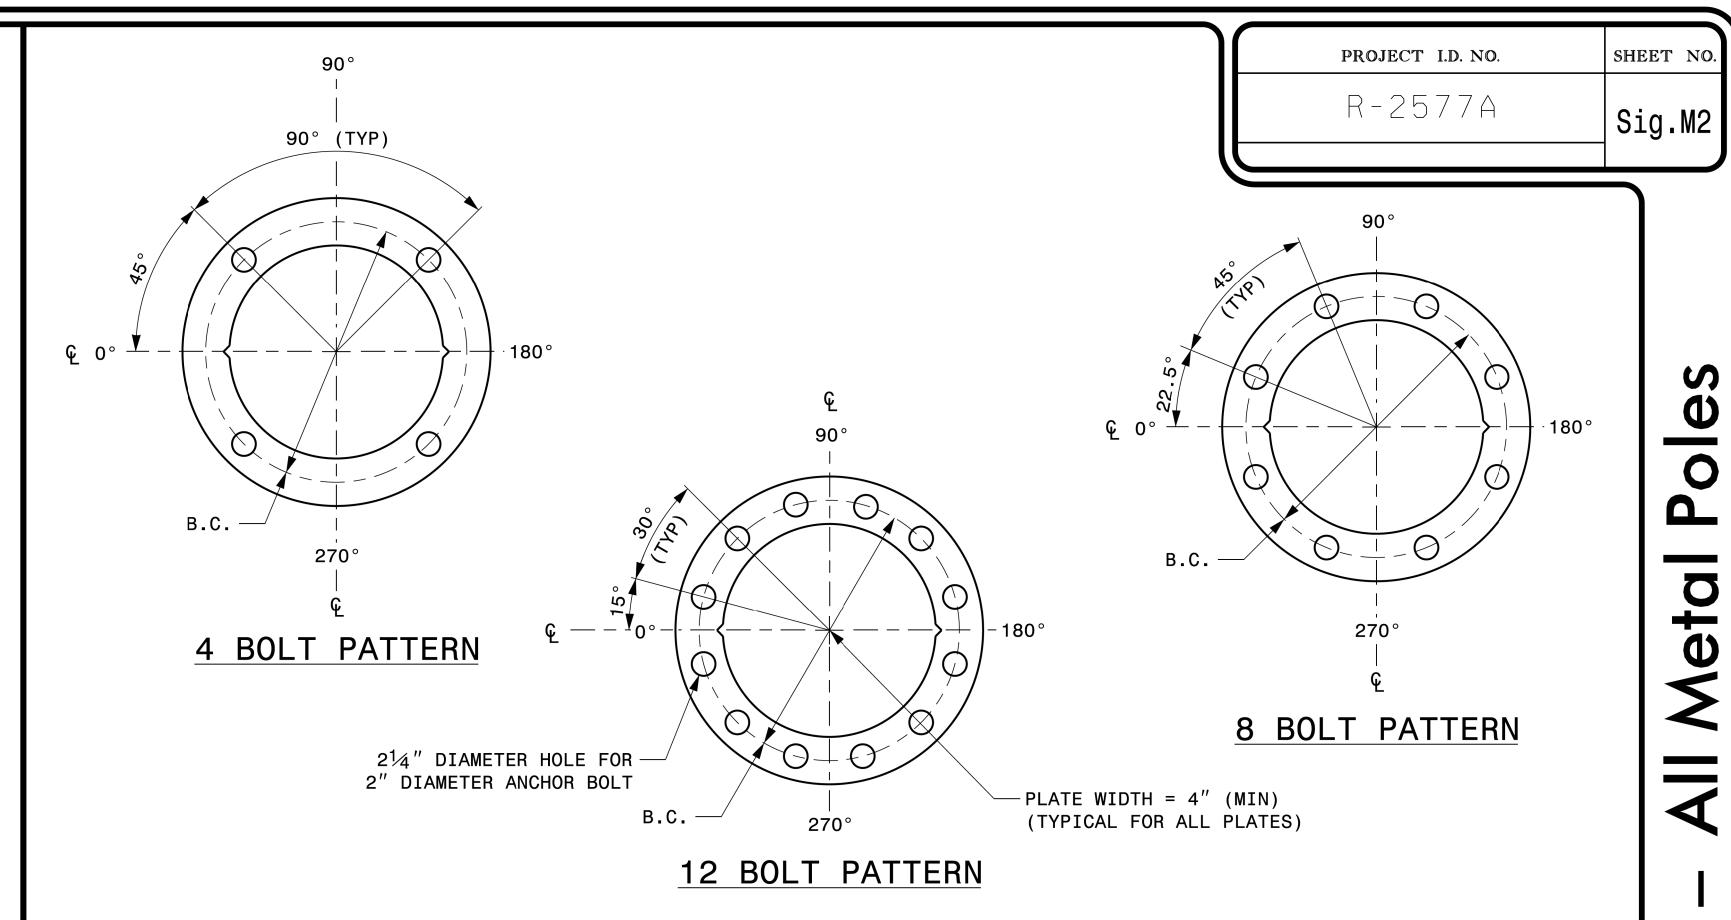

CONSTRUCT TEMPLATES AND PLATES FROM $1/4\,^{\prime\prime}$ (MIN) THICK STEEL. GALVANIZING IS NOT REQUIRED.

BASE PLATE TEMPLATE AND ANCHOR BOLT LOCK PLATE DETAILS

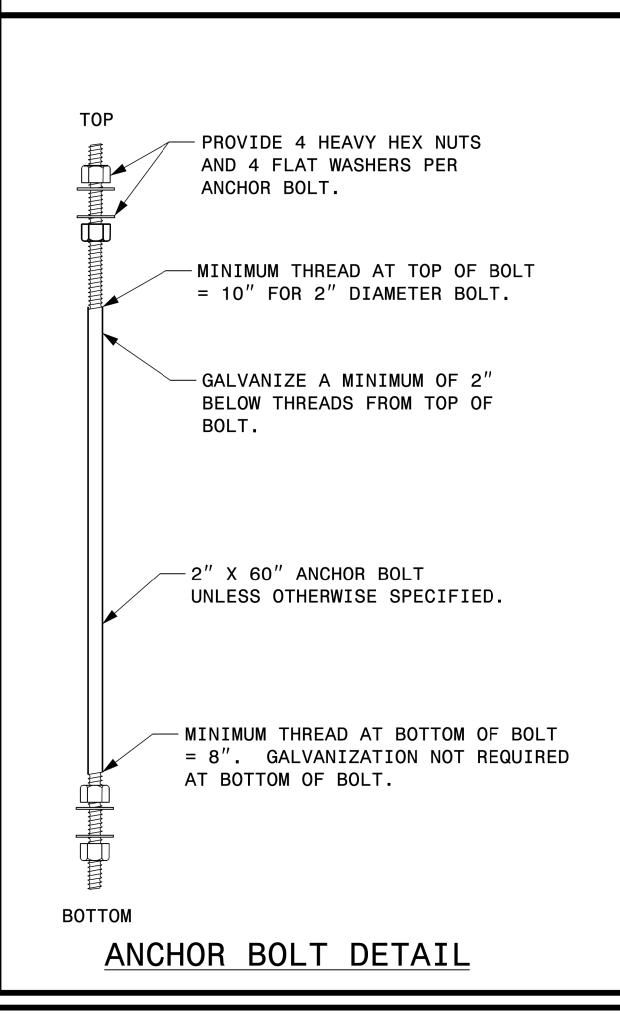

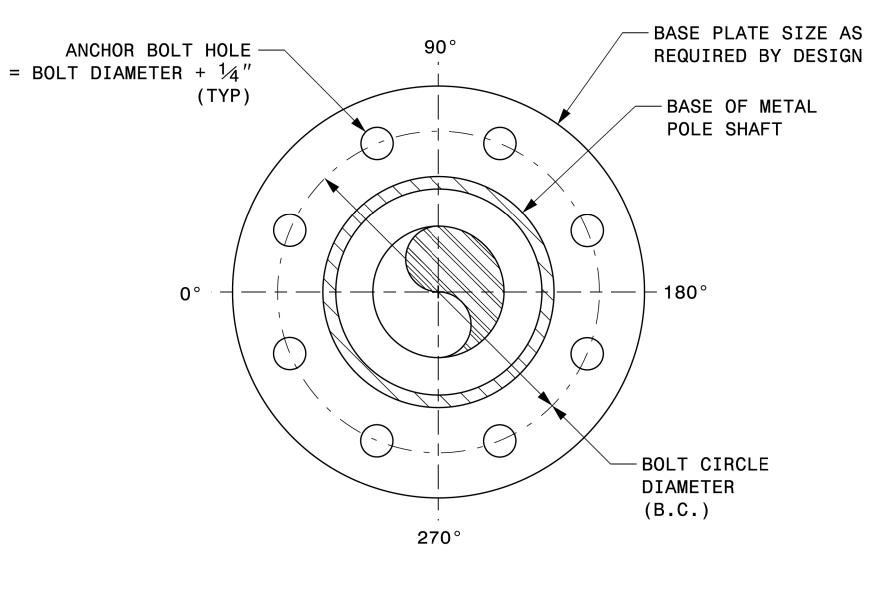

NOTE: BASE PLATE MAY BE CIRCULAR, OCTAGONAL, SQUARE OR RECTANGULAR IN SHAPE.

TYPICAL BASE PLATE DETAIL

Prepared in the Offices of: Nobility one N	Typical Fabrication Details For All Metal Poles	
Sesign s	PLAN DATE: SEPTEMBER 2023 DESIGNED BY: C.F.ANDREWS	
750 N.Greenfield Pkwy.Garner.NC 27529	PREPARED BY: K.C. DURIGON REVIEWED BY: D.C. SARKAR	
SCALE	REVISIONS INIT. DATE	
0 NA		
NONE		

SEAL

SEAL

SEAL

SEAL

O36626

SEAL

O36626

WGINEER

O9/21/2023

SIGNATURE

AD22D CZOD ZZO ADA

etails

abricatio