


APPROVED: *Andrew Klimesek*  
DESIGNED BY: Andrew Klimesek  
 23078984596E44B  
 DATE: 2/1/2024

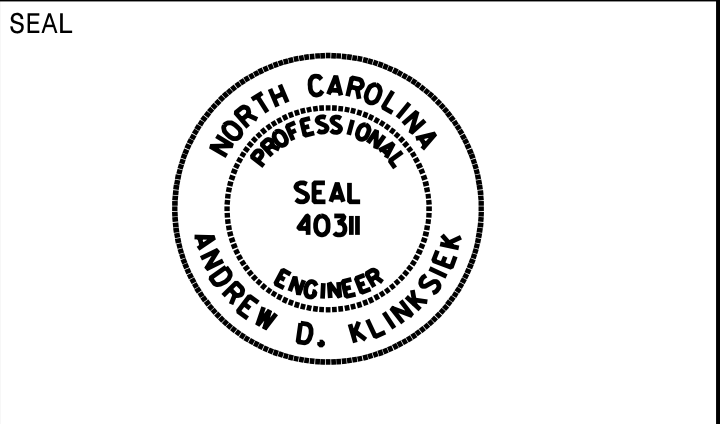

**DOCUMENT NOT CONSIDERED FINAL  
 UNLESS ALL SIGNATURES COMPLETED**

**SIGN NUMBER:** 11C      **BACKG COLOR:** Green/Yellow  
**TYPE:** A (OVHD)      **COPY COLOR:** White/Black  
**QUANTITY:** 1


SYMBOL	X	Y	WID	HT
M1_4	27	101.4	36	36
M1_4	110.7	101.4	36	36
M1_4	236	101.7	36	36
M1_4	319.8	101.7	36	36
Type C Arrow	70	8	32	22
Type A Arrow	196.2	5	22.3	35
Type A Arrow	353.9	5	22.3	35
Vertical Bar	171.9	2	1.5	34
Vertical Bar	171.6	77.7	2	76.3

**SIGN WIDTH:** 34'-0"  
**HEIGHT:** 15'-0"  
**TOTAL AREA:** 510.0 Sq.Ft.

**BORDER TYPE:** VAR.  
**RECESS:** VAR.  
**WIDTH:** VAR.  
**RADII:** VAR.

**NO. Z BARS:** 6  
**LENGTH:** 400.0

**DESIGN BY:** TRT      **CHECKED BY:** NKV  
**PROJECT ID:** I-2513AA/AB      **DIV:** 13      **DATE:** July 2023

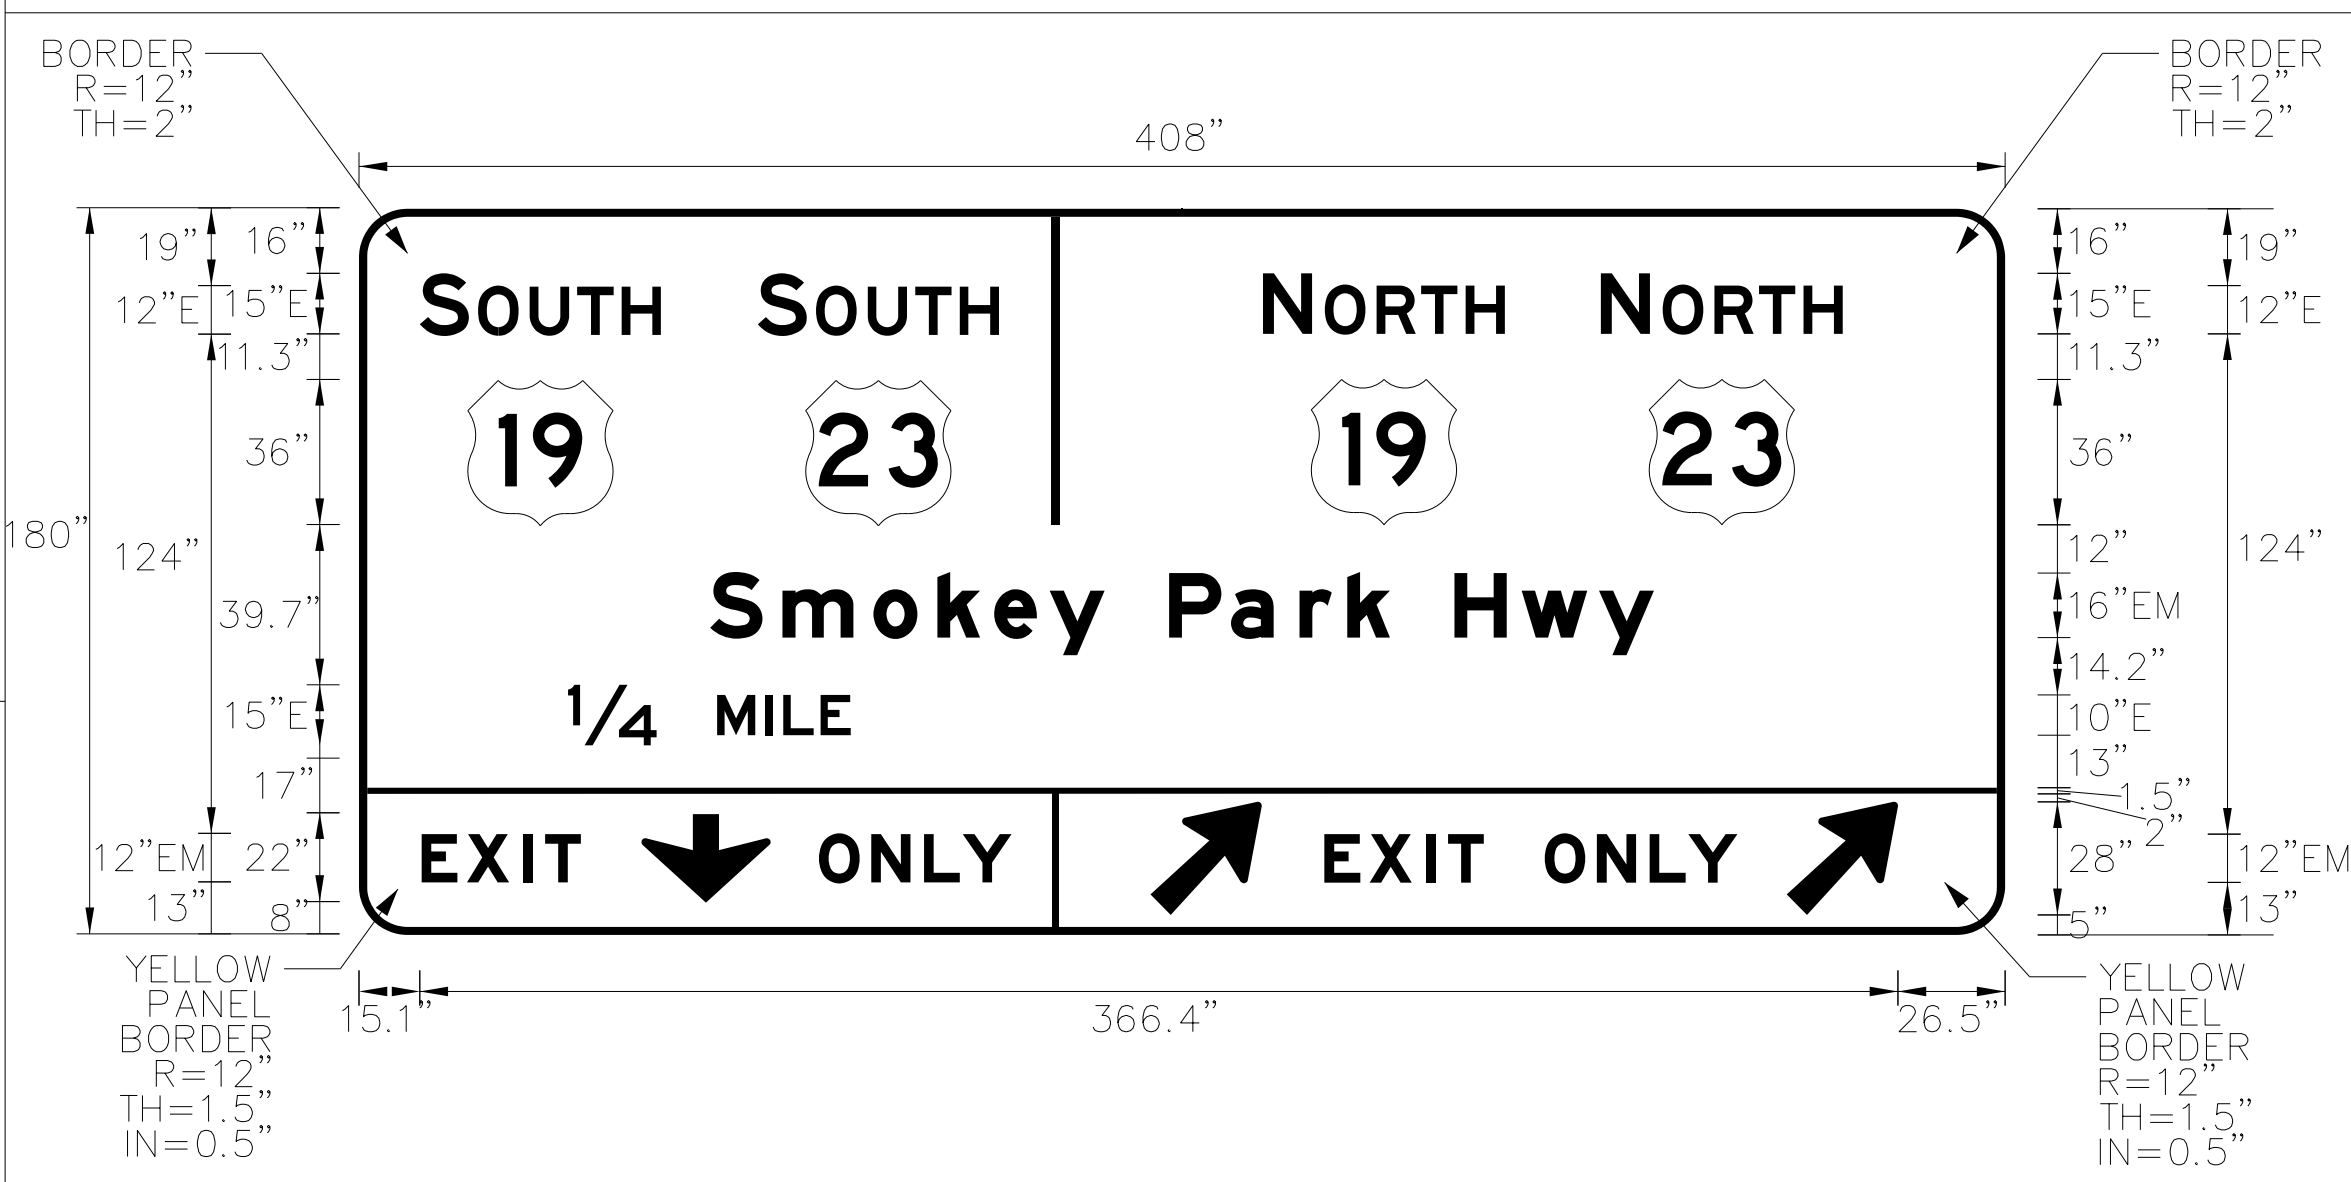

Spacing Factor is 1 unless specified otherwise  
 Spacing Factor for "EXIT" is 1.4

- NOTES:**
- Legend and border shall be direct applied Grade A reflective sheeting.
  - Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
  - Background shall be Grade C reflective sheeting.
  - Bottom panels shall be yellow Grade C sheeting. Legend shall be direct applied black non-reflective sheeting. Arrows shall be black non-reflective sheeting on 0.032" aluminum and demountable. Yellow panel is 408" X 36". (Border Type = Recessed, Recess = 0.5", Width = 1.5", Radii = 12")

**LETTER POSITIONS**

Letter spacings are to start of next letter

		Letter spacings are to start of next letter														Series/Size		
																Text Length		
	S	O	U	T	H													E 2000
	15.1	12.1	2.3	12.8	11.8	11	9.7	333.2										59.8
	S	O	U	T	H													E 2000
	98.8	12.2	2.2	12.8	11.8	11	9.7	249.4										59.8
	N	O	R	T	H													E 2000
	224.1	12.2	3.1	12.8	11	11	9.7	124										59.9
	N	O	R	T	H													E 2000
	307.8	12.2	3.1	12.8	11	11	9.7	40.2										59.9
	S	m	o	k	e	y	P	a	r	k	H	w	y					EM 2000
	87	17.9	22.6	15.8	14.1	13.8	13.6	16	15.4	17	11.8	10.6	16	16.6	19.2	13.6	87	233.9
	1/4	M	I	L	E													E 2000
	51.8	22	15	12	4.4	9.2	7.5	286.1										70.1
	E	X	I	T														EM 2000
	15.5	11.2	14	5.4	8.9	35.3												39.5
	O	N	L	Y														EM 2000
	114	13	13.1	9.6	12.1	246.2												47.8
	E	X	I	T														EM 2000
	239.3	11.2	14	5.4	8.9	129.2												39.5
	O	N	L	Y														EM 2000
	293.9	13	13.1	9.6	12.1	66.4												47.8