


3-20-07

SPI

TIP #: R-2301A
Date: June 30, 2008
Revised Date:

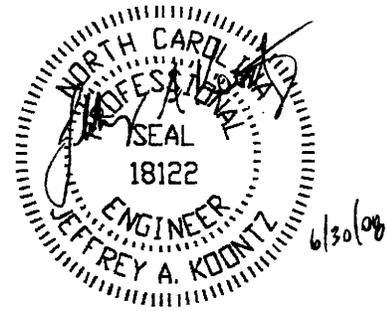

POLICE:

DESCRIPTION

Furnish Police Officers and marked Police Vehicles to direct traffic in accordance with the contract.

CONSTRUCTION METHODS

Use uniformed Police Officers and marked Police Vehicles equipped with police lights mounted on top of the vehicle and police vehicle emblems to direct or control traffic as required by the plans or by the Engineer.


MEASUREMENT AND PAYMENT

Police will be measured and paid for in the actual number of hours that each Police Officer is provided during the life of the project as approved by the Engineer. There will be no direct payment for marked Police Vehicles as they are considered incidental to the pay item.

Payment will be made under:

Pay Item	Pay Unit
Police	Hour

TIP #: R-2301A
 Date: June 30, 2008
 Revised Date:

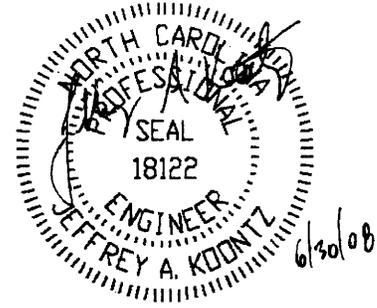

TRAFFIC CONTROL DEVICES TO REMAIN ON PROJECT:

DESCRIPTION

Furnish, install, maintain during the life of the project, and leave Traffic Control Devices on the project at its completion in accordance with the plans and specifications.

CONSTRUCTION METHODS

Install and leave on the project the Traffic Control Devices necessary to accommodate the traffic pattern shown on sheet PMP-05, PMP-06, and PMP-08 of the Traffic Control Plan, unless otherwise directed by the Engineer.

Provide devices to remain on the project, which meet the requirements of their respective specifications in the 2006 Standard Specifications or their respective special provisions.

Provide devices to remain on the project that are in good condition and subject to the approval of the Engineer.

The devices required to remain on the project at its completion will become the property of the Department.

BASIS OF PAYMENT

No additional payment will be made specifically for leaving devices on the project. These devices will be paid under their respective pay items in the Contract which will include full compensation for furnishing, installing, maintaining during the life of the project, and leaving the devices on the project at its completion.