



### LOCATION SKETCH

INFORMATION INDICATED ON THE LOCATION SKETCH SHALL BE CONSIDERED GENERAL INFORMATION ONLY. CONTRACTOR SHALL CONFIRM, THROUGH OTHER SOURCES, SPECIFIC INFORMATION REGARDING BRIDGES, ROADWAY, UTILITIES, THE SURROUNDING AREA, AND ANY OTHER ASPECTS THAT MAY BE NECESSARY TO PERFORM AND COMPLETE THE PROJECT.

### BRIDGE COORDINATES

LATITUDE	LONGITUDE
34°-20'-56.86"	78°-39'-29.54"

### GENERAL NOTES

SEE CONTRACT DOCUMENTS FOR LANE WIDTHS, SEQUENCING AND OTHER TRAFFIC CONTROL MEASURES FOR STAGING OF OVERLAY SURFACE PREPARATION AND POLYMER CONCRETE (PC) PLACEMENT.

THE CONTRACTOR'S ATTENTION IS CALLED TO THE FACT THAT DUE TO THE NATURE OF PRESERVATION PROJECTS, THE EXTENT OF WORK CANNOT ALWAYS BE ACCURATELY DETERMINED PRIOR TO COMMENCEMENT OF WORK. REPAIR LOCATIONS AND ESTIMATES OF QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIR.

EXISTING DIMENSIONS AND BRIDGE CONDITION ARE FROM THE BEST INFORMATION AVAILABLE. THE CONTRACTOR SHALL FIELD VERIFY THE INFORMATION SHOWN ON THE PLANS AND NOTIFY THE ENGINEER IF ACTUAL DIMENSIONS AND CONDITIONS DIFFER.

THE CONTRACTOR SHALL HAVE NO CLAIM WHATSOEVER AGAINST THE DEPARTMENT FOR ANY DELAYS OR ADDITIONAL COST INCURRED BASED ON DIFFERENCES BETWEEN WHAT IS SHOWN ON THE PLANS AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO FOLLOW ALL STATE AND FEDERAL SAFETY REQUIREMENTS.

WORK ON THE BRIDGE SHALL BE PERFORMED SO AS NOT TO ALLOW DEBRIS TO FALL BELOW, EXCEPT WHERE THE CONTRACTOR'S PLAN USED PLATFORMS, NETS, SCREEN OR OTHER PROTECTIVE DEVICES TO CATCH THE MATERIAL. THE CONTRACTOR SHALL SUBMIT PLANS FOR CONSTRUCTION IN ACCORDANCE WITH ARTICLE 402-2 OF THE STANDARD SPECIFICATIONS AND THE PROJECT SPECIAL PROVISIONS. ANY DAMAGE TO EXISTING REINFORCING STEEL DURING CONTRACTOR'S OPERATIONS SHALL BE REPAIRED AS DIRECTED BY THE ENGINEER AND PERFORMED AT NO ADDITIONAL COST TO THE DEPARTMENT.

FOR CONTROL OF TRAFFIC AND LIMITS OF PHASING OF CONSTRUCTION, SEE CONTRACT DOCUMENTS.

PRIOR TO BEGINNING WORK, THE CONTRACTOR SHALL SUBMIT FOR REVIEW AND APPROVAL A COMPLETE SEQUENCE OF TASKS FOR EACH OPERATION AFFECTING THE BRIDGE SURFACE AND/OR TRAFFIC.

FOR OTHER DESIGN DATA AND GENERAL NOTES, SEE SHEET SN.

FOR FALSEWORK AND FORMWORK, SEE SPECIAL PROVISIONS.

FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.

FOR CRANE SAFETY, SEE SPECIAL PROVISIONS.

FOR GROUT FOR STRUCTURES, SEE SPECIAL PROVISIONS.

ALL PAVEMENT MARKING WILL BE IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.

EXISTING JOINTS AND DECK DRAINS SHALL BE SEALED PRIOR TO BEGINNING SURFACE PREPARATIONS OF THE BRIDGE DECK. THE CONTRACTOR SHALL TAKE CARE THAT ANY CONSTRUCTION DEBRIS THAT COLLECTS IN THE DRAINS IS CONTAINED. DRAINS IN SHOULDERS OF ADJACENT TRAVEL LANES SHALL BE KEPT FREE AND CLEAR OF DEBRIS.

LONGITUDINAL CONSTRUCTION JOINTS OF OVERLAYS SHALL BE LOCATED ALONG THE CENTERLINE OR EDGE OF TRAVEL LANES.

FOR SCARIFYING BRIDGE DECK, SHOTBLASTING BRIDGE DECK AND CLASS II SURFACE PREPARATION, SEE OVERLAY SURFACE PREPARATION FOR POLYMER CONCRETE SPECIAL PROVISION.

FOR CONCRETE DECK REPAIR FOR PC OVERLAY, PC MATERIALS, AND PLACING AND FINISHING PC OVERLAY, SEE POLYMER CONCRETE BRIDGE DECK OVERLAY SPECIAL PROVISION.

FOR POLLUTION CONTROL AND PAINTING CONTAINMENT, SEE PAINTING EXISTING WEATHERING STEEL STRUCTURE SPECIAL PROVISIONS.


FOR PAINTING EXISTING WEATHERING STEEL STRUCTURE, SEE SPECIAL PROVISIONS.

FOR EXPANSION JOINT SEAL REPAIR, SEE SPECIAL PROVISIONS.

FOR FOAM JOINT SEALS FOR PRESERVATION, SEE SPECIAL PROVISIONS.

PROJECT NO. **HI-0018**  
**COLUMBUS** COUNTY  
BRIDGE NO. **230381**

SHEET 2 OF 2

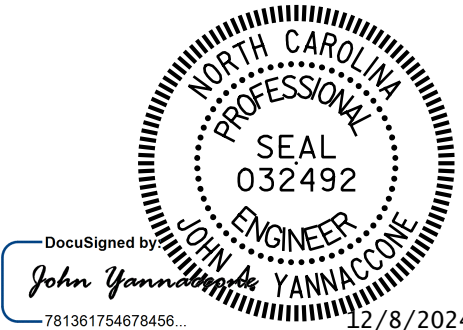

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

**GENERAL DRAWING**  
FOR BRIDGE ON  
US 74 - US 76 BYP EBL  
OVER SR 1700 (RED HILL ROAD)

DRAWN BY : **R.L.PUTEK** DATE : **08/2024**  
CHECKED BY : **J.A.YANNACCONE** DATE : **08/2024**




One Glenwood Avenue  
Suite 900  
Raleigh, NC 27603  
919-420-7660  
NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S3-02 TOTAL SHEETS 79
2			4			



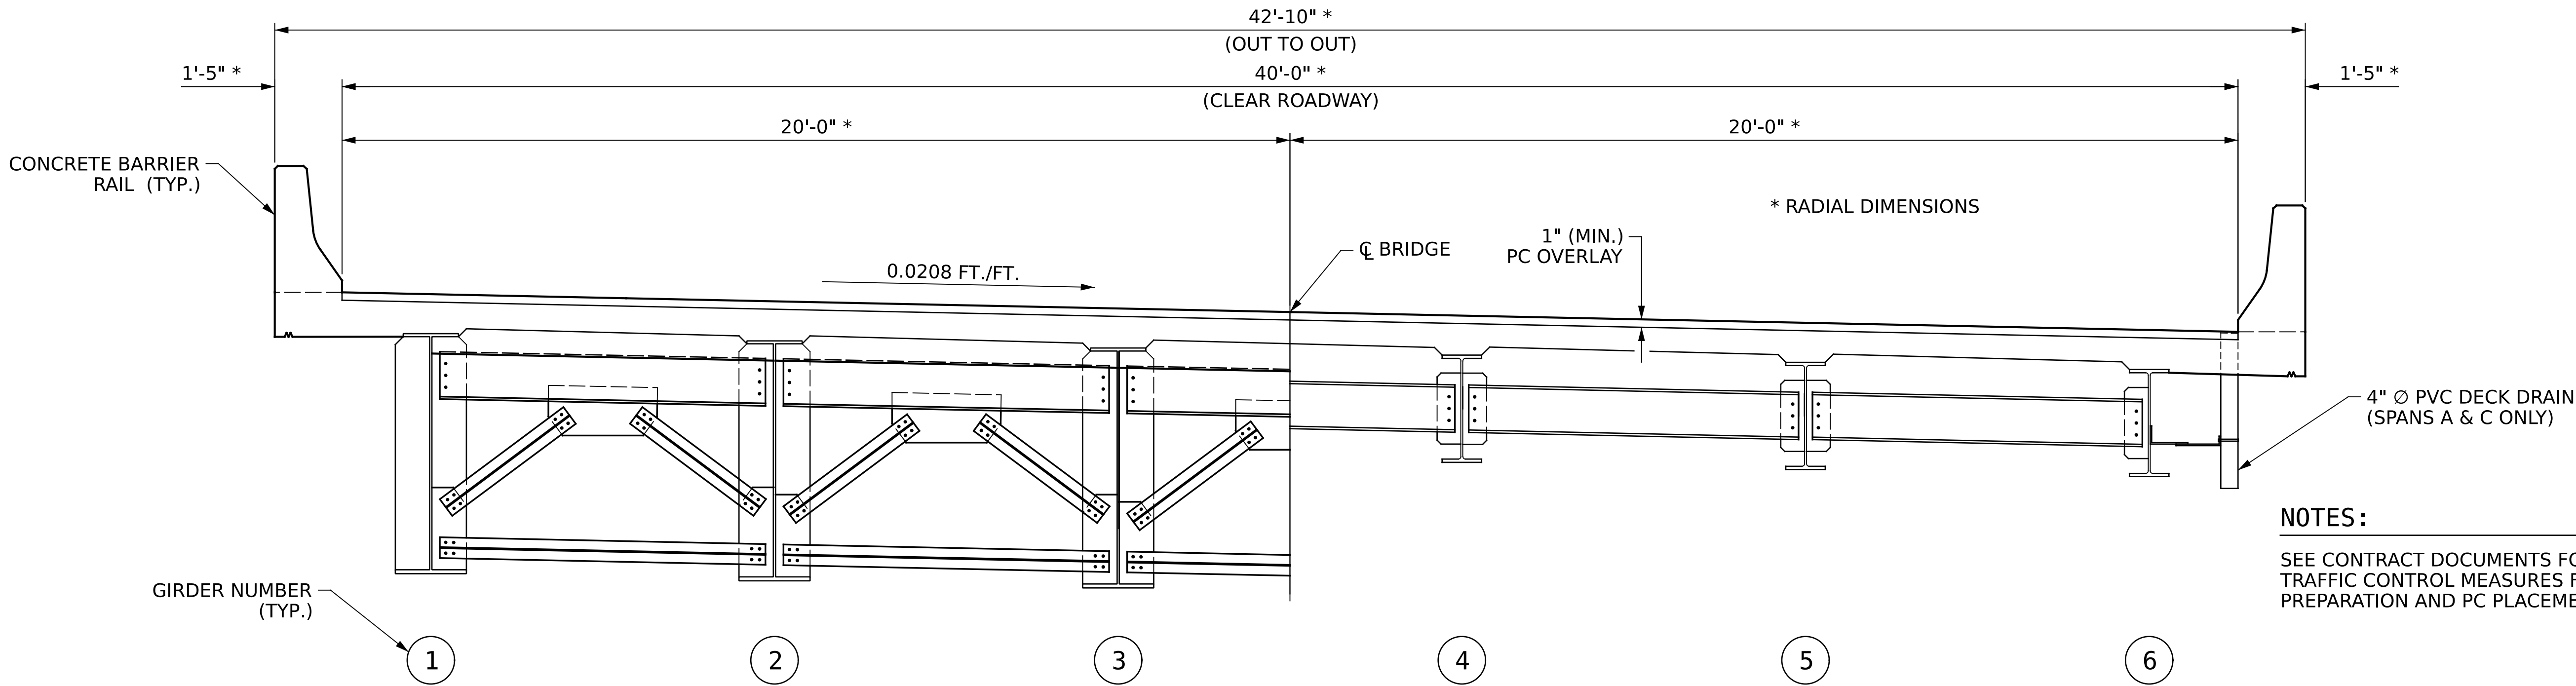


NOTES:  
SEE CONTRACT DOCUMENTS FOR LANE WIDTHS, SEQUENCING AND OTHER TRAFFIC CONTROL MEASURES FOR STAGING OF OVERLAY SURFACE PREPARATION AND PC PLACEMENT.


HALF SECTION THRU SPANS A, B AND C  
(SHOWING BENT CROSSFRAMES)

HALF SECTION THRU SPANS A AND C  
(SHOWING INTERMEDIATE DIAPHRAGMS)

**TYPICAL SECTION**  
(PROPOSED)

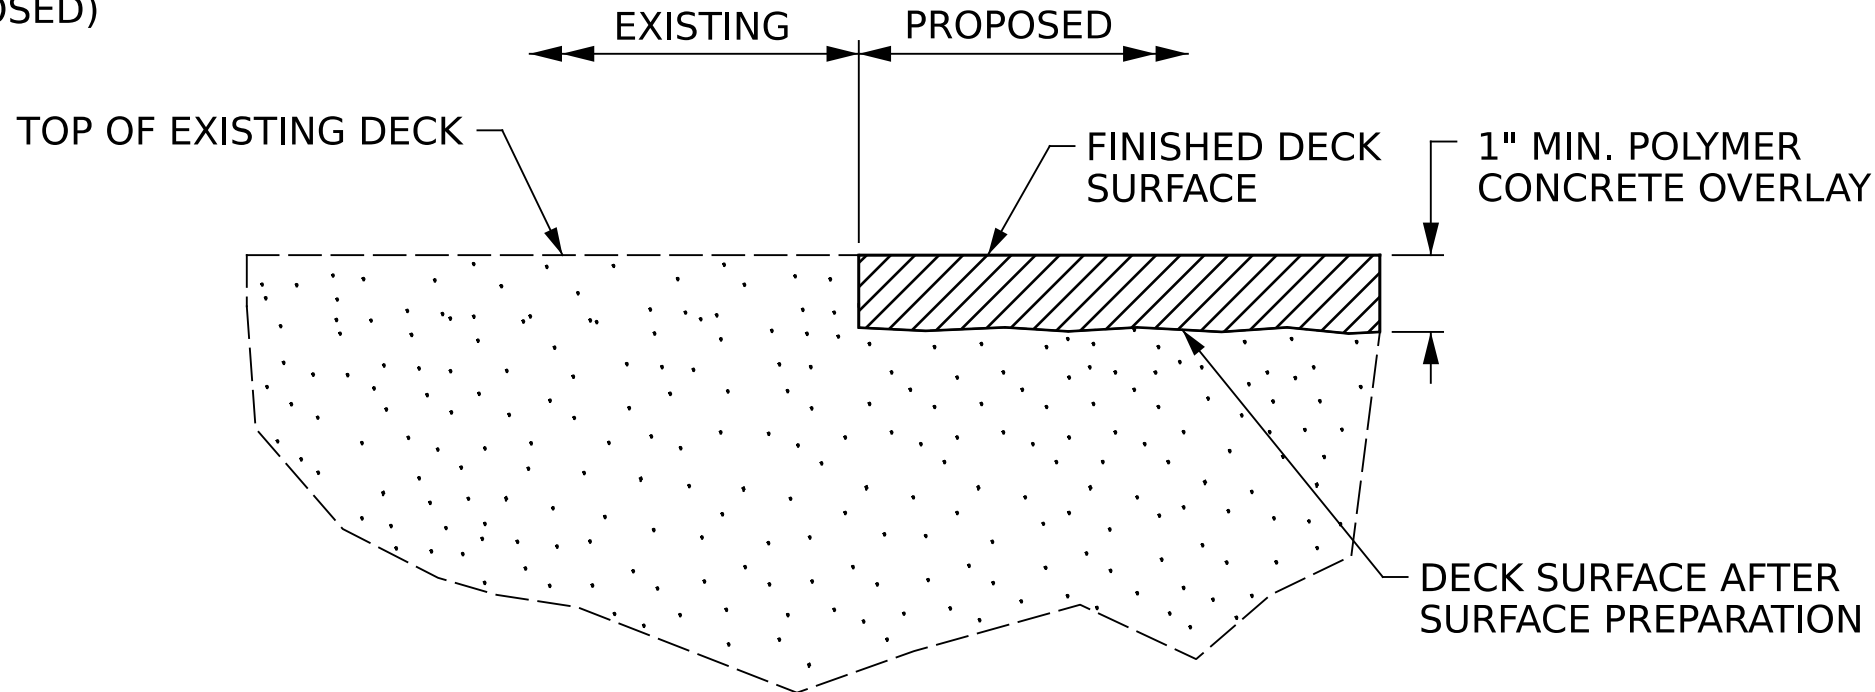


**DETAIL FOR  
POLYMER CONCRETE (PC) OVERLAY**

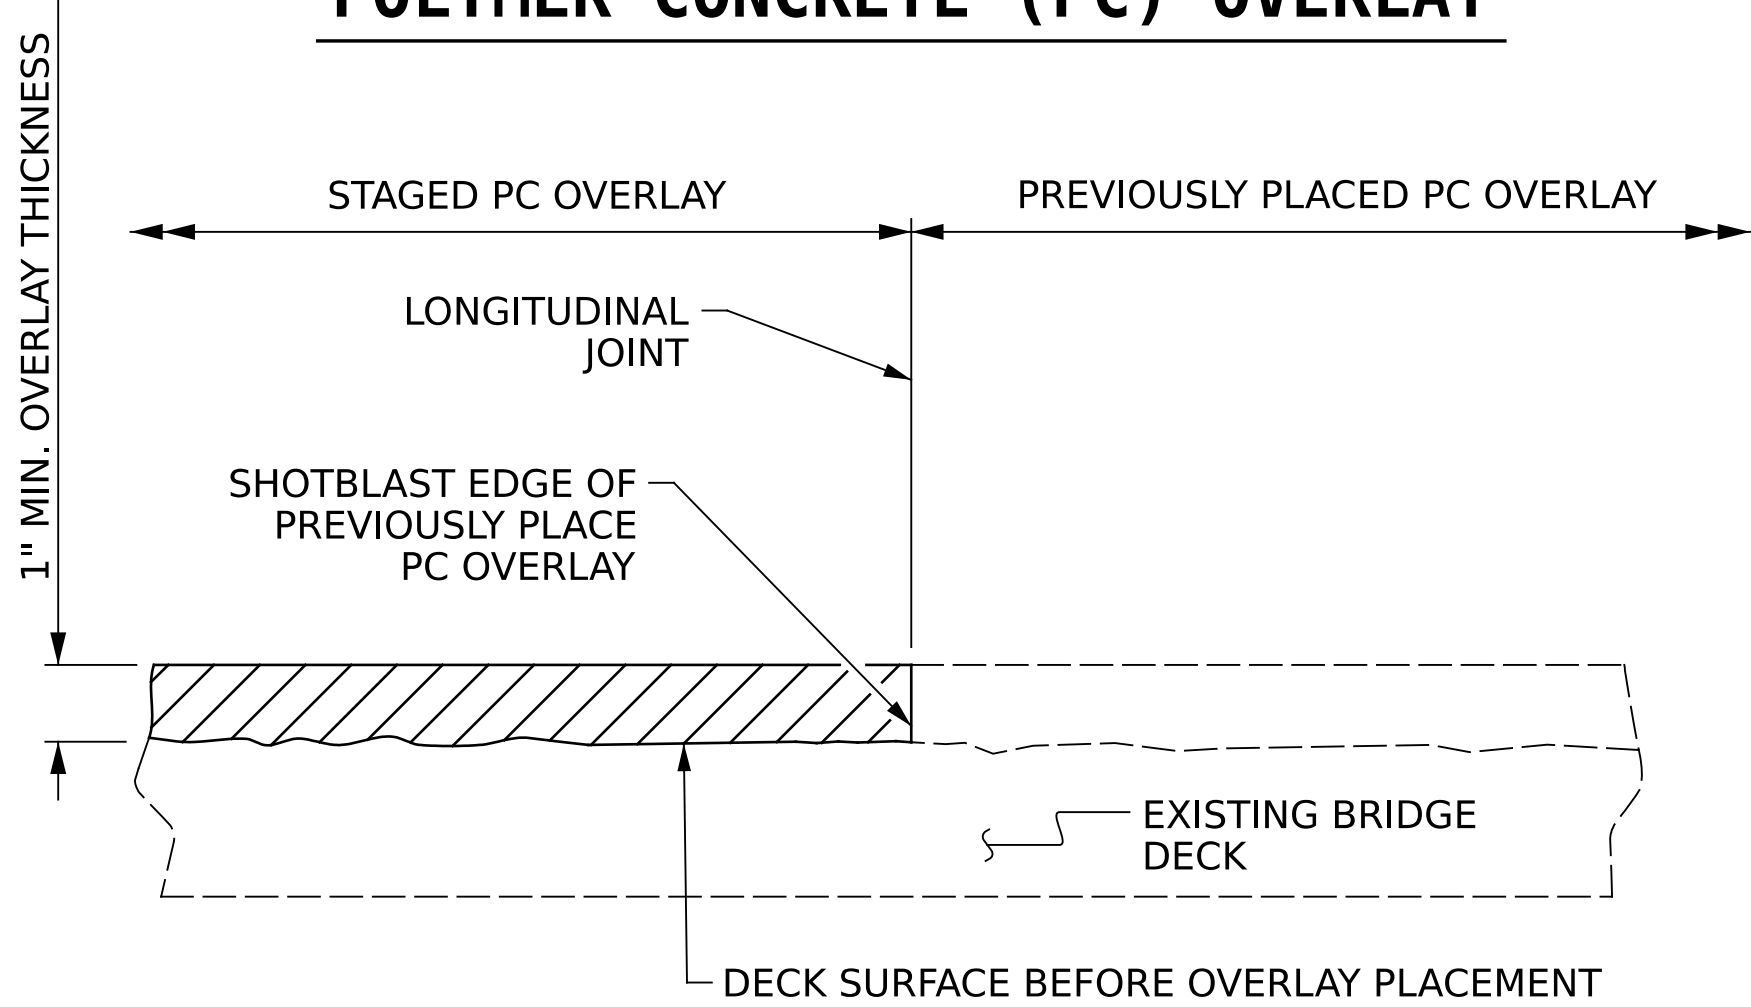


**STAGED PC OVERLAY CONSTRUCTION JOINT**

LIMITS OF SCARIFICATION, CONCRETE DECK REPAIR FOR PC OVERLAY, PC MATERIALS, PLACING AND FINISHING PC OVERLAY, CLASS II SURFACE PREPARATION, AND SHOTBLASTING BRIDGE DECK (SEE DECK REPAIR SHEETS)

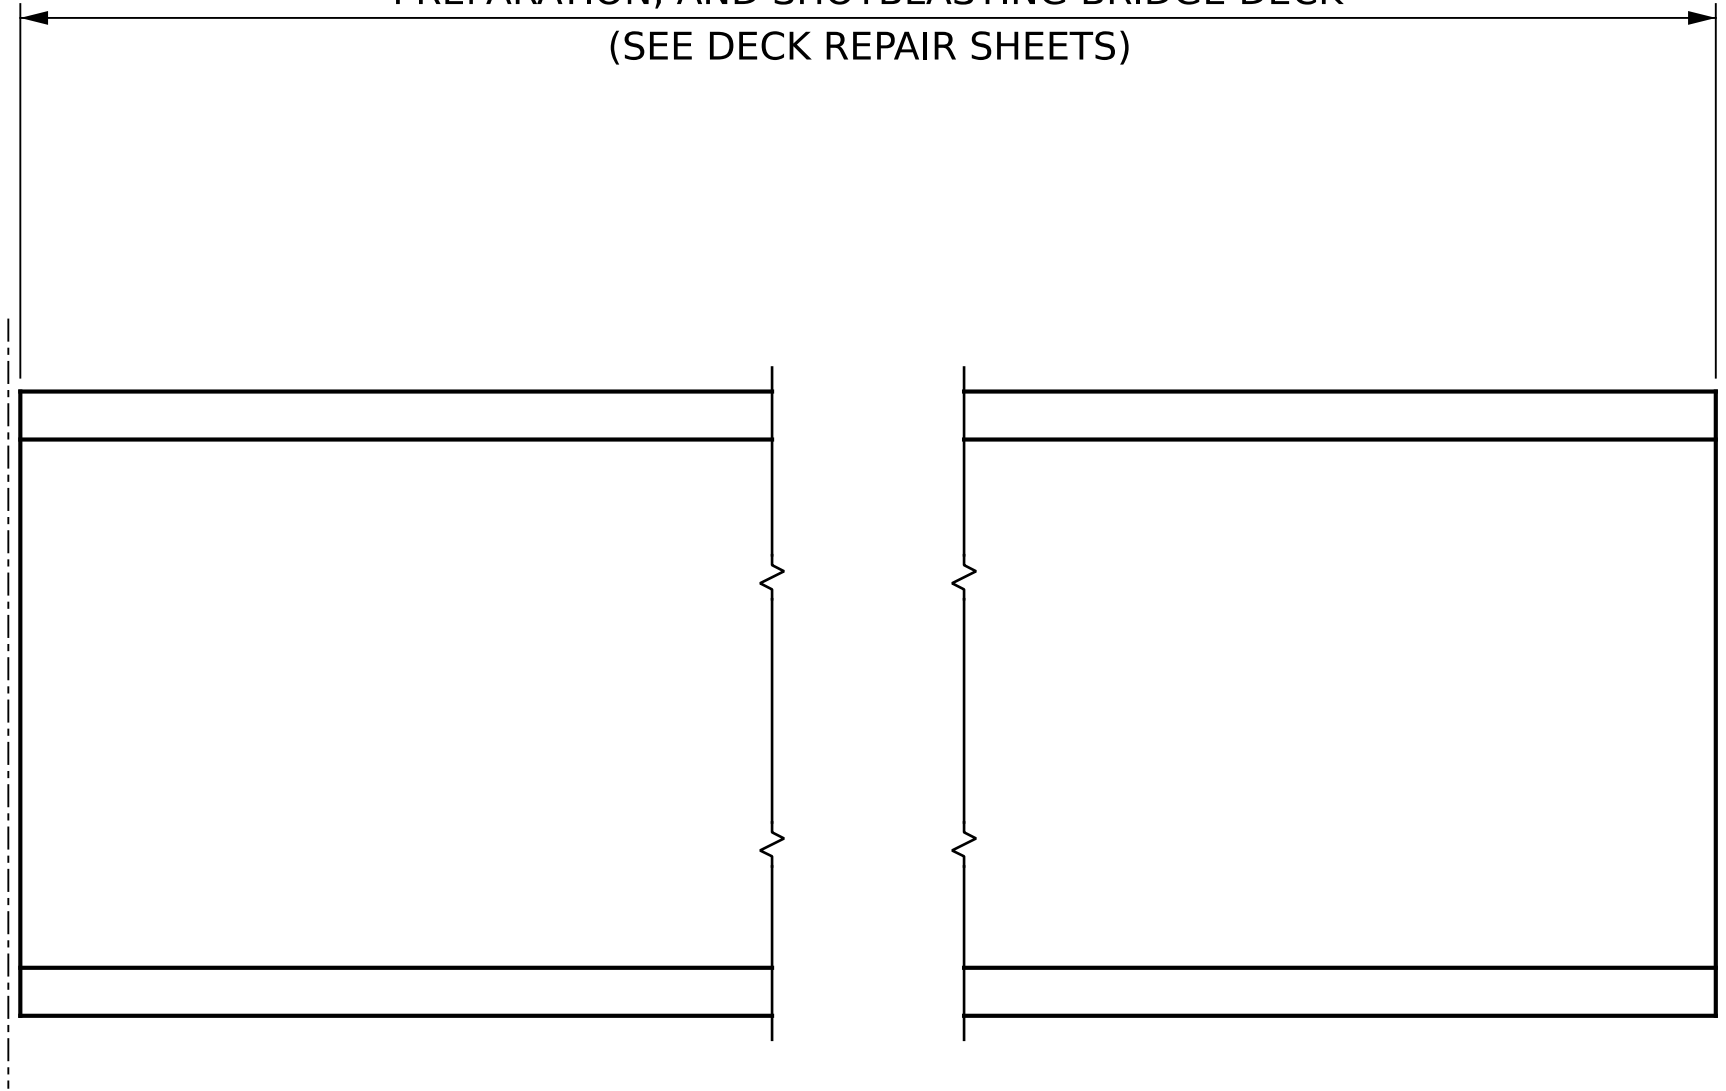

PLAN

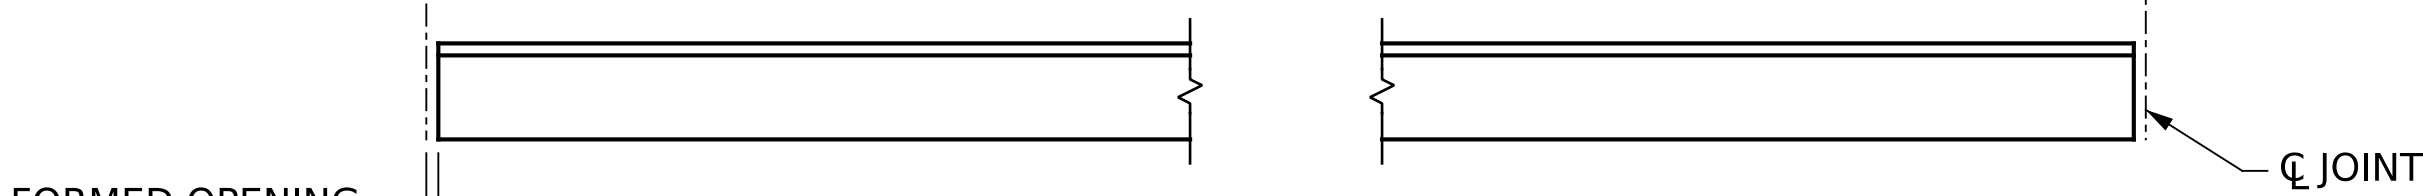


ELEVATION

**PAY LIMITS FOR OVERLAY BID ITEMS**

PROJECT NO. **HI-0018**  
**COLUMBUS** COUNTY  
BRIDGE NO. **230381**

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

**TYPICAL SECTION AND  
SURFACE PREPARATION  
DETAILS**

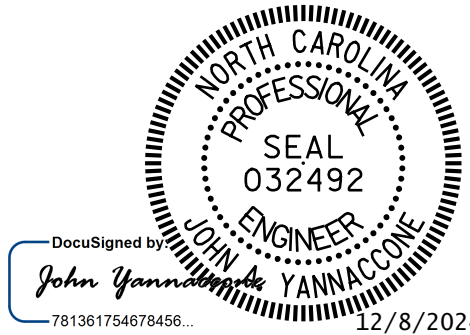


DRAWN BY : **R.L. PUTEK** DATE : **08/2024**  
CHECKED BY : **J.A. YANNACCONI** DATE : **08/2024**



One Glenwood Avenue  
Suite 900  
Raleigh, NC 27603  
919-420-7660  
NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S3-03
2			4			
TOTAL SHEETS						79

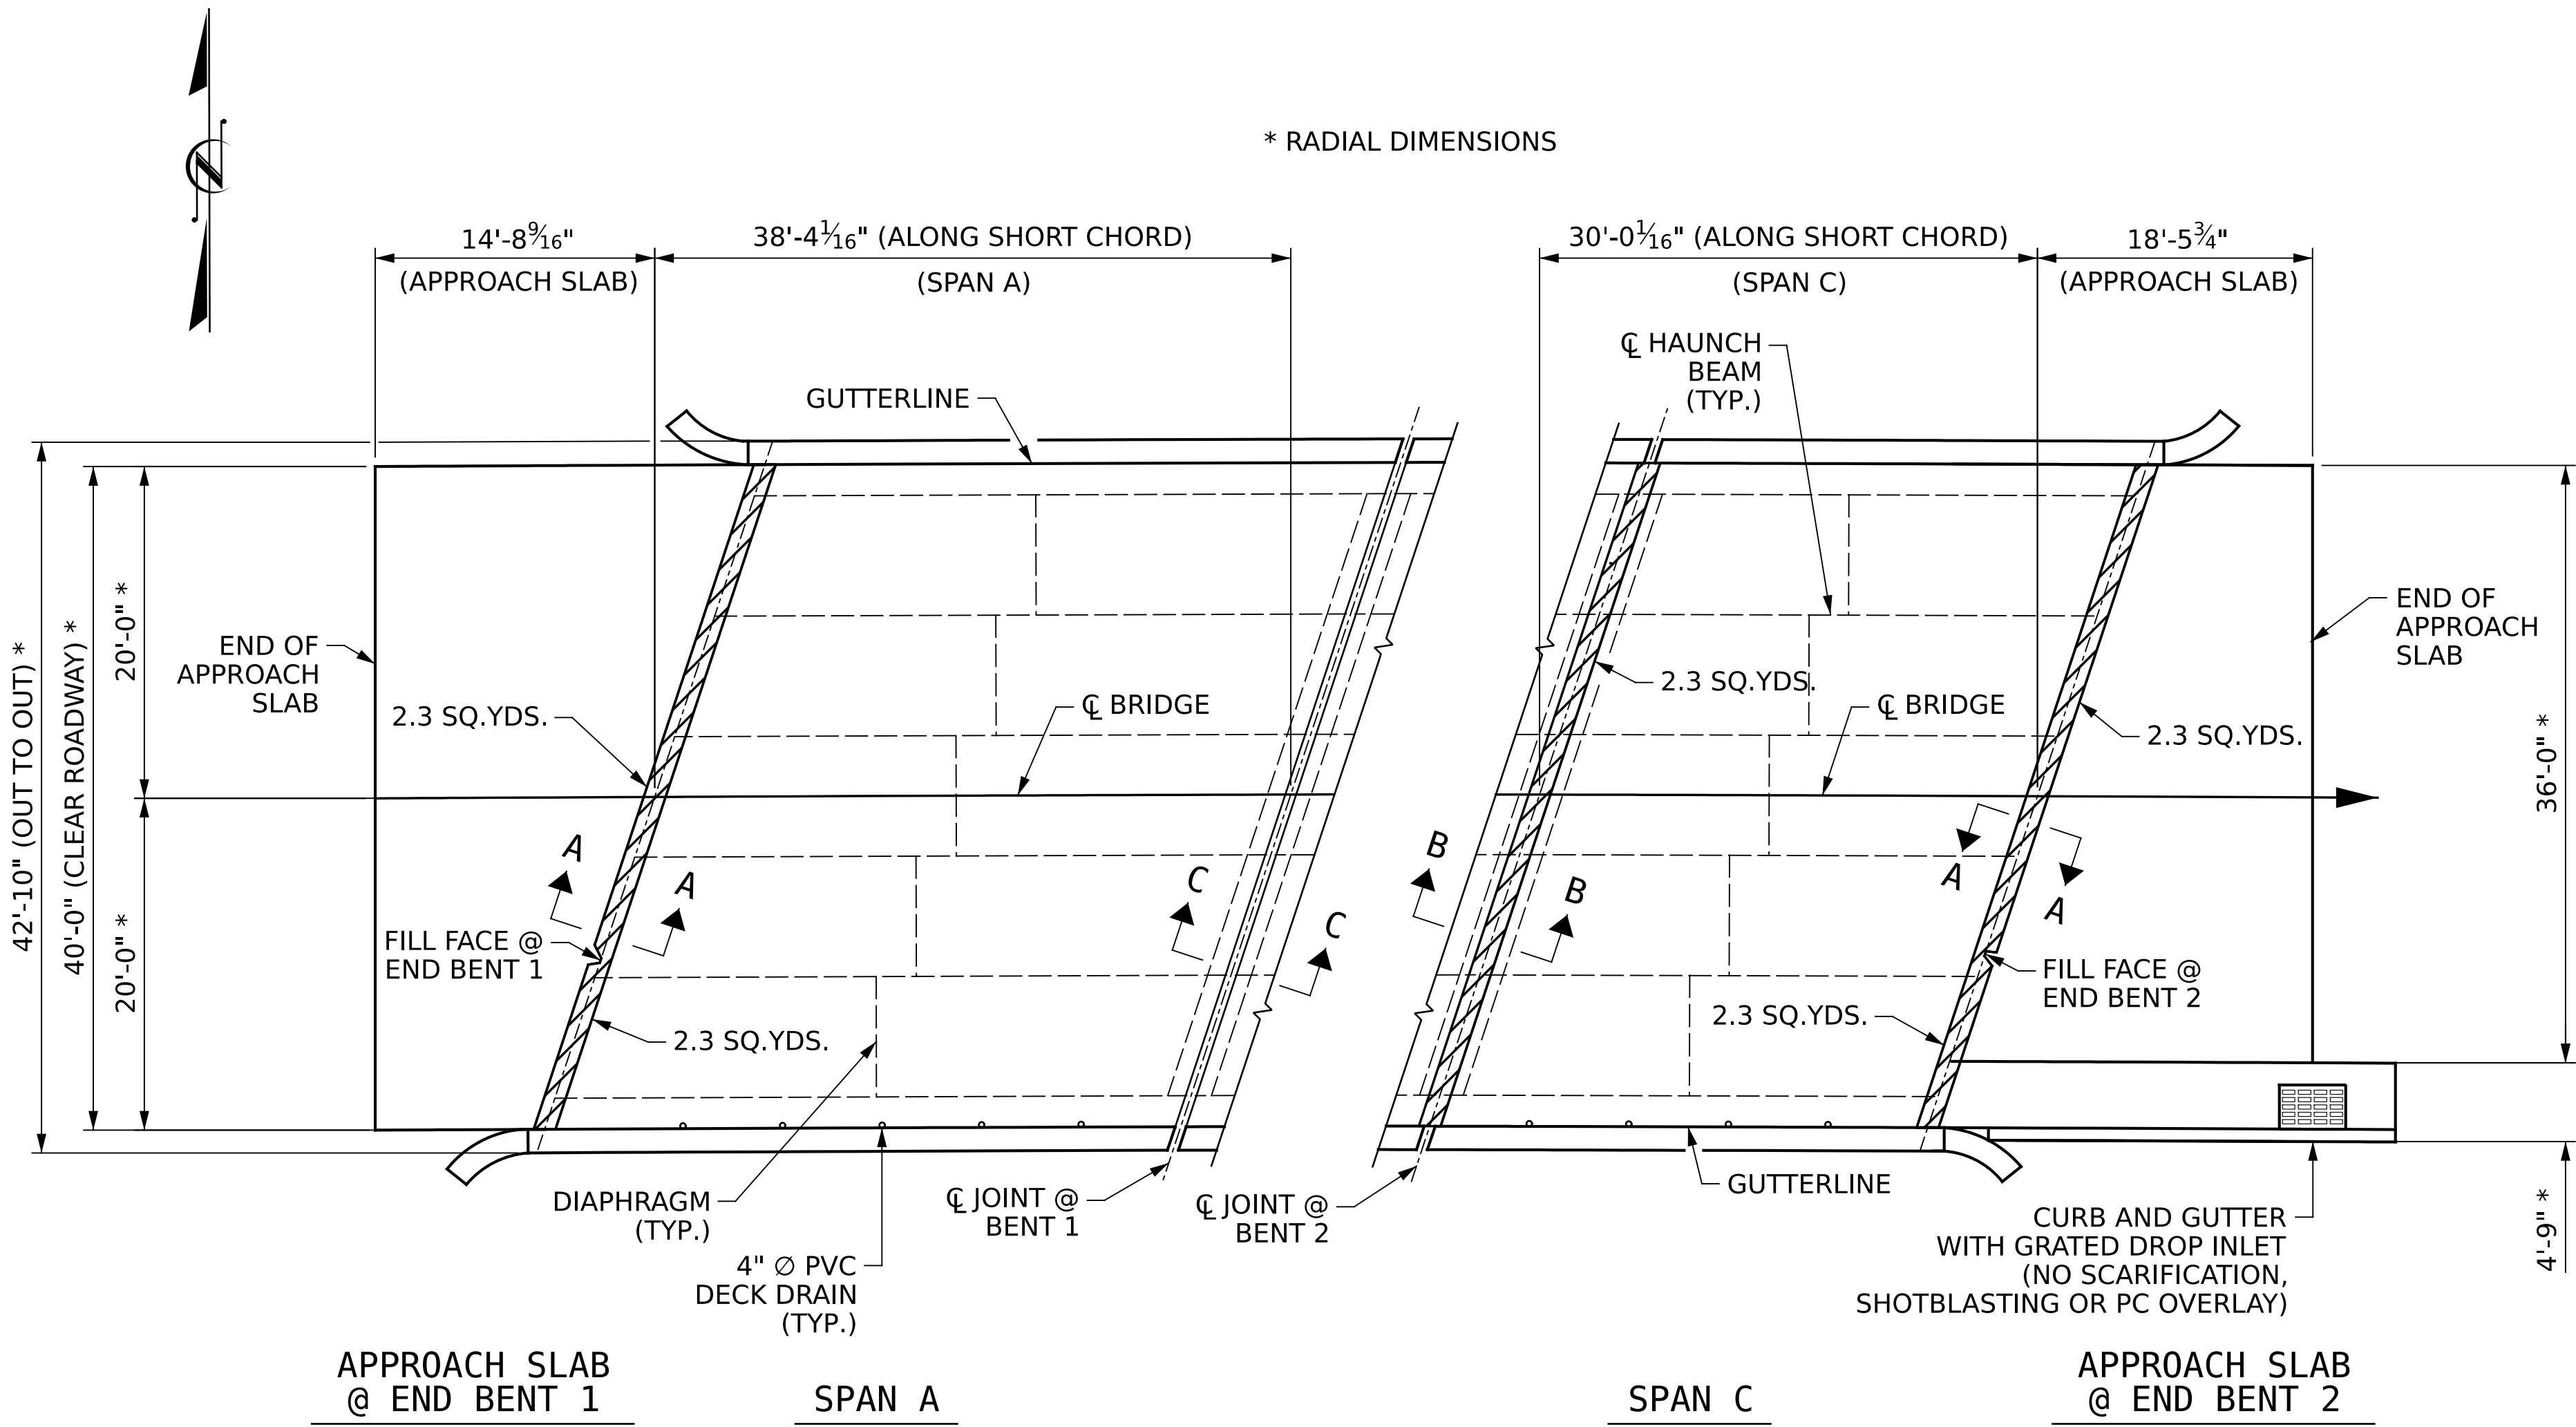

PLAN

NOTES

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE REPAIR QUANTITY TABLE.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE YARDS OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK, SEE OVERLAY SURFACE PREPARATION FOR POLYMER CONCRETE SPECIAL PROVISION.


CONCRETE COVER FOR TOP BARS IN DECK SLAB IS 1 1/2" PER EXISTING BRIDGE PLANS.

FOR SECTION A-A AND B-B, SEE "FOAM JOINT SEAL DETAILS" SHEET.

FOR SECTION C-C, SEE "EXPANSION JOINT SEAL DETAILS" SHEET.

AS-BUILT QUANTITY REPAIR TABLE					
DECK UNDERSIDE REPAIR					
SHOTCRETE REPAIRS		ESTIMATE		ACTUAL	
		AREA SF	VOLUME CF	AREA SF	VOLUME CF
UNDERSIDE OF DECK	SPAN A	0.0	0.0		
	SPAN C	0.0	0.0		
INTERIOR DIAPHRAGMS	SPAN A	0.0	0.0		
	SPAN C	0.0	0.0		
OVERHANG DIAPHRAGMS	SPAN A	0.0	0.0		
	SPAN C	0.0	0.0		
UNDERSIDE OF OVERHANG	SPAN A	0.0	0.0		
	SPAN C	0.0	0.0		
		ESTIMATE		ACTUAL	
UNDERSIDE EPOXY RESIN INJECTION	SPAN A	0.0 LIN.FT.			
	SPAN C	0.0 LIN.FT.			

- SCARIFICATION AND SHOTBLASTING OF BRIDGE DECK
- CLASS II SURFACE PREPARATION
- UNDERSIDE OF DECK SHOTCRETE REPAIRS

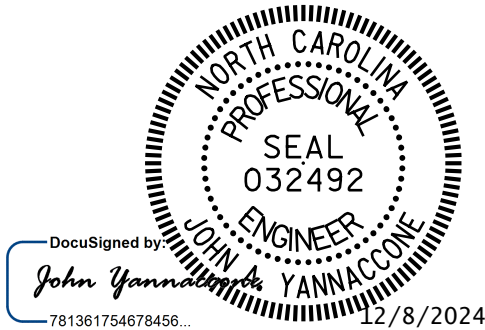


PROJECT NO. **HI-0018**  
**COLUMBUS** COUNTY  
BRIDGE NO. **230381**

SHEET 1 OF 2

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH  
**DECK REPAIRS**  
SPAN A W/ APPROACH SLAB &  
SPAN C W/ APPROACH SLAB



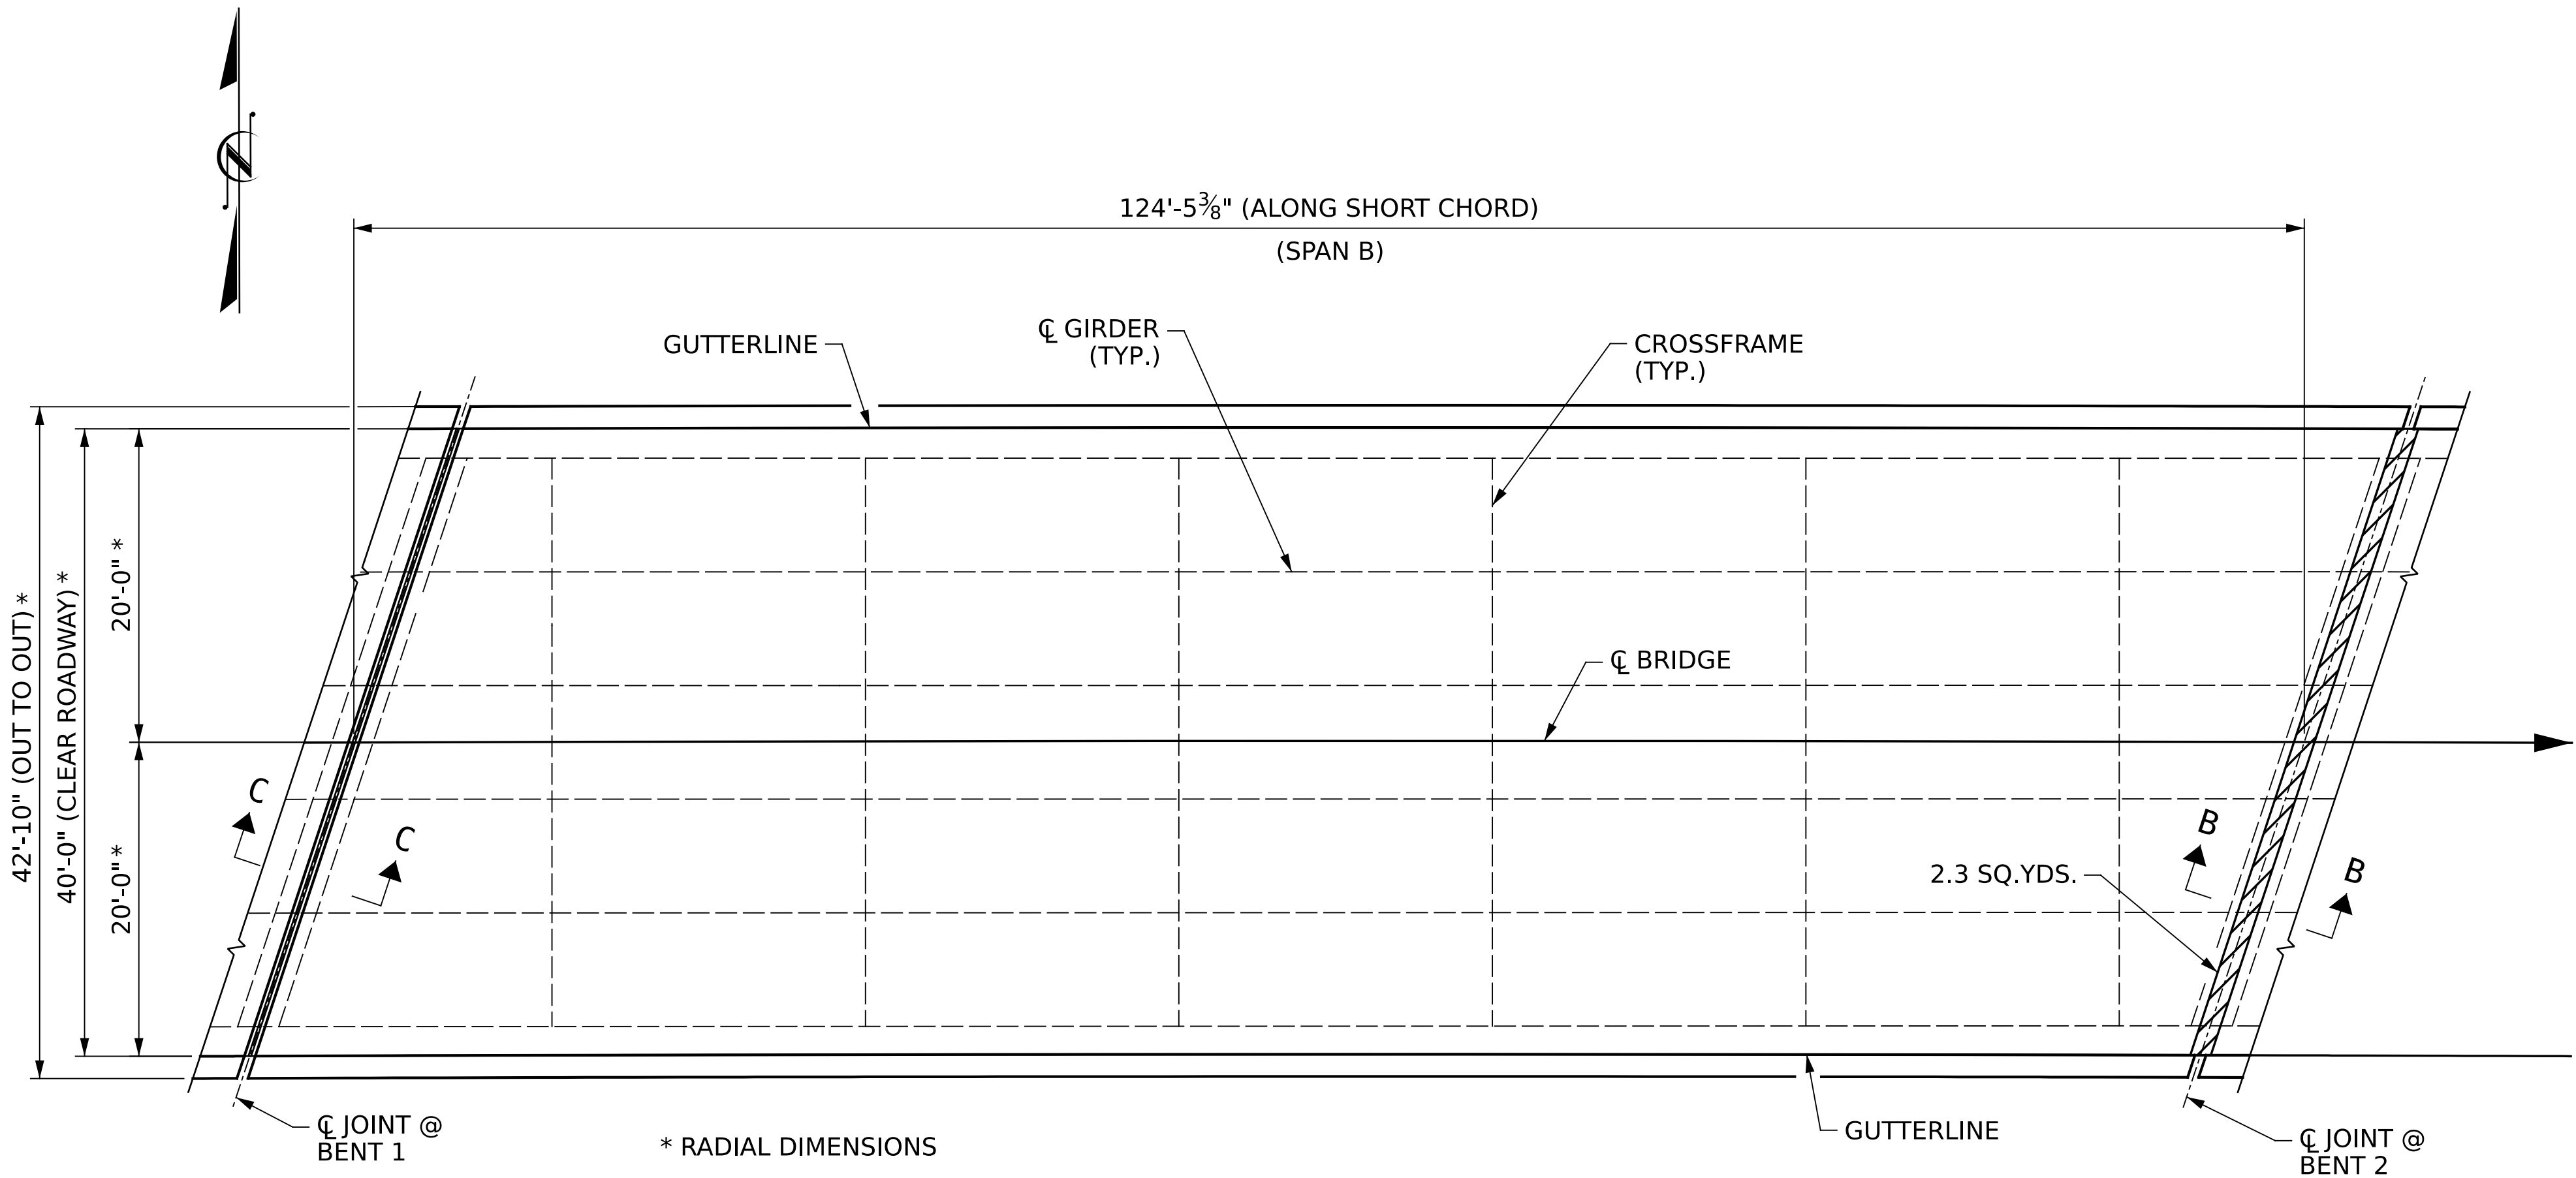

SPAN B

PLAN

NOTES

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE REPAIR QUANTITY TABLE.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE YARDS OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK, SEE OVERLAY SURFACE PREPARATION FOR POLYMER CONCRETE SPECIAL PROVISION.

CONCRETE COVER FOR TOP BARS IN DECK SLAB IS 1½" PER EXISTING BRIDGE PLANS.

FOR SECTION B-B, SEE "FOAM JOINT SEAL DETAILS" SHEET.

FOR SECTION C-C, SEE "EXPANSION JOINT SEAL DETAILS" SHEET.

AS-BUILT QUANTITY REPAIR TABLE




DECK SURFACE REPAIR - SPAN B

	ESTIMATE	ACTUAL
SCARIFIYING BRIDGE DECK	551.1 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	551.1 SQ. YDS.	
CLASS II SURFACE PREPARATION	2.3 SQ. YDS.	
PC MATERIALS	19.1 CU. YDS.	
PLACING AND FINISHING PC OVERLAY	551.1 SQ. YDS.	
GROOVING BRIDGE FLOORS	4557 SQ. FT.	

DECK UNDERSIDE REPAIR - SPAN B


SHOTCRETE REPAIRS	ESTIMATE		ACTUAL	
	AREA SF	VOLUME CF	AREA SF	VOLUME CF
UNDERSIDE OF DECK	0.0	0.0		
INTERIOR DIAPHRAGMS	0.0	0.0		
OVERHANG DIAPHRAGMS	0.0	0.0		
UNDERSIDE OF OVERHANG	0.0	0.0		

	ESTIMATE	ACTUAL
UNDERSIDE EPOXY RESIN INJECTION	0.0 LIN.FT.	

-  SCARIFICATION AND SHOTBLASTING OF BRIDGE DECK
-  CLASS II SURFACE PREPARATION
-  UNDERSIDE OF DECK SHOTCRETE REPAIRS

PROJECT NO. **HI-0018**  
**COLUMBUS** COUNTY  
BRIDGE NO. **230381**

SHEET 2 OF 2

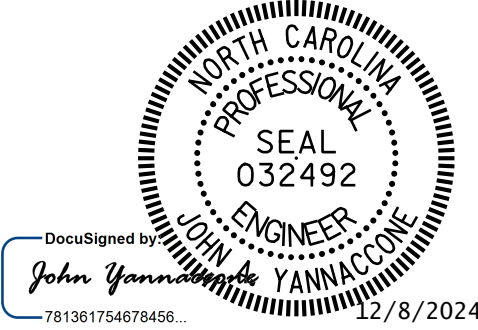

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

DECK REPAIRS  
SPAN B

DRAWN BY : R.L.PUTEK DATE : 08/2024  
CHECKED BY : J.A.YANNACCONE DATE : 08/2024




One Glenwood Avenue  
Suite 900  
Raleigh, NC 27603  
919-420-7660  
NC Lic. No. F-0270


DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S3-05 TOTAL SHEETS 79
2			4			




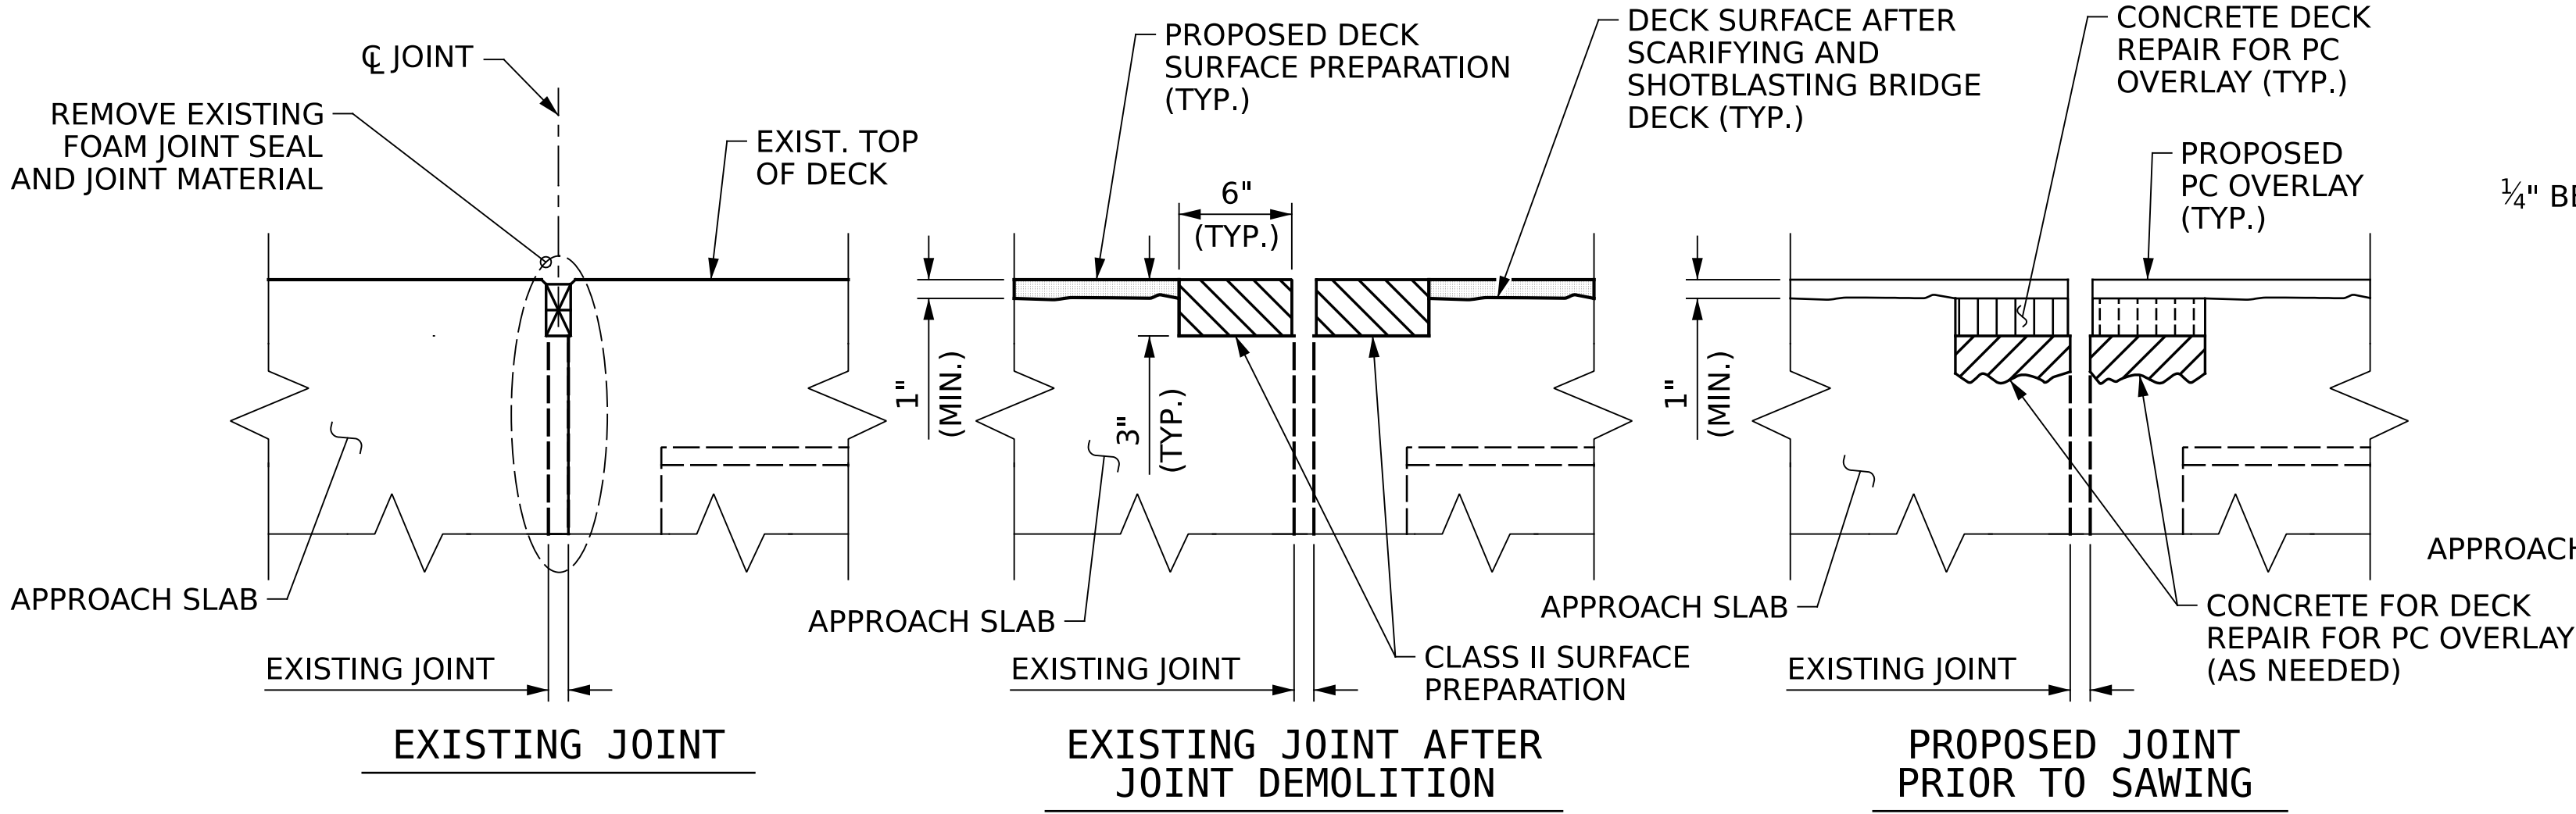


SECTION A-A

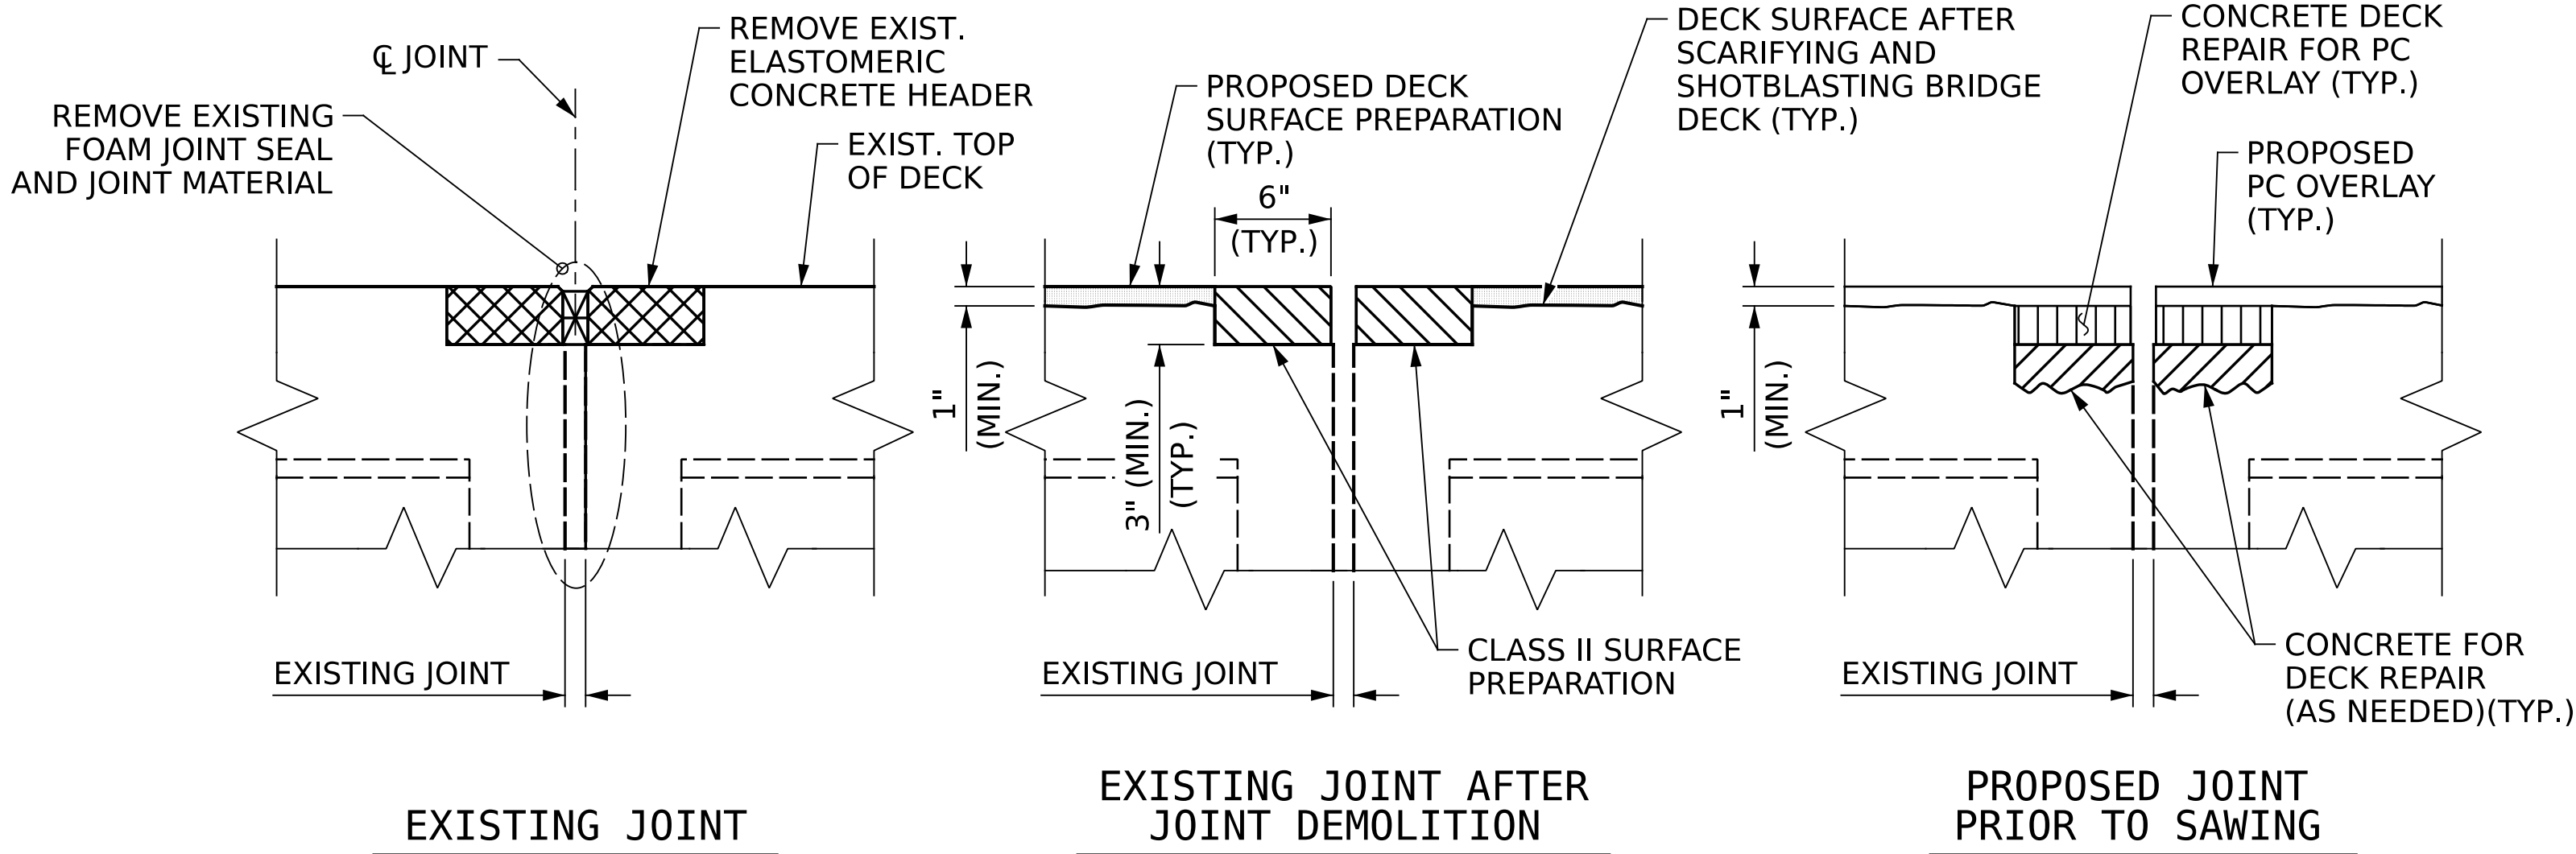

SECTION B-B

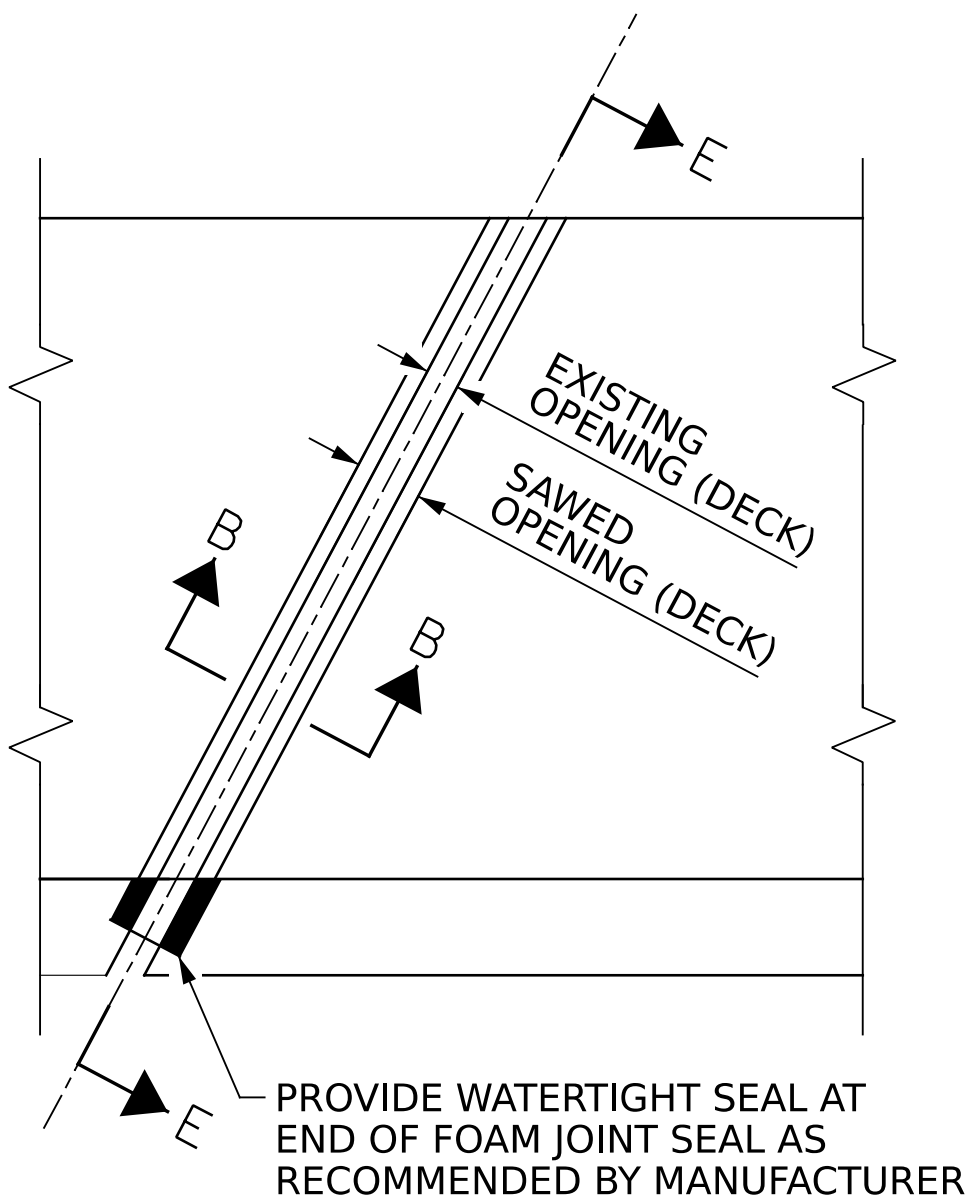


PLAN

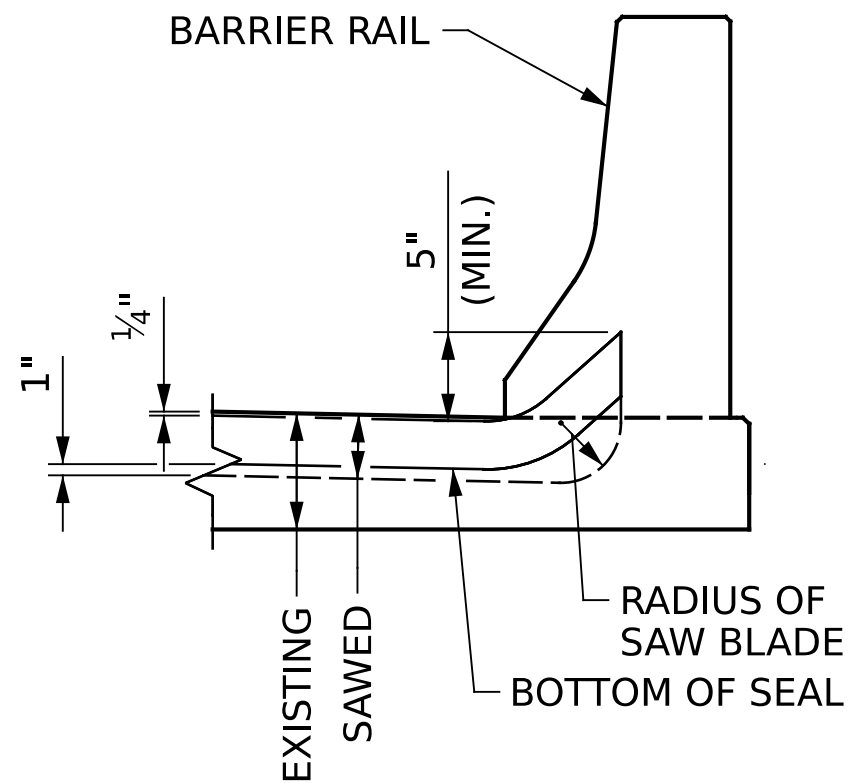


SECTION E-E


FOAM JOINT SEAL SHALL BE FACTORY FORMED OR CUT, HEAT WELDED AND TURNED UP PARALLEL TO SLOPED FACE OF BARRIER RAIL.

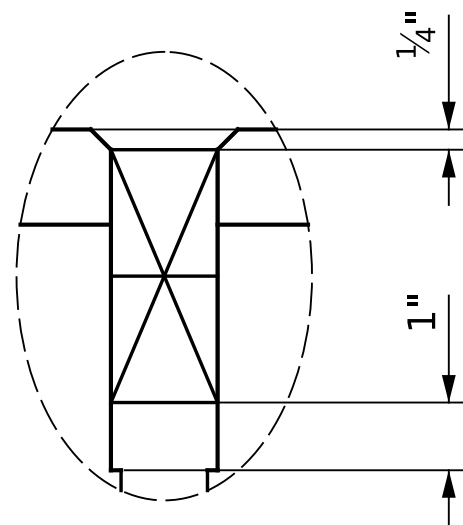

DETAIL "A"

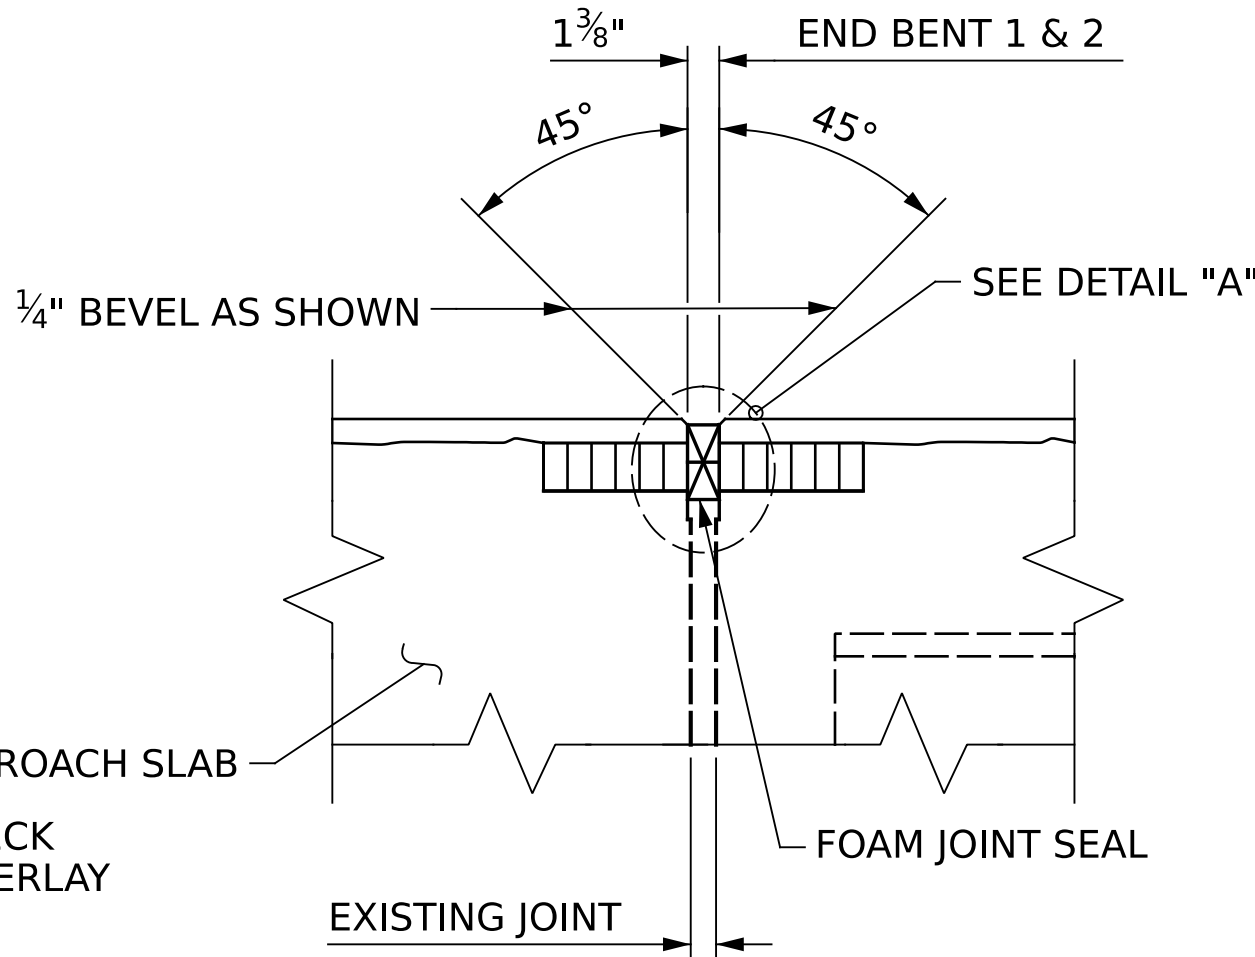

PROPOSED FOAM JOINT SEAL

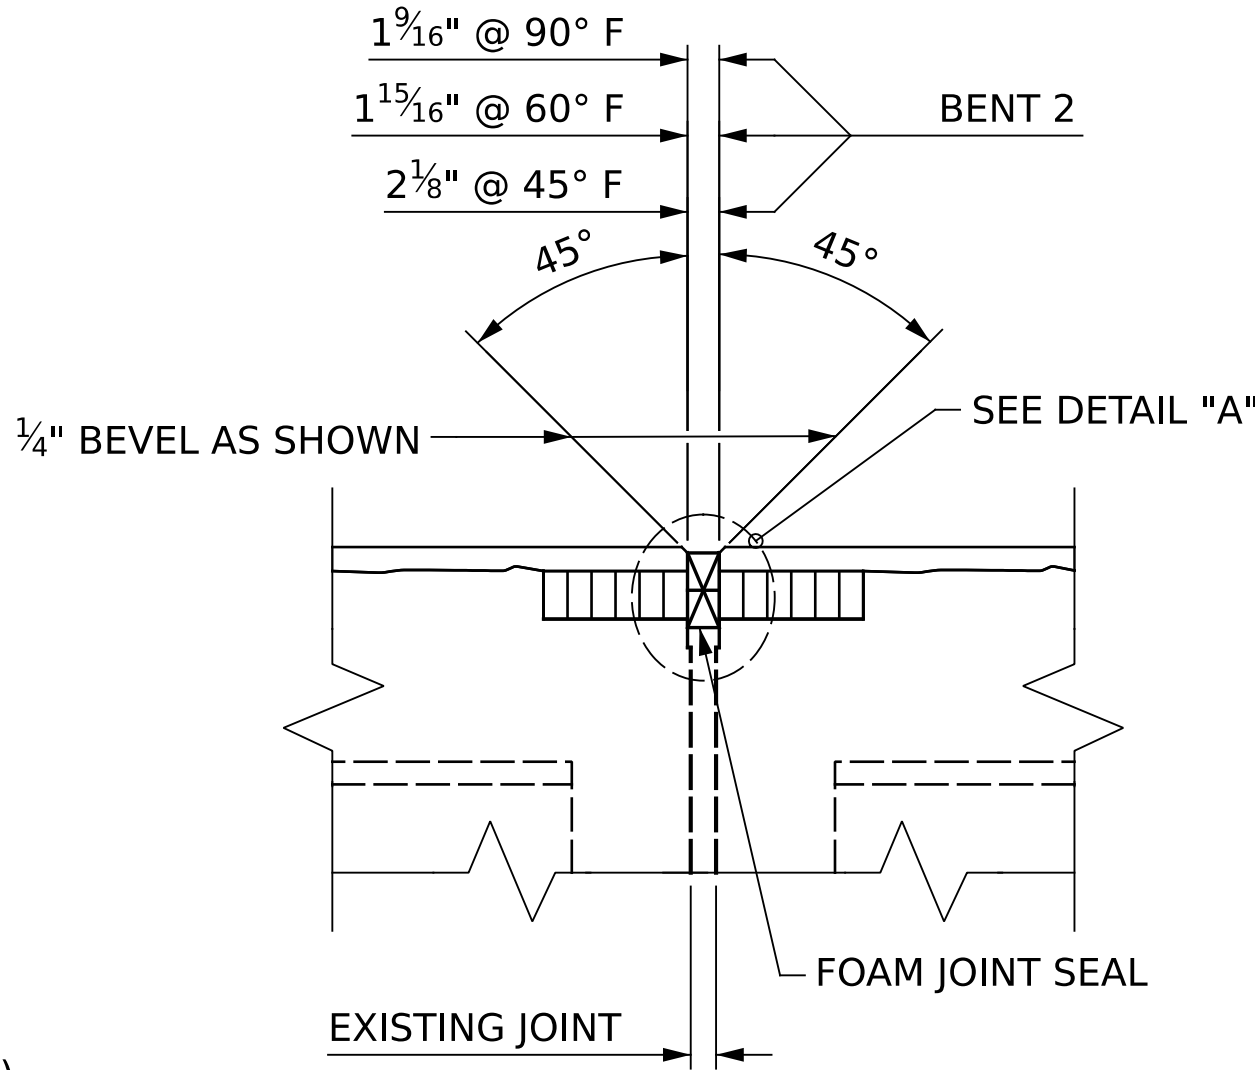


PROPOSED FOAM JOINT SEAL

AS-BUILT SUMMARY OF QUANTITIES

ITEM	LOCATION	ESTIMATED	ACTUAL
FOAM JOINT SEALS FOR PRESERVATION	END BENT 1	42.5 LIN.FT.	
	BENT 2	43.0 LIN.FT.	
	END BENT 2	42.50 LIN.FT.	
CONCRETE DECK REPAIR FOR PC OVERLAY	END BENT 1	4.7 SQ.YDS.	
	BENT 2	4.7 SQ.YDS.	
	END BENT 2	4.7 SQ.YDS.	
EPOXY COATING	BENT 2	147 SQ.YDS.	

PROJECT NO. **HI-0018**  
**COLUMBUS** COUNTY  
BRIDGE NO. **230381**

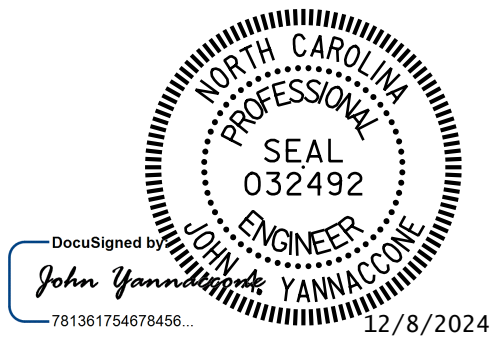

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

FOAM JOINT SEAL  
DETAILS

DRAWN BY : **R.L.PUTEK** DATE : **08/2024**  
CHECKED BY : **J.A.YANNACCONE** DATE : **08/2024**




One Glenwood Avenue  
Suite 900  
Raleigh, NC 27603  
919-420-7660  
NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED


REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S3-06
1			3			TOTAL SHEETS
2			4			79



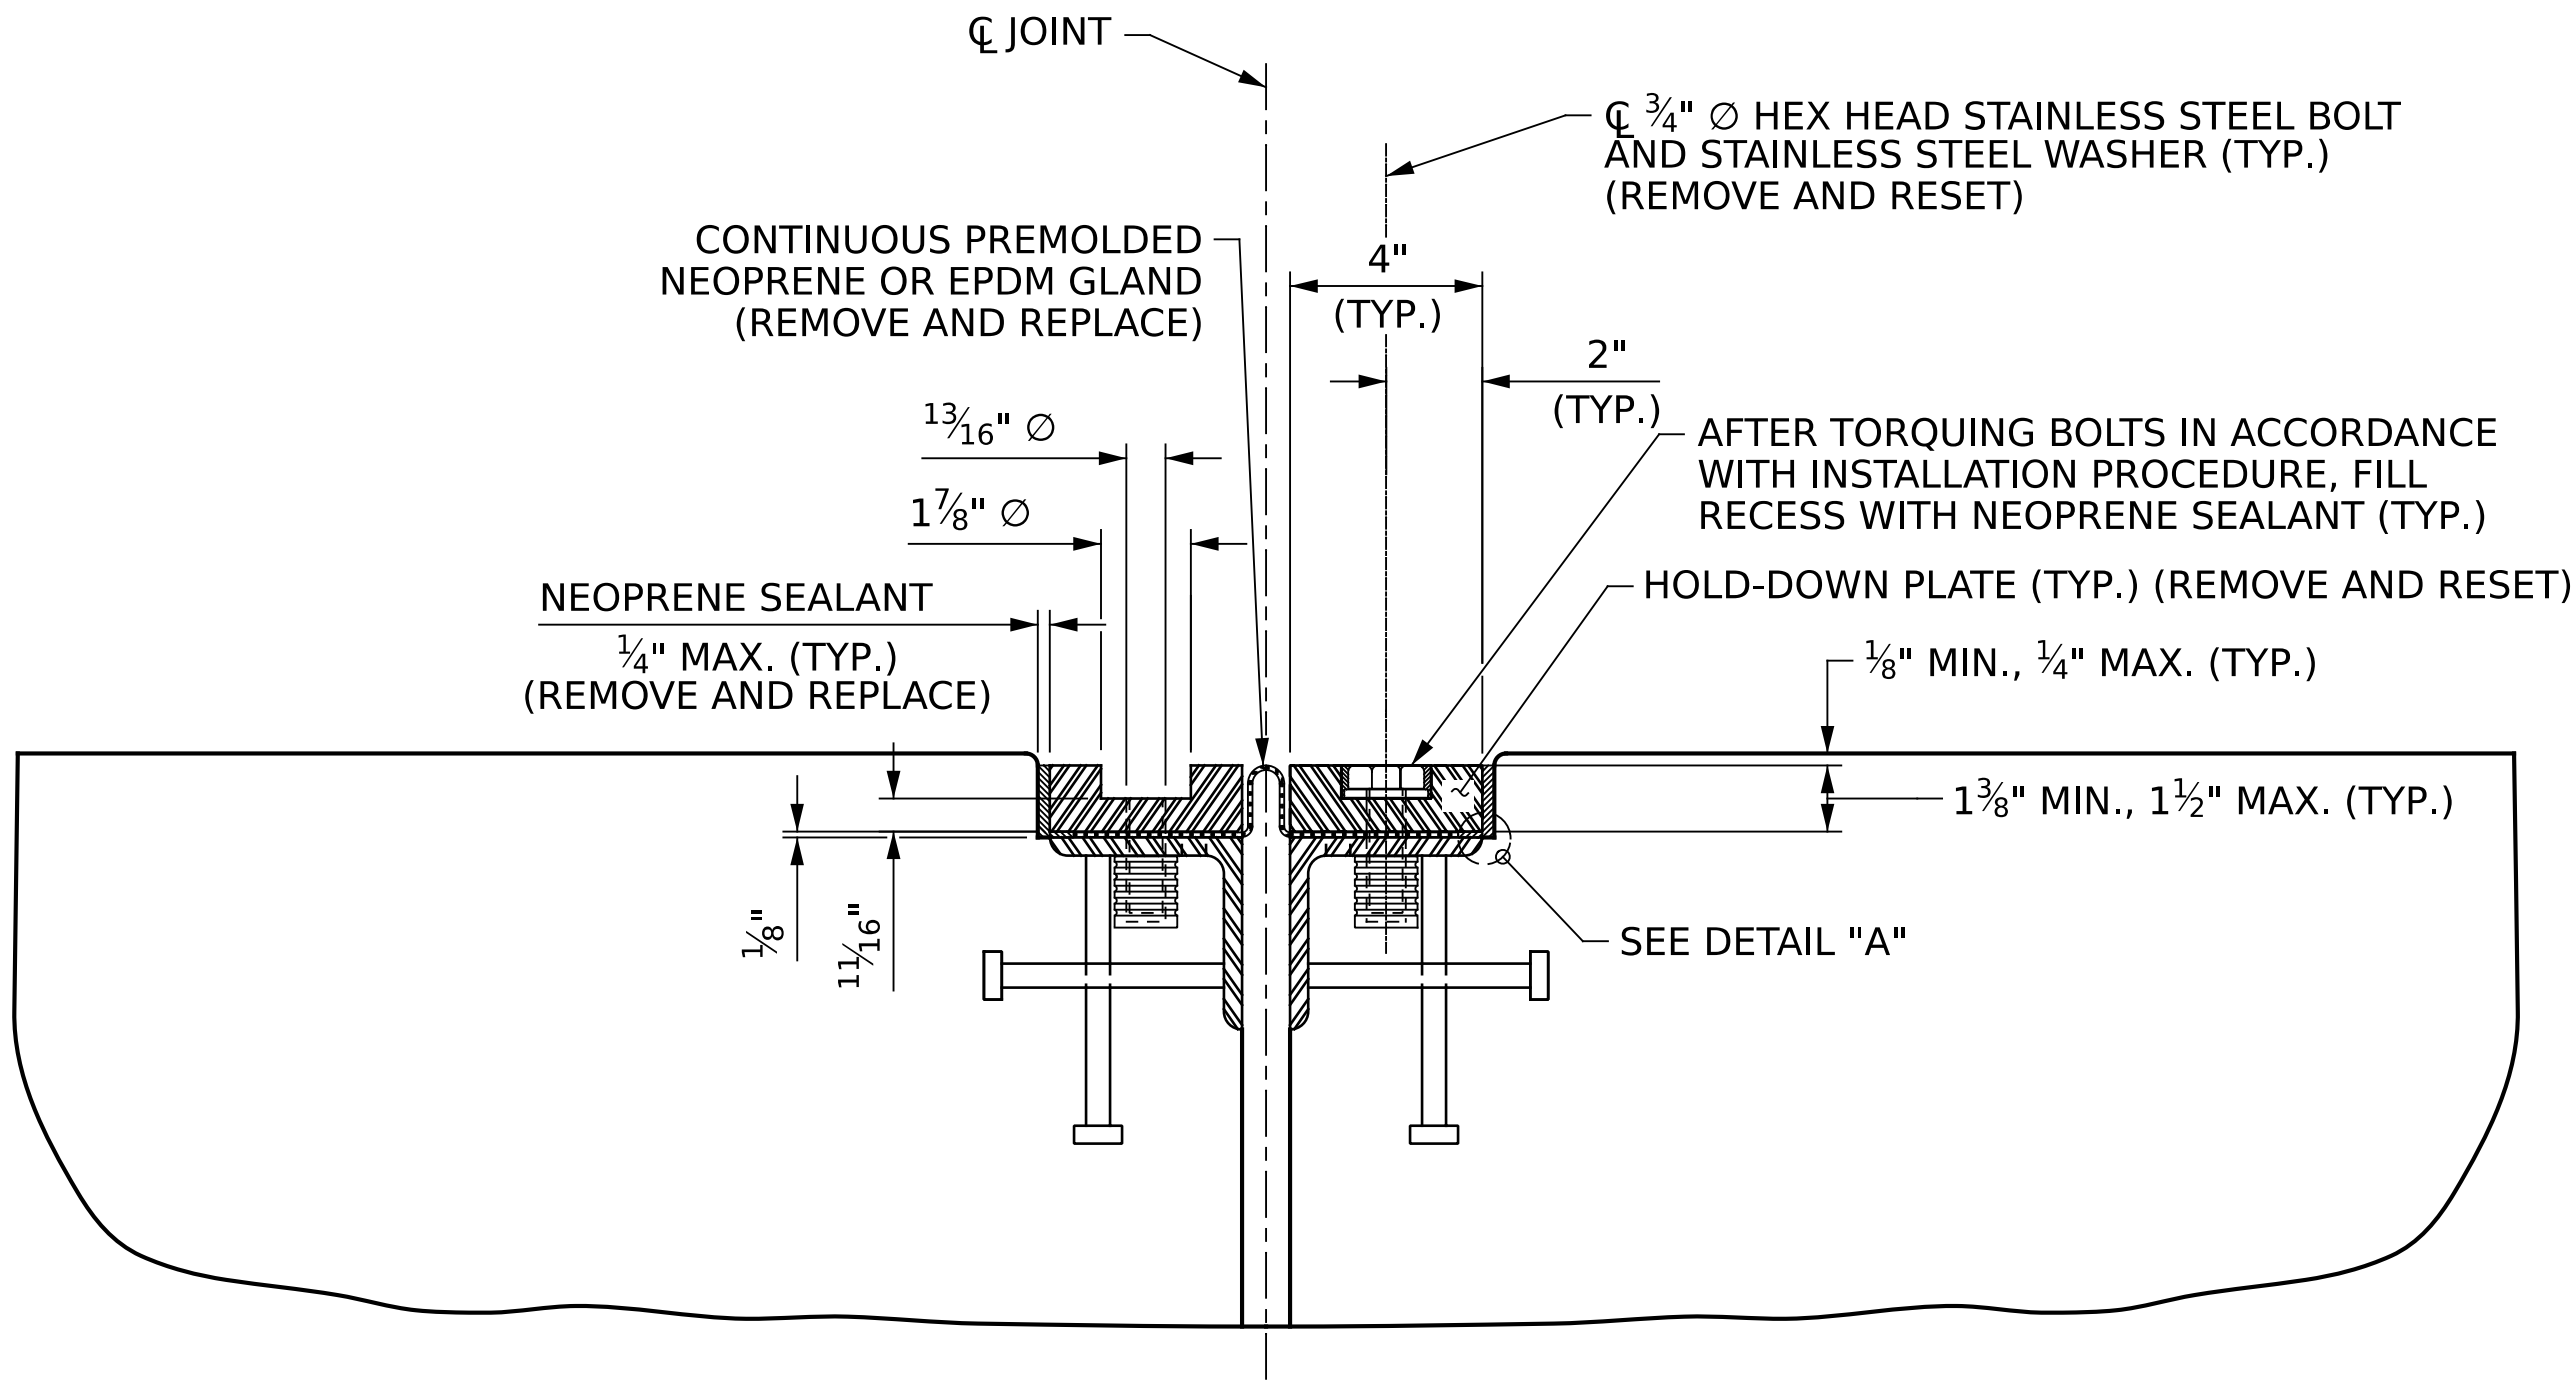


### SECTION C-C


SECTION NORMAL TO JOINT -- SEE DECK REPAIR SHEETS

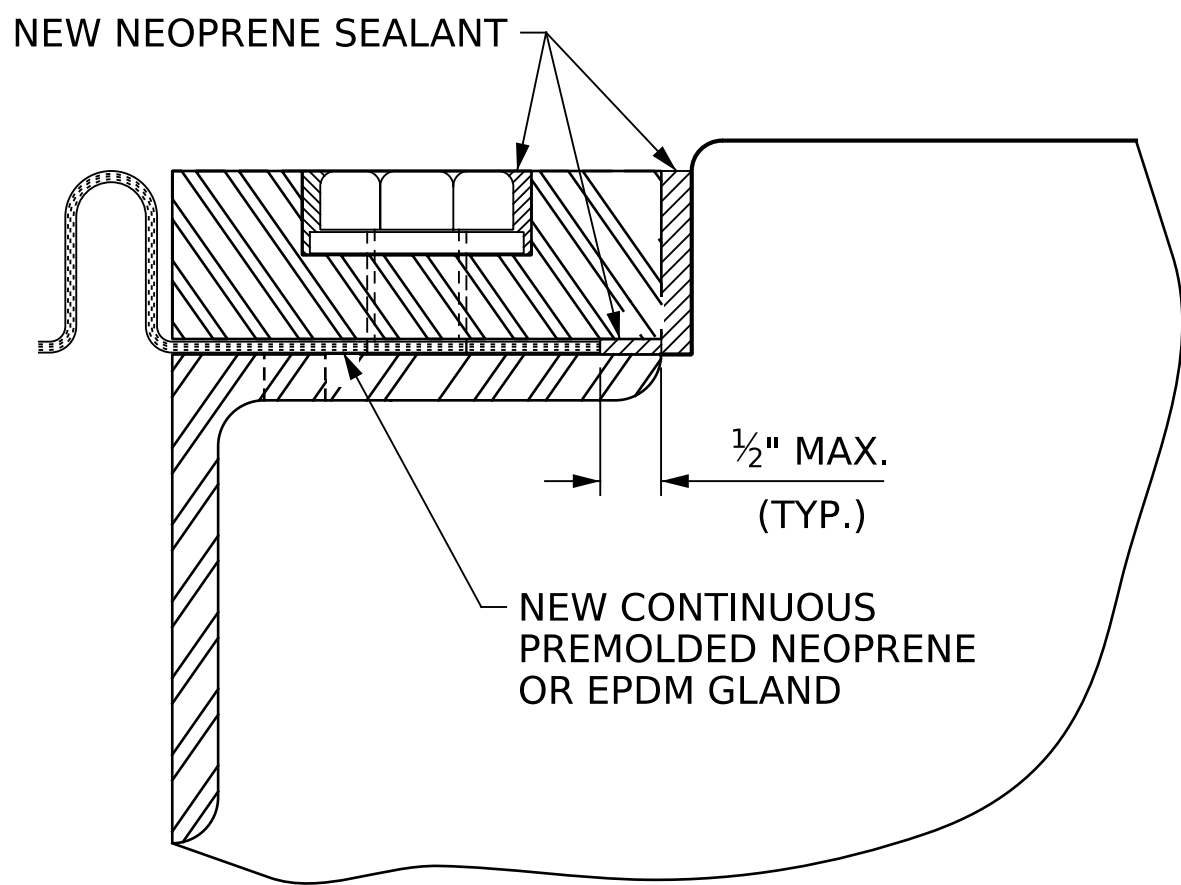

DETAIL "A"

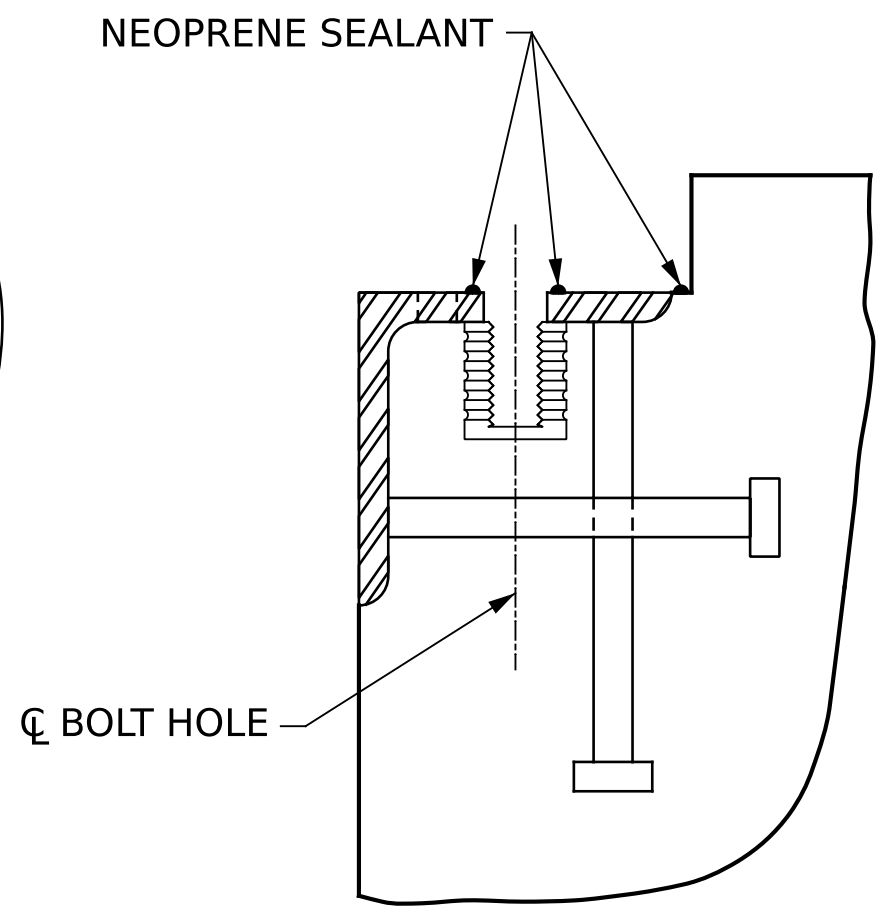

CROSS-SECTION

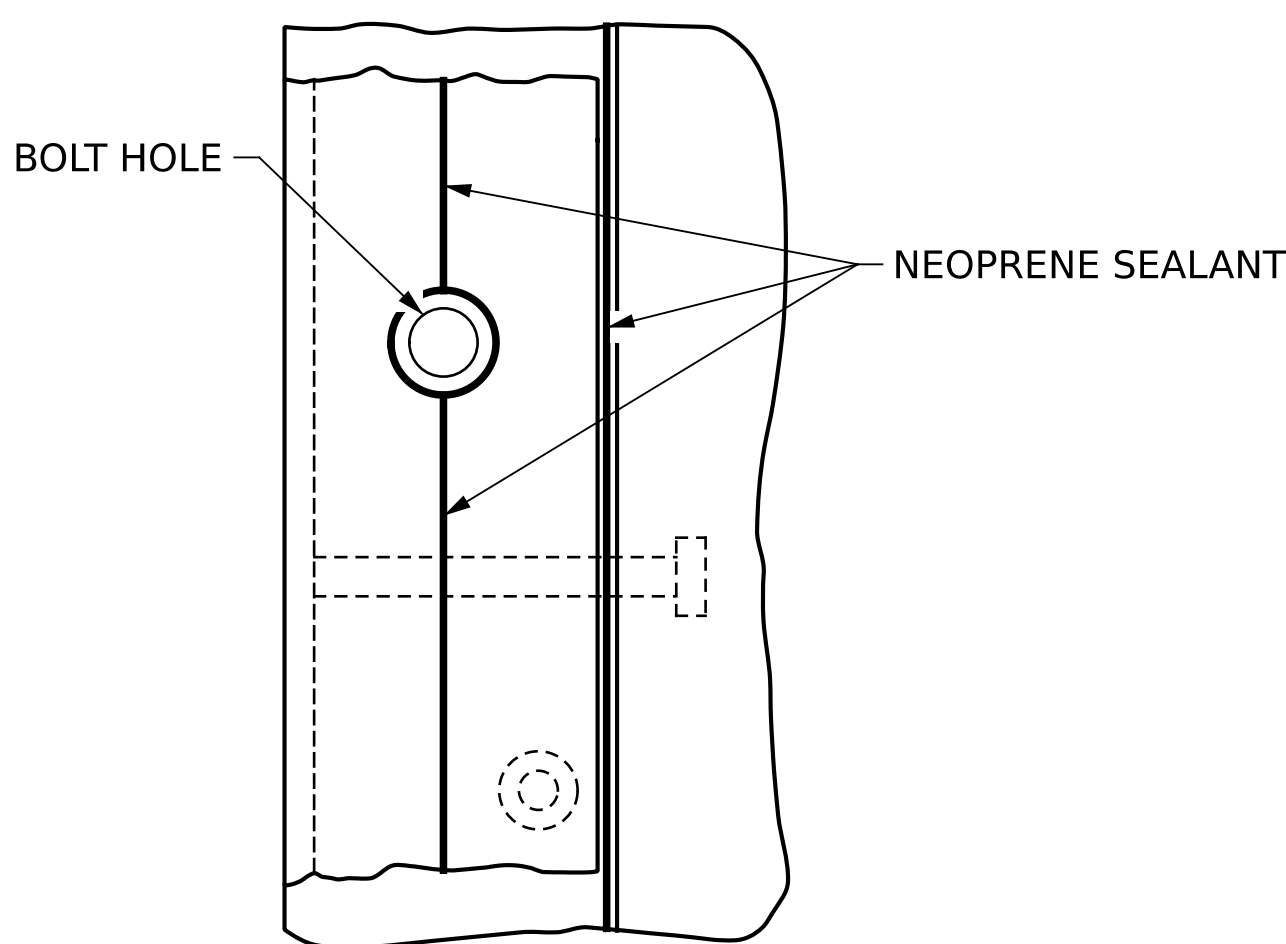

CROSS-SECTION

### INSTALLATION SKETCH

### REPAIR INSTALLATION PROCEDURE

LOOSEN THE EXISTING BOLTS AND HOLD-DOWN PLATES TO REMOVE AND REPLACE THE EXISTING GLAND. REMOVE THE EXISTING NEOPRENE SEALANT AND CLEAN THE EXISTING BASE ANGLE OF OIL, GREASE AND OTHER LATENTS.

LAY THE NEW GLAND ON THE BASE ANGLE AND FIELD MARK THE NEW GLAND FOR THE BOLT HOLES. HOLES IN THE NEW GLAND SHALL BE PUNCHED 7/8" IN DIAMETER WITH A HAND PUNCH.

IN ORDER TO CHECK FOR PROPER ALIGNMENT, PLACE THE NEW GLAND HOLD-DOWN PLATES ON THE BASE ANGLE. DO NOT APPLY NEW NEOPRENE SEALANT. BOLT THE HOLD-DOWN PLATES TO THE BASE ANGLE, BUT DO NOT TIGHTEN. THE ENGINEER WILL INSPECT THE JOINT SEAL DEVICE FOR PROPER ALIGNMENT.

AFTER INSPECTION, REMOVE THE HOLD-DOWN PLATES AND NEW GLAND. APPLY NEW NEOPRENE SEALANT TO THE BASE ANGLE IN ACCORDANCE WITH THE "INSTALLATION SKETCH". PLACE NEW GLAND AND HOLD-DOWN PLATES ON THE BASE ANGLE. BOLT THE HOLD-DOWN PLATES TO THE BASE ANGLE ASSEMBLY AND TORQUE THE BOLTS TO 88 FT-LBS WITH A TORQUE WRENCH. CHECK THE TORQUE AFTER THREE (3) HOURS AND, IF NECESSARY, RETIGHTEN TO 88 FT-LBS. A FINAL CHECK SHALL BE MADE AT SEVEN (7) DAYS. TORQUE SHALL NOT BE LESS THAN 80 FT-LBS AFTER SEVEN (7) DAYS.

AFTER PROPER TORQUING, CLEAN THE BOLT HOLE RECESSES AND THE RECESS BETWEEN THE JOINT SEAL DEVICE AND CONCRETE. COMPLETELY FILL THESE RECESSES WITH NEW NEOPRENE SEALANT.

### GENERAL NOTES

ALL HOLD-DOWN BOLTS SHALL CONFORM TO ASTM F593 ALLOY 304 STAINLESS STEEL AND WASHERS SHALL CONFORM TO ASTM F844 EXCEPT THEY SHALL BE MADE FROM ALLOY 304 STAINLESS STEEL.

A PREMOLDED CORRUGATED OR NON-CORRUGATED GLAND SHALL BE USED FOR JOINTS SKEWED BETWEEN 50° THRU 130°. FOR JOINTS SKEWED LESS THAN 50° OR MORE THAN 130°, ONLY A CORRUGATED GLAND SHALL BE USED.

THE FINISHED EXPANSION SEAL DEVICE SHALL BE A MINIMUM OF 1/8" AND A MAXIMUM OF 1/4" BELOW THE TOP OF SLAB.

FOR EXPANSION JOINT SEAL REPAIR, SEE SPECIAL PROVISIONS.

NO SEPARATE PAYMENT WILL BE MADE FOR REMOVING AND REINSTALLING MEDIAN AND BARRIER RAIL COVER PLATES. THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT PRICE BID FOR "EXPANSION JOINT SEAL REPAIR".

CLEAN AND REMOVE DEBRIS FROM THE TOP OF THE BENT CAPS AND APPLY EPOXY PROTECTIVE COATING. EPOXY COATING SHALL BE APPLIED TO THE TOP SURFACE OF THE CAPS. THE CONTRACTOR SHALL NOT COAT THE AREA OF THE CAPS BENEATH THE ELASTOMERIC BEARINGS. FOR EPOXY COATING, SEE SPECIAL PROVISIONS.


### MOVEMENT AND SETTING OF JOINT

LOCATION	SKEW ANGLE	TOTAL MOVEMENT (ALONG CŁ BRIDGE)	PERPENDICULAR JOINT OPENING AT 45° F	PERPENDICULAR JOINT OPENING AT 60° F	PERPENDICULAR JOINT OPENING AT 90° F
BENT 1	108°-11'-07.4"	5/16"	1 1/8"	1 1/2"	1"

### AS-BUILT SUMMARY OF QUANTITIES

LOCATION	EXPANSION JOINT SEAL REPAIRS		EPOXY COATING	
	ESTIMATE (LIN.FT.)	ACTUAL (LIN.FT.)	ESTIMATE (SQ.FT.)	ACTUAL (SQ.FT.)
BENT 1	43.5		147	

PROJECT NO. **HI-0018**  
**COLUMBUS** COUNTY  
BRIDGE NO. **230381**

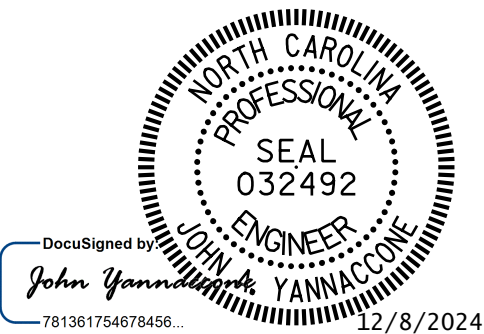

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

### EXPANSION JOINT SEAL DETAILS

DRAWN BY : **R.L.PUTEK** DATE : **08/2024**  
CHECKED BY : **J.A.YANNACONE** DATE : **08/2024**



One Glenwood Avenue  
Suite 900  
Raleigh, NC 27603  
919-420-7660  
NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S3-07
2			4			TOTAL SHEETS 79





NOTES:

GENERAL DRAWING INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED 09/26/2023.

BRIDGE ORIENTATION CONFORMS TO THE EXISTING BRIDGE PLANS AND ROUTINE INSPECTION REPORT.

SCOPE OF WORK:

- PARTIALLY REMOVE TOP OF BRIDGE DECK CONCRETE BY SCARIFICATION AND SHOTBLASTING METHODS.
- OVERLAY PREPARED TOP OF BRIDGE DECK WITH POLYMER CONCRETE (PC).
- REMOVE EXISTING JOINT MATERIAL AND INSTALL FOAM JOINTS.
- REPLACE EXISTING JOINT GLAND OF EXPANSION JOINT SEALS.
- GROOVE PC BRIDGE DECK.
- CLEAN AND PAINT EXISTING STRUCTURAL WEATHERING STEEL BEAMS.

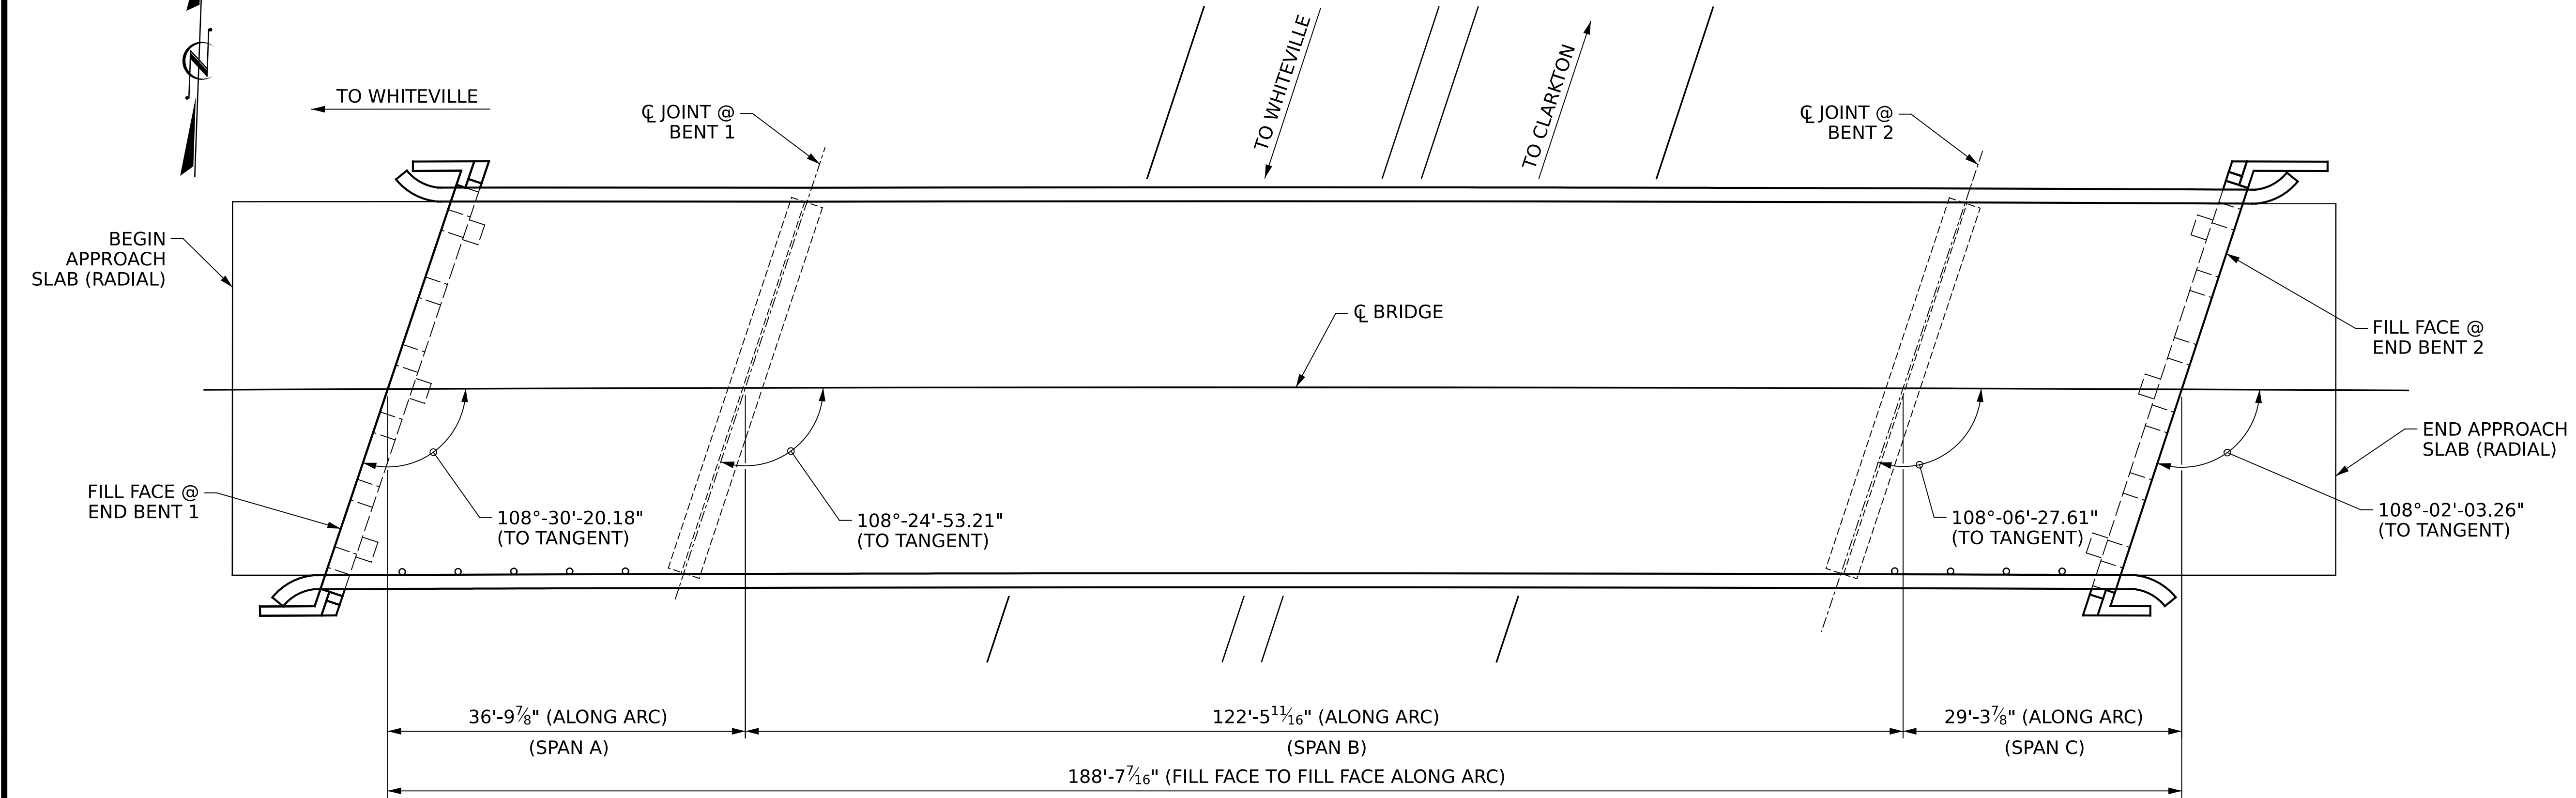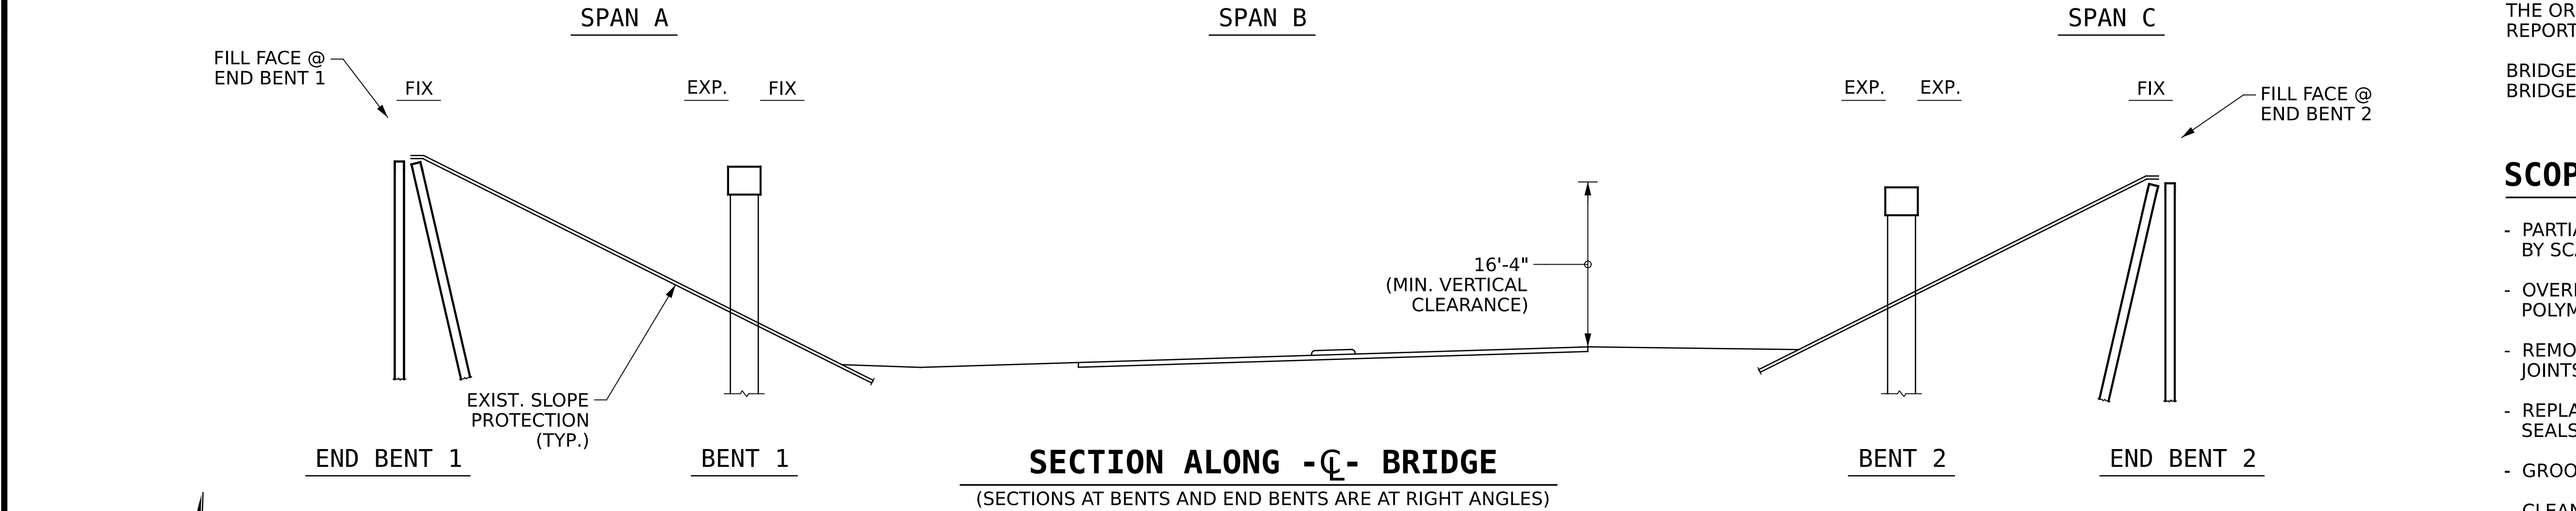

PLAN  
(FOOTINGS AND PILES NOT SHOWN FOR CLARITY)

PROJECT NO. **HI-0018**  
**COLUMBUS** COUNTY  
BRIDGE NO. **230382**

SHEET 1 OF 2

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

GENERAL DRAWING  
FOR BRIDGE ON  
US 74 - US 76 BYP WBL  
OVER SR 1700 (RED HILL ROAD)

DRAWN BY : R.L.PUTEK DATE : 08/2024  
CHECKED BY : J.A.YANNACCONE DATE : 08/2024


I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED  
ACCORDING TO THESE PLANS OR AS NOTED HEREIN.

\_\_\_\_\_  
RESIDENT ENGINEER

\_\_\_\_\_  
DATE



One Glenwood Avenue  
Suite 900  
Raleigh, NC 27603  
919-420-7660  
NC Lic. No. F-0270

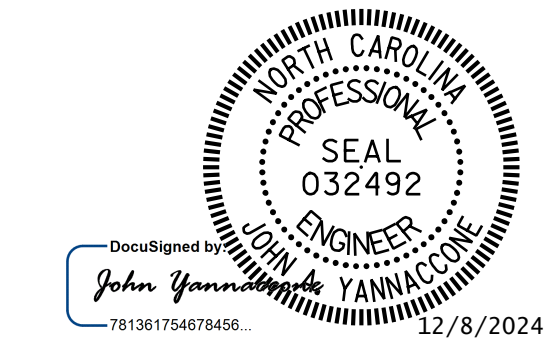

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S4-01 TOTAL SHEETS 79
2			4			