



ONSITE CONCRETE WASHOUT STRUCTURE WITH LINER


PROJECT REFERENCE NO.	SHEET NO.
I-6001	EC-2A
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

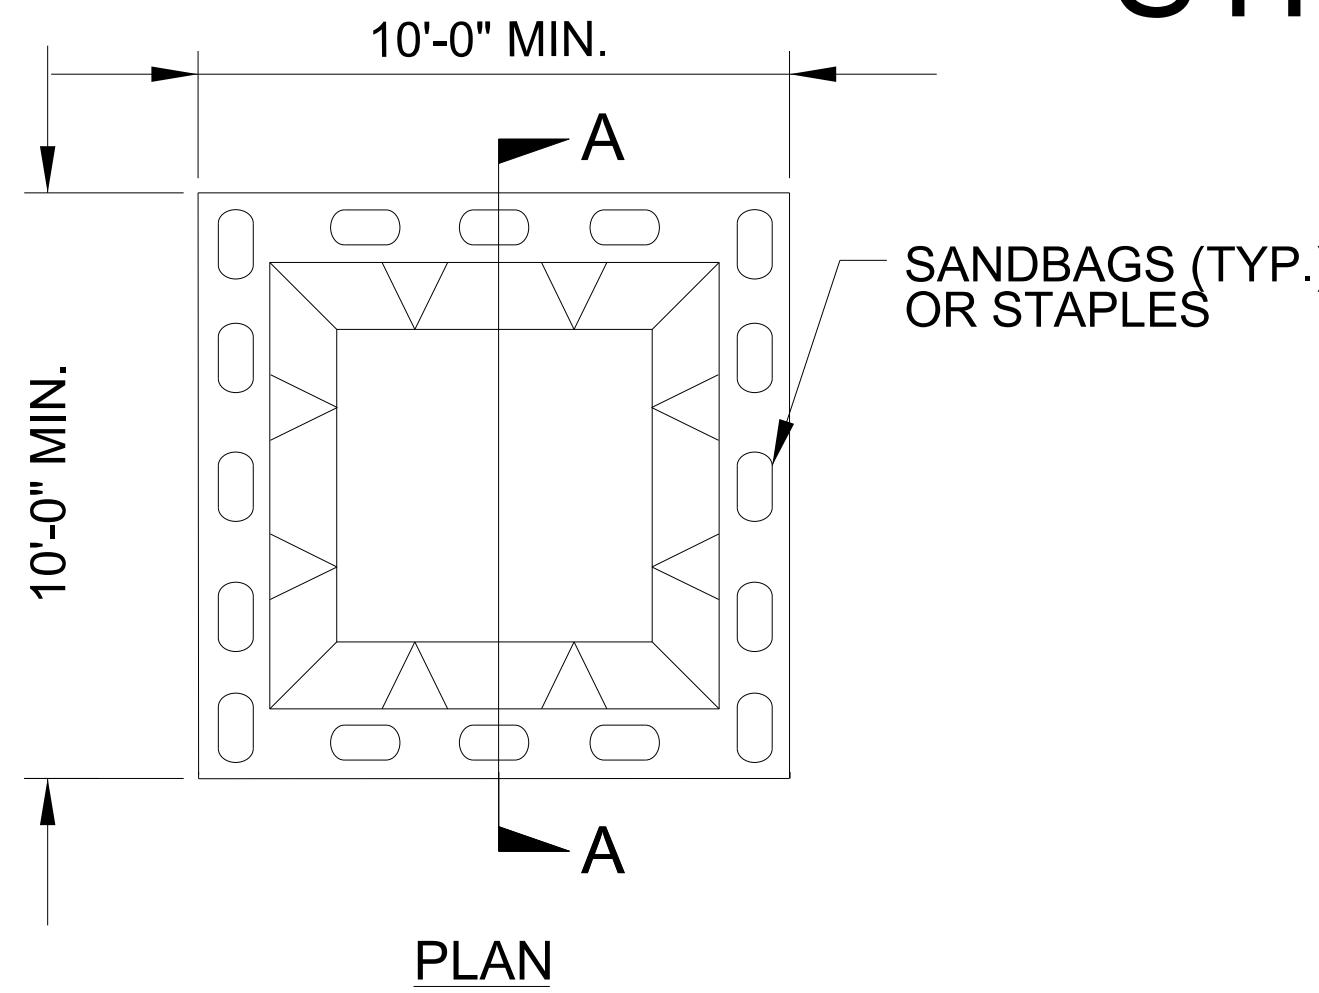

PLAN

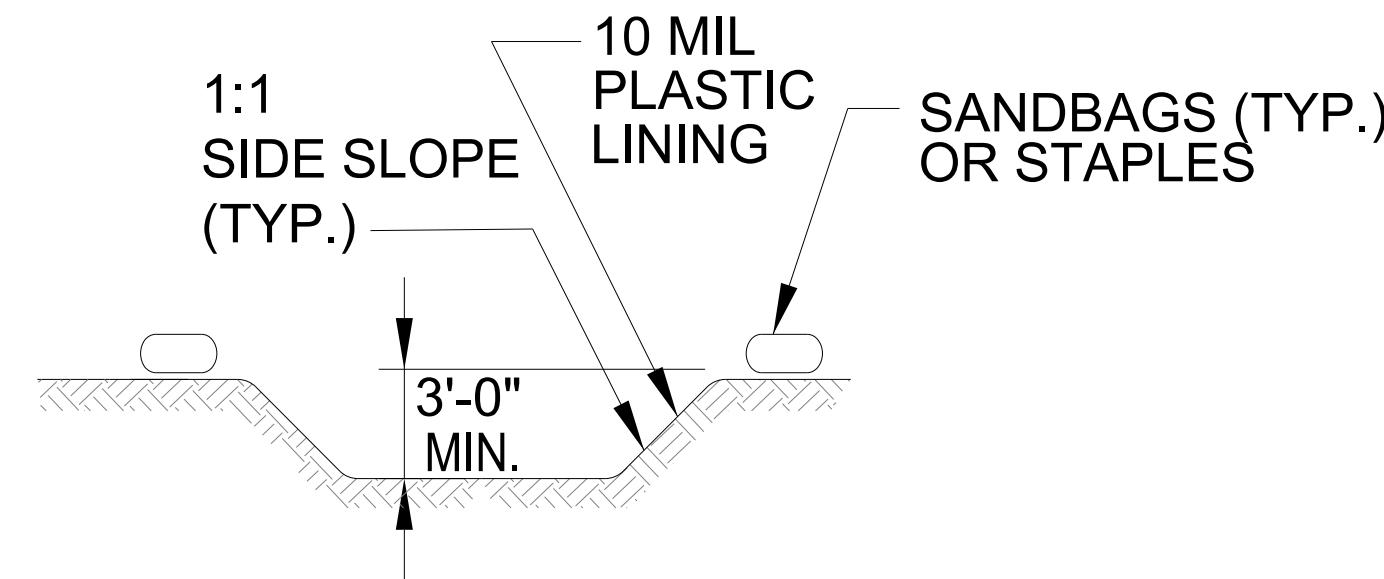

SECTION A-A

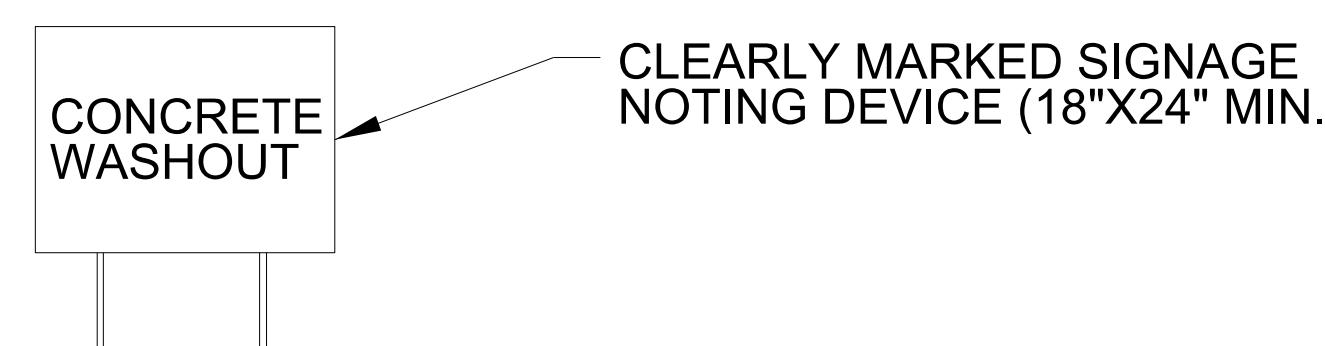


CLEARLY MARKED SIGNAGE
NOTING DEVICE (18"X24" MIN.)

BELOW GRADE WASHOUT STRUCTURE


NOT TO SCALE

NOTES:


1. ACTUAL LOCATION DETERMINED IN FIELD
2. THE CONCRETE WASHOUT STRUCTURES SHALL BE MAINTAINED WHEN THE LIQUID AND/OR SOLID REACHES 75% OF THE STRUCTURES CAPACITY TO PROVIDE ADEQUATE HOLDING CAPACITY WITH A MINIMUM 12 INCHES OF FREEBOARD.
3. CONCRETE WASHOUT STRUCTURE NEEDS TO BE CLEARLY MARKED WITH SIGNAGE NOTING DEVICE.

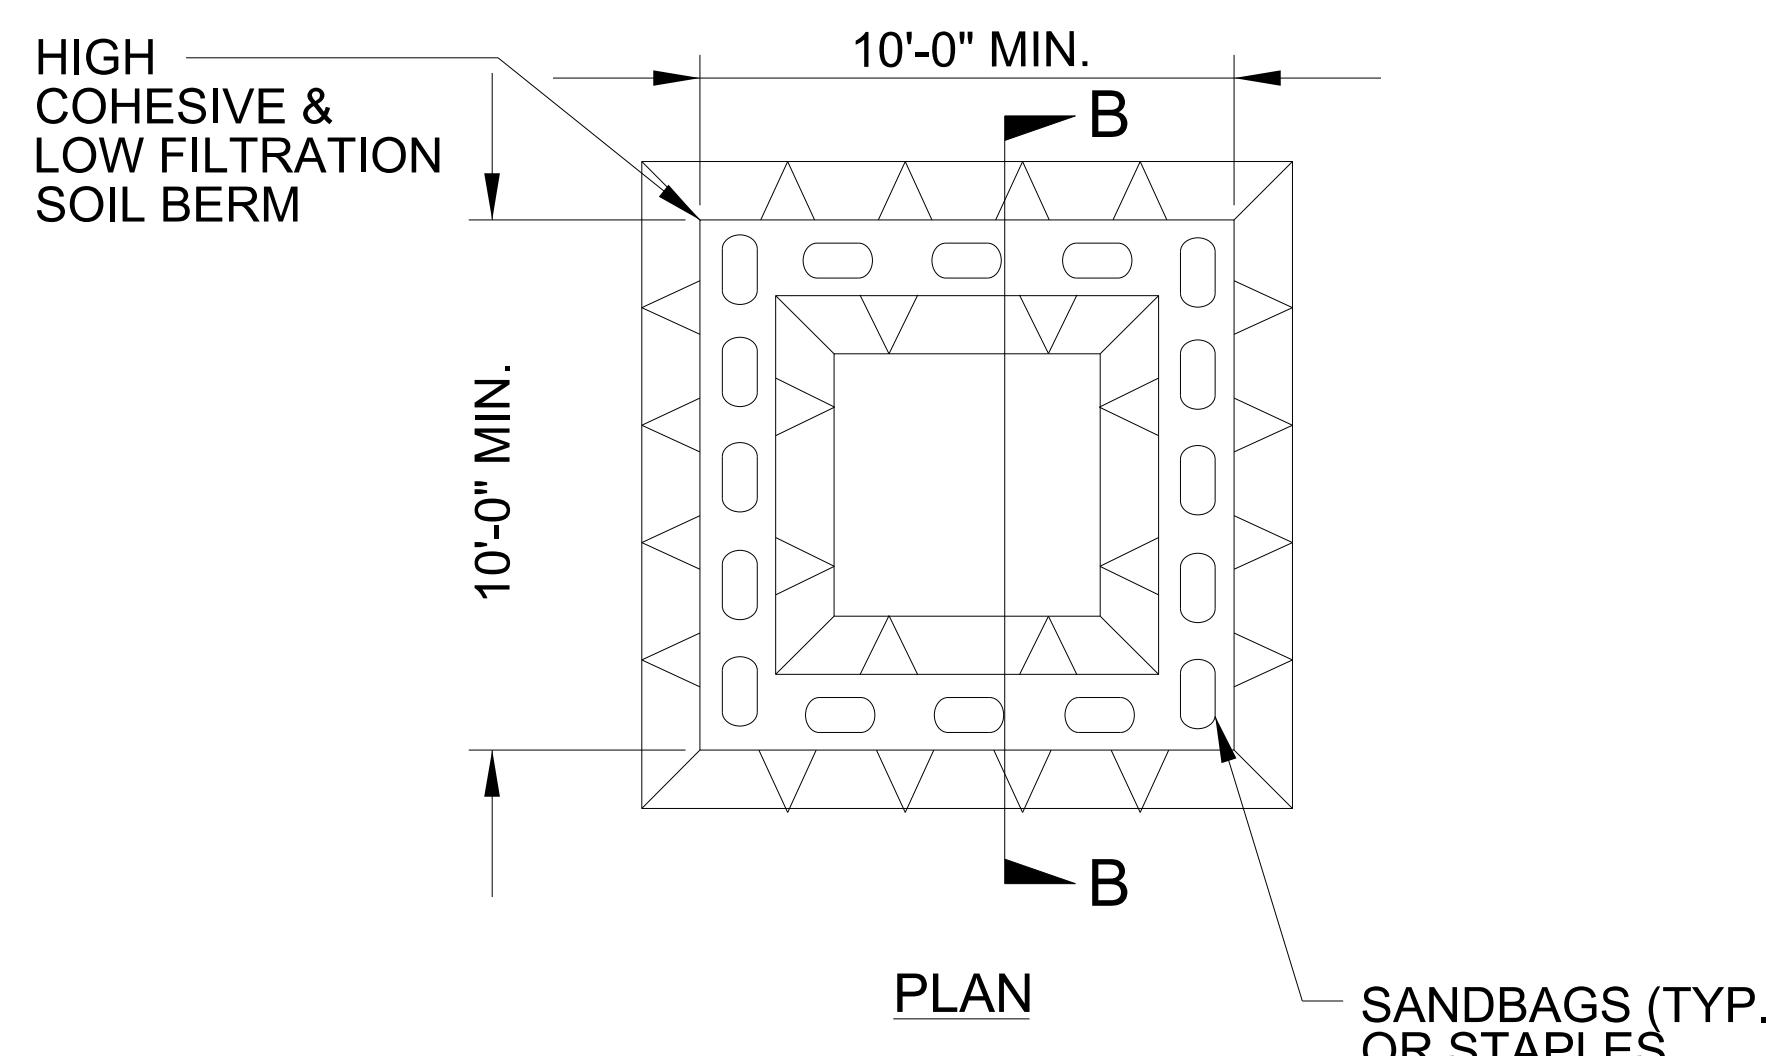

PLAN

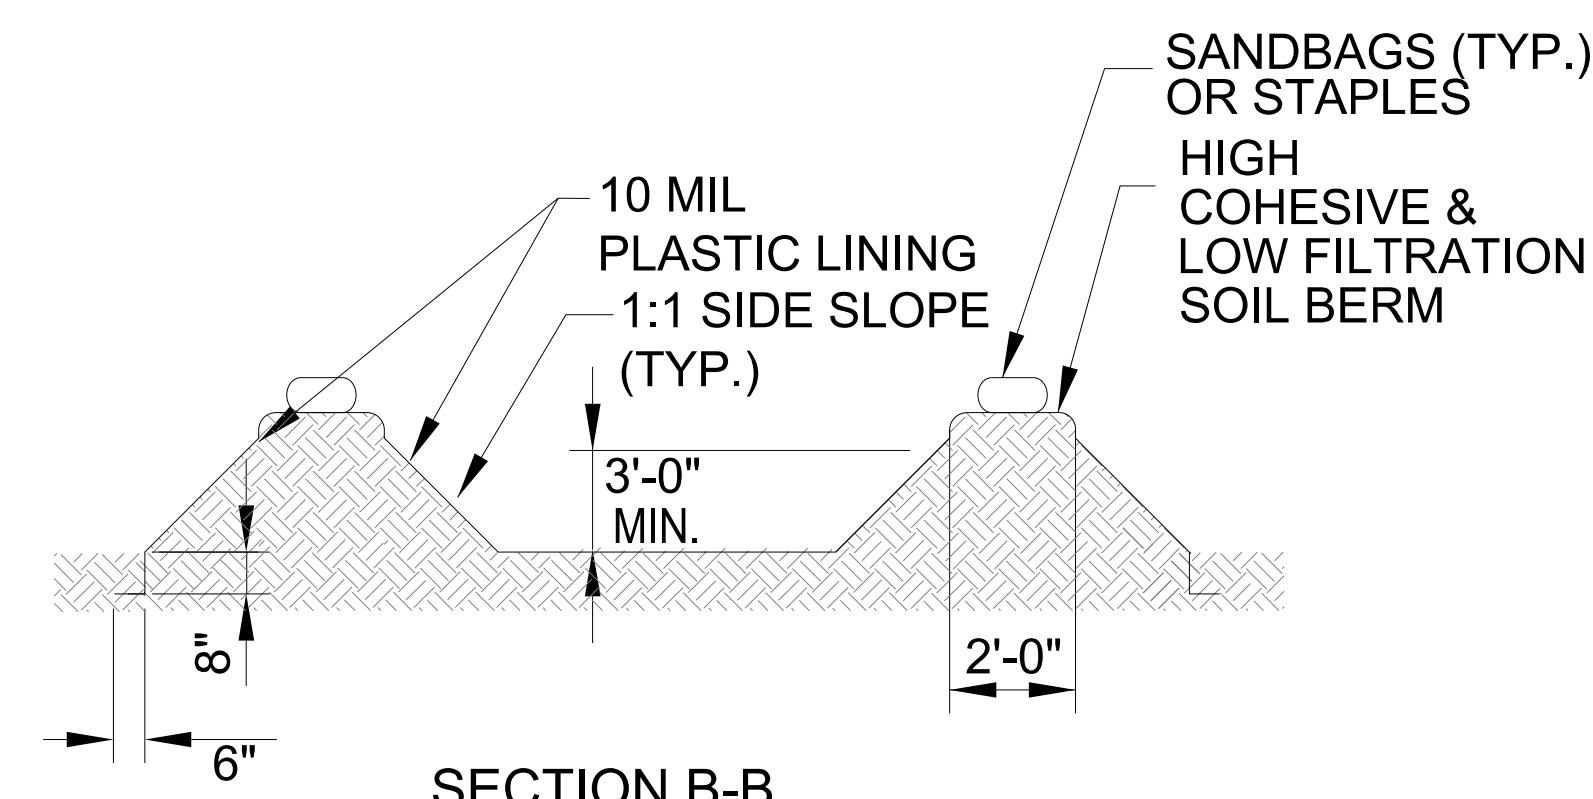

SECTION B-B

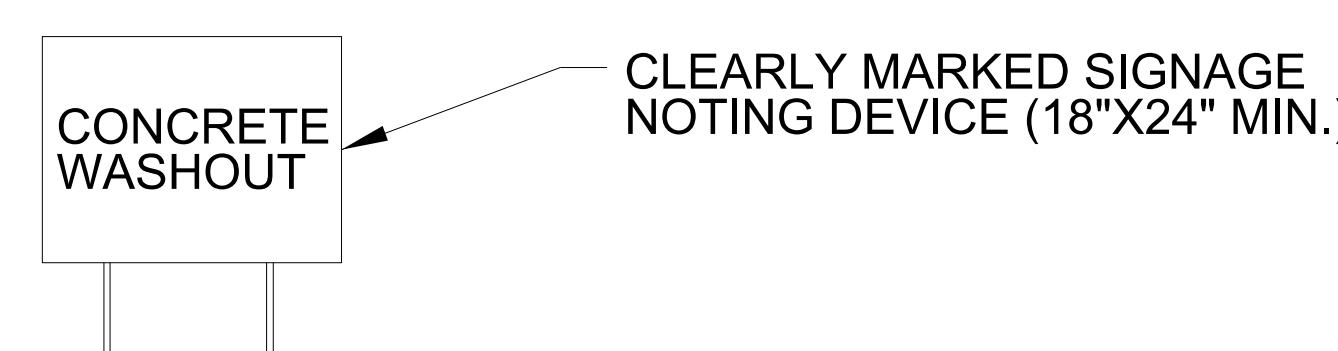

CLEARLY MARKED SIGNAGE
NOTING DEVICE (18"X24" MIN.)

ABOVE GRADE WASHOUT STRUCTURE

NOT TO SCALE

NOTES:

1. ACTUAL LOCATION DETERMINED IN FIELD
2. THE CONCRETE WASHOUT STRUCTURES SHALL BE MAINTAINED WHEN THE LIQUID AND/OR SOLID REACHES 75% OF THE STRUCTURES CAPACITY TO PROVIDE ADEQUATE HOLDING CAPACITY WITH A MINIMUM 12 INCHES OF FREEBOARD.
3. CONCRETE WASHOUT STRUCTURE NEEDS TO BE CLEARLY MARKED WITH SIGNAGE NOTING DEVICE.