



# ONSITE CONCRETE WASHOUT STRUCTURE WITH LINER


|                            |                        |
|----------------------------|------------------------|
| PROJECT REFERENCE NO.      | SHEET NO.              |
| HL-0033                    | EC-3                   |
| R/W SHEET NO.              |                        |
| ROADWAY DESIGN<br>ENGINEER | HYDRAULICS<br>ENGINEER |

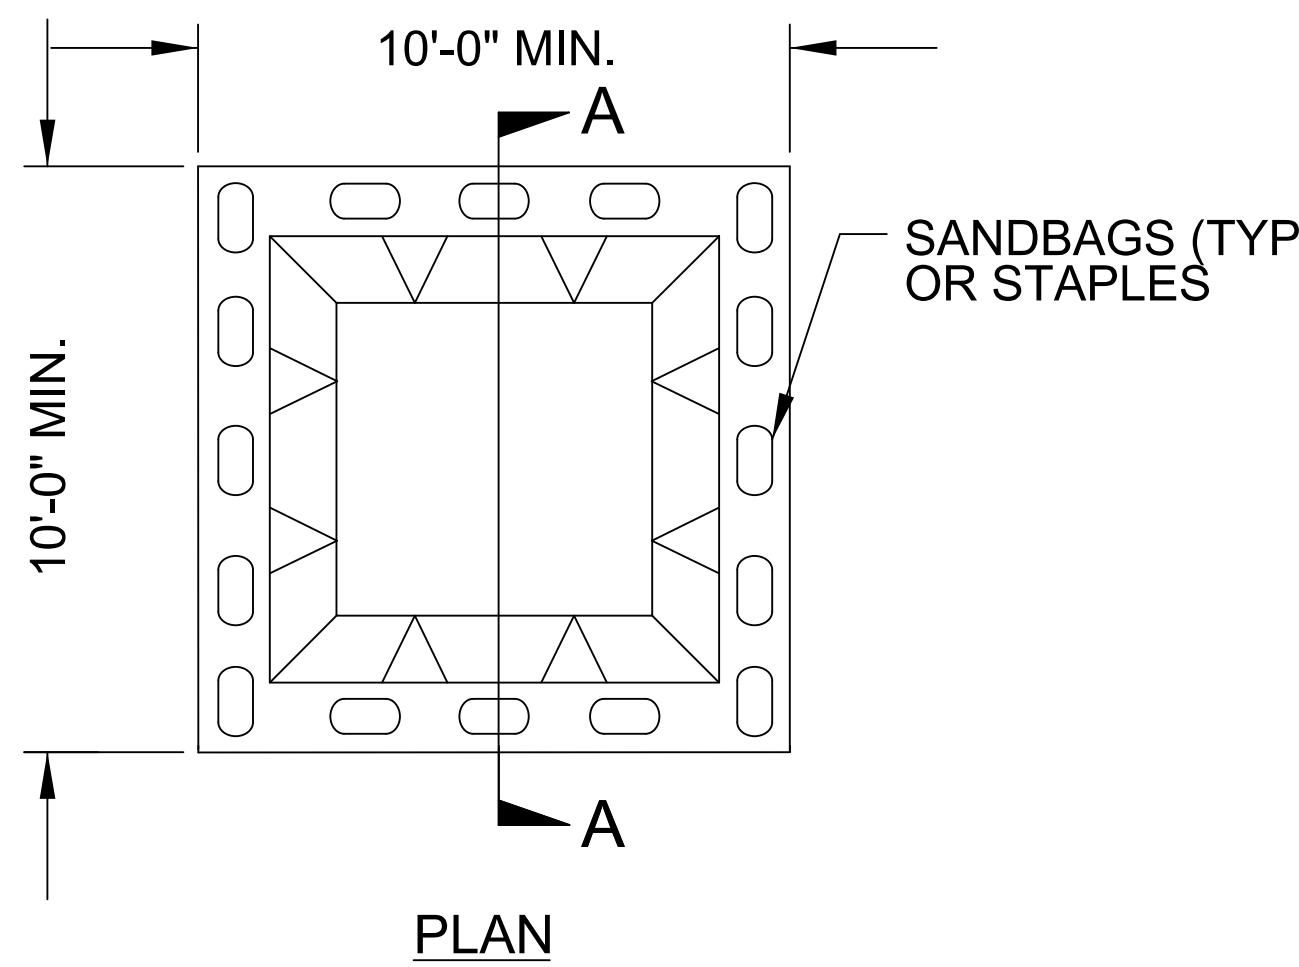

PLAN

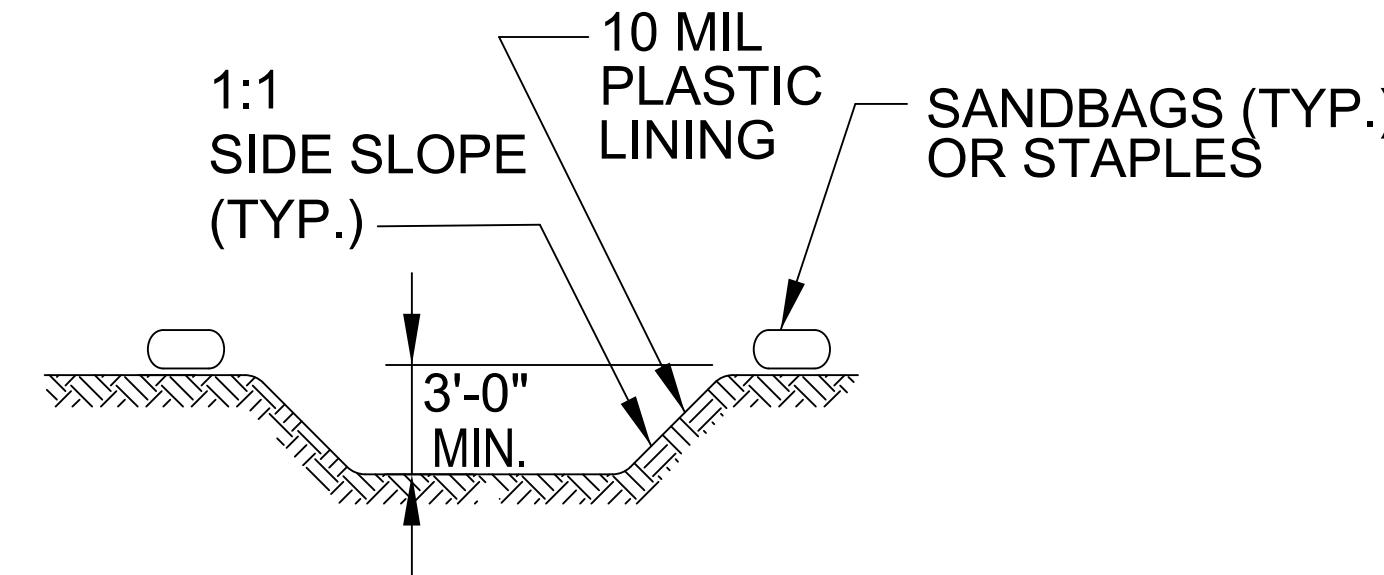

SECTION A-A

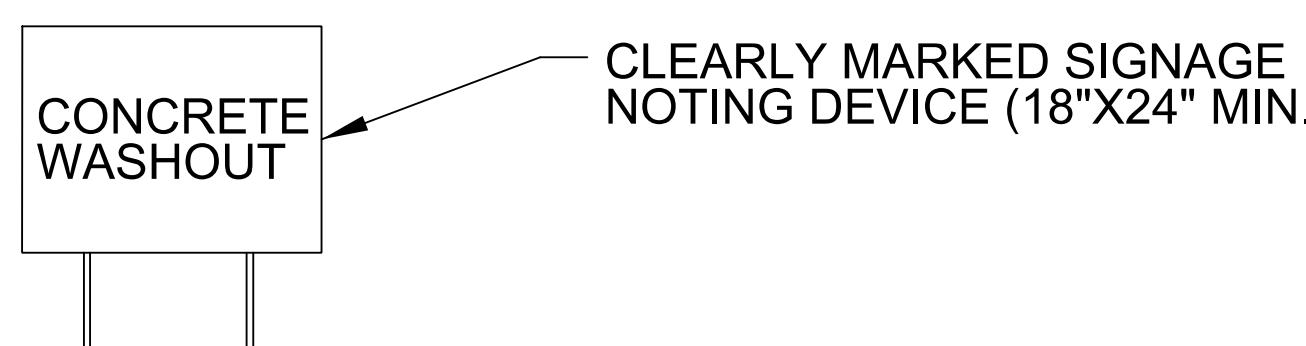


BELOW GRADE WASHOUT STRUCTURE

NOT TO SCALE


NOTES:  
1. ACTUAL LOCATION DETERMINED IN FIELD

2. THE CONCRETE WASHOUT STRUCTURES SHALL BE MAINTAINED WHEN THE LIQUID AND/OR SOLID REACHES 75% OF THE STRUCTURES CAPACITY TO PROVIDE ADEQUATE HOLDING CAPACITY WITH A MINIMUM 12 INCHES OF FREEBOARD.


3. CONCRETE WASHOUT STRUCTURE NEEDS TO BE CLEARLY MARKED WITH SIGNAGE NOTING DEVICE.

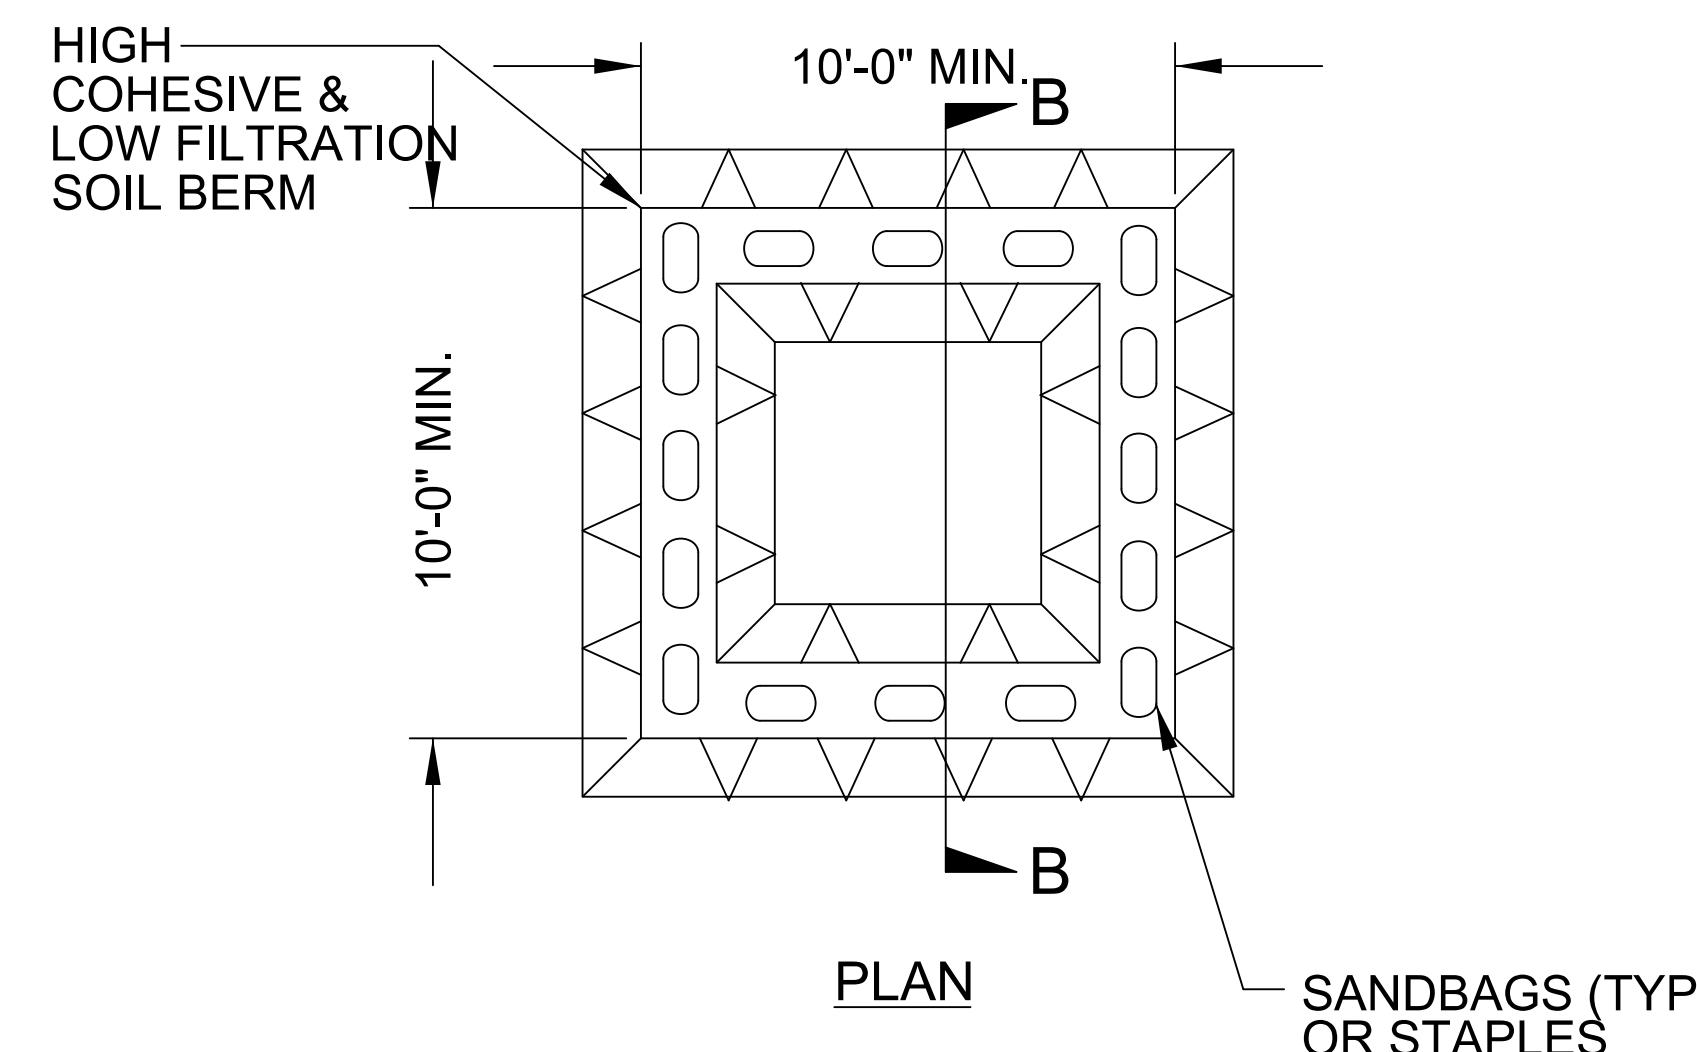

PLAN

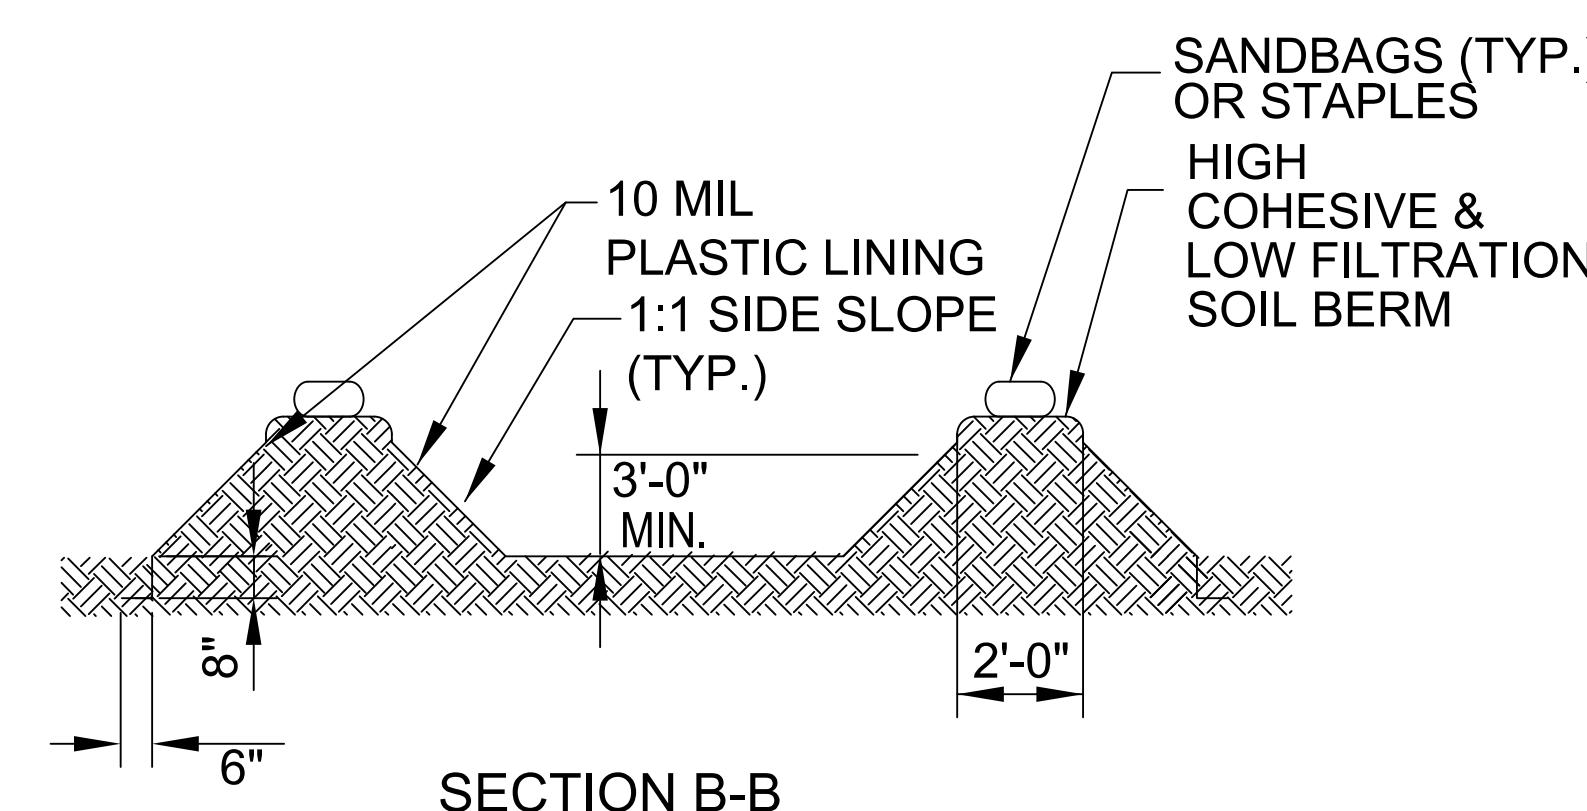

SECTION B-B

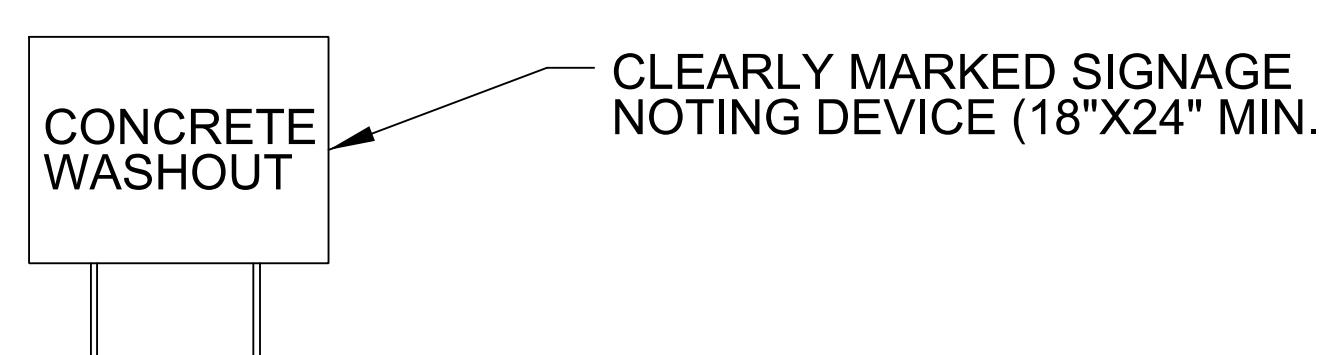

ABOVE GRADE WASHOUT STRUCTURE

NOT TO SCALE

NOTES:  
1. ACTUAL LOCATION DETERMINED IN FIELD

2. THE CONCRETE WASHOUT STRUCTURES SHALL BE MAINTAINED WHEN THE LIQUID AND/OR SOLID REACHES 75% OF THE STRUCTURES CAPACITY TO PROVIDE ADEQUATE HOLDING CAPACITY WITH A MINIMUM 12 INCHES OF FREEBOARD.

3. CONCRETE WASHOUT STRUCTURE NEEDS TO BE CLEARLY MARKED WITH SIGNAGE NOTING DEVICE.