



PROJECT REFERENCE NO.	SHEET NO.
-----------------------	-----------

**NOTES:**

- DESIGN CONFORMS WITH THE SPECIFICATIONS FOR THE DESIGN AND CONSTRUCTION OF STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS - AASHTO.
- USE MATERIALS, FABRICATE AND ERECT SIGNS AND SUPPORTS THAT CONFORM TO THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES.
- USE HIGH STRENGTH BOLTS, NUTS AND WASHERS THAT CONFORM TO ASTM A-325 AND THAT ARE GALVANIZED IN ACCORDANCE WITH ASTM F2329 OR B695 CLASS 55.
- USE BACKING PLATES, SLIP BASE PLATES, FRICTION PLATES, AND HINGE PLATES THAT CONFORM TO ASTM A-36 AND THAT ARE GALVANIZED IN ACCORDANCE WITH ASTM A-123 PRIOR TO GALVANIZING, GRIND SMOOTH ANY METAL PROJECTION BEYOND THE PLATE FACE. KEEPER PLATES SHALL BE MANUFACTURED FROM 28 GAUGE SHEET STEEL THAT CONFORMS TO ASTM A-36 AND IS GALVANIZED IN ACCORDANCE WITH ASTM A-123
- ASSEMBLE HINGE CONNECTIONS IN THE SHOP. THE SHOP SHALL TIGHTEN BOLTS BY USE OF EITHER A CALIBRATED POWER WRENCH OR A MANUAL TORQUE WRENCH. TIGHTEN EACH HINGE CONNECTION BOLT TO 1/3 PAST SNUG.
- BASE PLATES DETAILS ARE FOR INSTALLATIONS ON THE RIGHT SHOULDER AND IN GORE AREAS.
- ASSEMBLE UPPER SUPPORT TO STUB AS SHOWN IN DETAIL. SLIP BASE PLATES SHALL BE FILLET WELDED ONTO SUPPORTS ALL AROUND THE STRUCTURAL SHAPE SO AS TO INSURE NO LOSS OF STRENGTH. ASSEMBLE IN EITHER SHOP OR FIELD. 28 GAUGE KEEPER PLATE IS PLACED BETWEEN SLIP BASE PLATES TO PREVENT BOLT SLIPPING. TIGHTEN BOLTS TO THE FOLLOWING PRESCRIBED TORQUE:

BOLT DIAMETER	TORQUE (LB. FT.)
1/2"	9
5/8"	22
3/4"	37
1"	48

COMPLETELY ASSEMBLE BREAKAWAY SUPPORTS PRIOR TO ERECTION. BREAKAWAY SUPPORT TO BE SET IN ONE PIECE. AFTER SUPPORT HAS BEEN ERECTED AND THE CONCRETE FOOTINGS HAS CURED AT LEAST 48 HOURS, CLEAN CONCRETE FROM BASE CONNECTION BOLTS THEN LOOSEN AND RE TIGHTEN EACH BOLT IN A SYSTEMATIC ORDER TO THE PRESCRIBED TORQUE. DO NOT OVER TIGHTEN. BURR ALL BOLT THREADS OF BASE CONNECTIONS TO PREVENT LOOSENING.

- ELIMINATE HINGE CONNECTION FOR ALL SINGLE SUPPORT SIGNS.
- DETAIL IS FOR ONE DIRECTION BREAKAWAY. WHEN PLANS REQUIRE A TWO DIRECTION BREAKAWAY, TWO FRICTION PLATES SHALL BE USED IN LIEU OF ONE FRICTION PLATE AND ONE HINGE PLATE.

STATE OF  
NORTH CAROLINA  
DEPT. OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
RALEIGH, N.C.



ROADWAY DETAIL DRAWING FOR  
**GROUND MOUNTED SIGN SUPPORTS**



SHEET 3 OF 3  
**903D1003**



<b>CONTRACTS STANDARDS AND DEVELOPMENT UNIT</b>	
Office 919-707-0950 FAX 919-250-4119	
SEE TITLE BLOCK	
ORIGINAL BY: <u>R.S. GALLO</u> DATE: <u>05-22-2025</u>	MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____	FILE SPEC.: _____

NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
APPROVED: Ashley K. Matthews  
2025060804545  
DATE: 03/04/2026

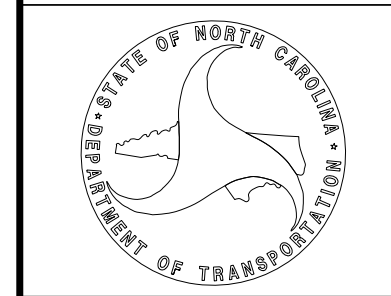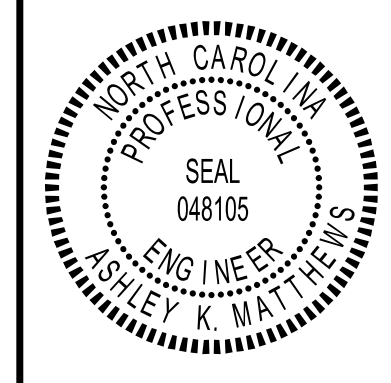

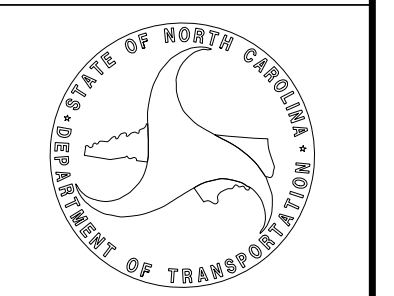
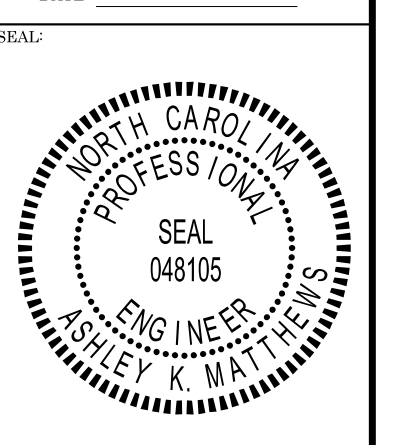


NUMBER	SIGN			ROADWAY STATION	NUMBER OF SUPPORTS	BEAM SECTION	SUPPORT TYPE BA or S	OMNI COUPLER	ATTACHMENT METHOD	MOUNTING METHOD	HORIZONTAL CLEARANCE* (ft.)	SUPPORT SPACING	LENGTH (ft)			LEFT SUPPORT (ft)			CENTER SUPPORT (ft)			RIGHT SUPPORT (ft)			SUPPORT WEIGHTS		FOOTINGS				FIELD VERIFIED SEE NOTE 2 (mm/dd/yy)	
	TYPE	SIZE (in.)											SNS HT	MTG HT	EMBED-MENT	S	L	LENGTH	S	L	LENGTH	S	L	LENGTH	B/A (lbs.)	SIMPLE (lbs.)	DIAMETER (ft.)	DEPTH (ft.)	REINFORCED (c.v.)	PLAIN (c.v.)		
		w	x																													h
101	A	108	x	84	-L- 29+68.84	2	S4x7.7	BA	N/A	N/A	NA	14.00	5.27	7.00	7.00	3.0	0.50	14.50	17.50	0.00	0.00	0.00	0.83	14.83	17.83	312.04	0	1.0	3.5	0.00	0.20	
102	A	114	x	90	-L- 15+25.42	2	S4x7.7	BA	N/A	N/A	NA	14.00	5.57	7.50	7.00	3.5	0.50	15.00	18.50	0.00	0.00	0.00	1.00	15.50	19.00	328.75	0	1.0	4	0.00	0.23	
103	A	84	x	72	-L- 9+78.67	2	S3x5.7	S	N/A	N/A	NA	14.00	4.10	6.00	7.00	2.5	0.65	13.65	16.15	0.00	0.00	0.00	1.00	14.00	16.50	0.00	188.105	1.0	3	0.00	0.17	
104	A	84	x	60	-L- 19+02.77	2	S3x5.7	BA	N/A	N/A	NA	14.00	4.10	5.00	8.00	2.5	-0.65	12.35	14.85	0.00	0.00	0.00	-1.00	12.00	14.50	203.30	0	1.0	3	0.00	0.17	
105	A	72	x	60	-L- 23+55.54	2	S3x5.7	BA	N/A	N/A	NA	14.00	3.52	5.00	7.00	2.5	1.00	13.00	15.50	0.00	0.00	0.00	2.00	14.00	16.50	218.40	0	1.0	3	0.00	0.17	
108A	B	138	x	30	-Y1- 24+99.13	3	W8x12	S	N/A	1-R	NA	22.00	7.48	8.50	8.00	4.0	-0.50	16.00	20.00	-0.65	15.85	19.85	-1.00	15.50	19.50	0.00	712.2	1.5	4.5	0.88	0.00	
108B	A	252	x	102																												
107	A	84	x	72	-L- 35+30.95	2	S3x5.7	BA	N/A	N/A	NA	14.00	4.10	6.00	7.00	2.5	0.50	13.50	16.00	0.00	0.00	0.00	0.60	13.60	16.10	218.97	0	1.0	3	0.00	0.17	

TOTAL	1281.46	898.31	TOTAL	0.88	1.13
USE:	1282.00	899.00	TOTAL	1.00	2.00

NOTES

- DIMENSION "S" REPRESENTS AN INCREASE (+), OR A DECREASE (-) IN POLE LENGTH, RELATIVE TO THE ELEVATION OF THE EDGE OF TRAVEL LANE.
- FIELD VERIFICATIONS SHALL BE REQUIRED FOR ALL SUPPORTS, SEE (\*) ARTICLE 903-3. FABRICATORS SHALL BE AISC CERTIFIED IN CATEGORY 1, SEE (\*) ARTICLE 1072-1. (\*) = N.C.D.O.T. STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES
- PLAN LOCATIONS FOR EXISTING UTILITIES ARE BASED ON THE BEST AVAILABLE INFORMATION AND, THEREFORE MAY NOT BE PRECISELY ACCURATE. THEREFORE, IT IS INCUMBENT UPON THE CONTRACTOR TO DETERMINE THE EXACT LOCATION OF UTILITIES BEFORE BEGINNING WORK IN A LOCATION.

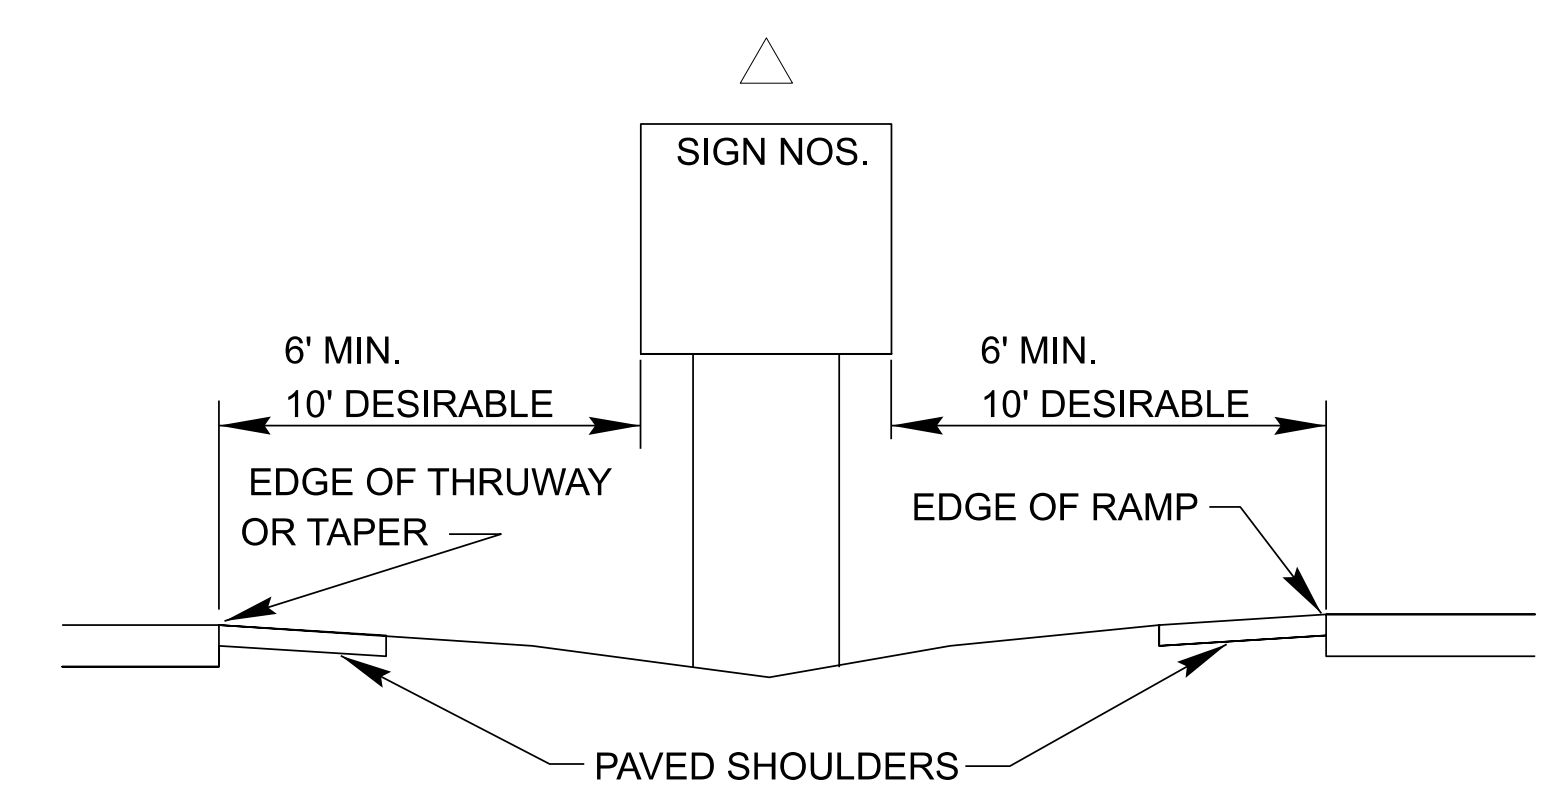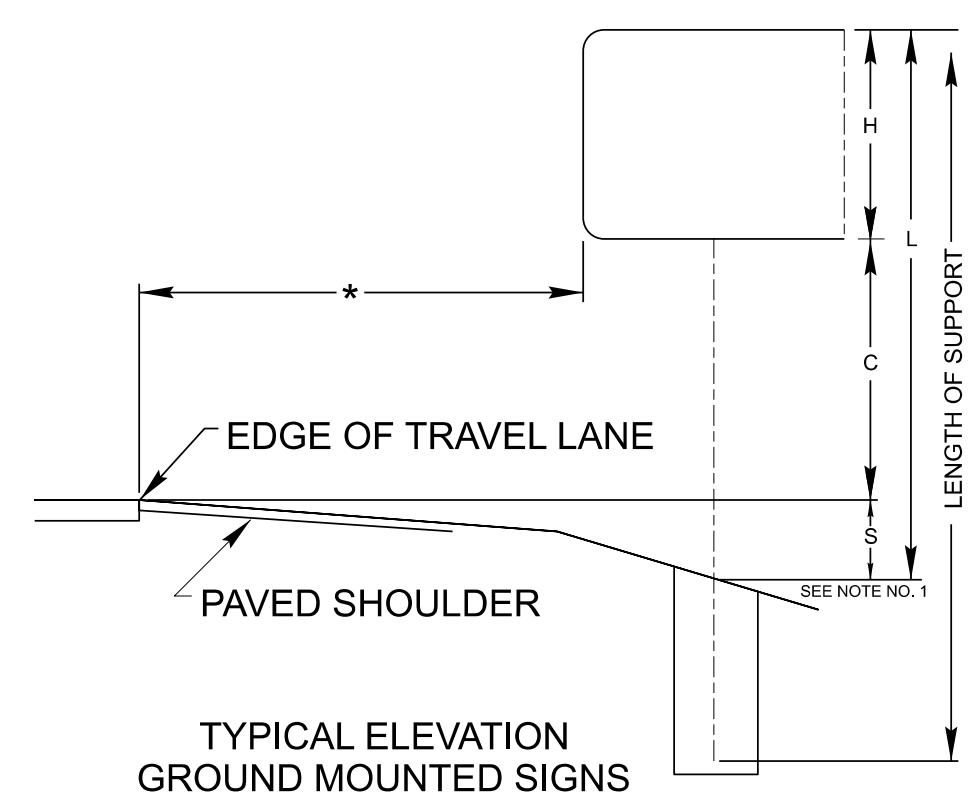

SUPPORT CHART

401 QUANTITY REQ'D 4



36" X 36" X 36"  
R1-2

ONE "U" POST PER SIGN

406 QUANTITY REQ'D 2



48" X 18"  
R6-1R

MOUNT ABOVE SIGN 401  
IN 1 INSTALLATION  
TWO "U" POSTS PER SIGN

411 QUANTITY REQ'D 4



36" X 24"  
R5-1a

ONE "U" POST PER SIGN

501



24" X 12"  
M3-1

24" X 24"  
M1-4

21" X 15"  
M5-1

ONE "U" POST PER SIGN

402 QUANTITY REQ'D 3



36" X 36"  
R5-1

ONE "U" POST PER SIGN

407 QUANTITY REQ'D 2



36" X 36"  
R3-7R

ONE "U" POST PER SIGN

412 QUANTITY REQ'D 1



36" X 36"  
W4-6R

ONE "U" POST PER SIGN

502




24" X 12"  
M3-1

24" X 24"  
M1-4

21" X 15"  
M5-2

ONE "U" POST PER SIGN

403 QUANTITY REQ'D 1

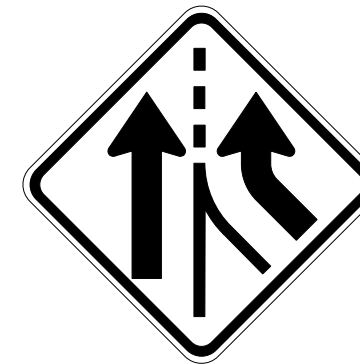

36" X 36"  
W4-3R

ONE "U" POST PER SIGN

408 QUANTITY REQ'D 12



30" X 30"  
W11-2

ONE "OMNI-DIRECTIONAL BREAKWAY SUPPORT"  
AND "ONE STEEL SQUARE TUBE SUPPORT" PER SIGN

413 QUANTITY REQ'D 6



21" X 15"  
W16-7PR

MOUNT BELOW SIGN 408  
IN 6 INSTALLATIONS

503 504




21" X 15"  
M2-1

24" X 24"  
M1-4

ONE "U" POST PER SIGN


404 QUANTITY REQ'D 1

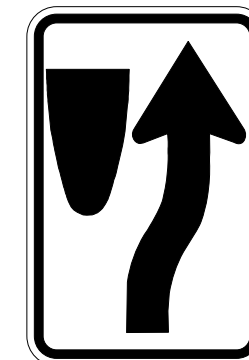

24" X 30"  
R4-7

ONE "OMNI-DIRECTIONAL BREAKWAY SUPPORT"  
AND "ONE STEEL SQUARE TUBE SUPPORT" PER SIGN


409 QUANTITY REQ'D 6



21" X 15"  
W16-7PL

MOUNT BELOW SIGN 408  
IN 6 INSTALLATIONS

414 QUANTITY REQ'D 1



30" X 30"  
R1-1

ONE "U" POST PER SIGN


405 QUANTITY REQ'D 2



30" X 36"  
R2-1

ONE "U" POST PER SIGN


410 QUANTITY REQ'D 1



18" X 30"  
R4-7c



ONE "OMNI-DIRECTIONAL BREAKWAY SUPPORT"  
AND "ONE STEEL SQUARE TUBE SUPPORT" PER SIGN

415 QUANTITY REQ'D 1



30" X 30"  
R3-2

MOUNT BELOW SIGN 414  
IN 1 INSTALLATIONS

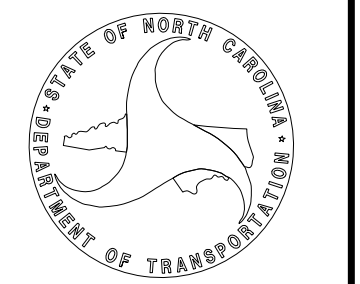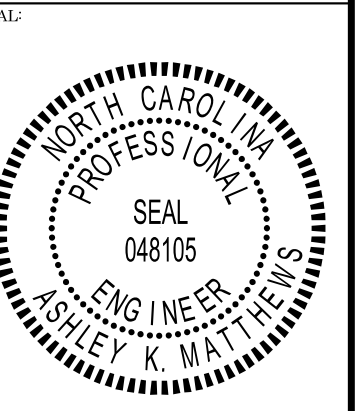


SIGN NUMBER: 101  
TYPE: A  
QUANTITY: 1  
SIGN WIDTH: 8'-6"  
HEIGHT: 7'-0"  
TOTAL AREA: 59.5 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 1-1/2"  
RADIUS: 6"  
NO. Z BARS: 2  
LENGTH: 94.0

BACKG COLOR: Green / Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	34.1	60.1	18	18
AR_Type A	7.7	54.3	10	15.75
M1_4	13.2	18.8	18	18
AR_Type A	75.6	15.8	10	15.75

MATL: 0.125" (3.2 mm) ALUMINUM

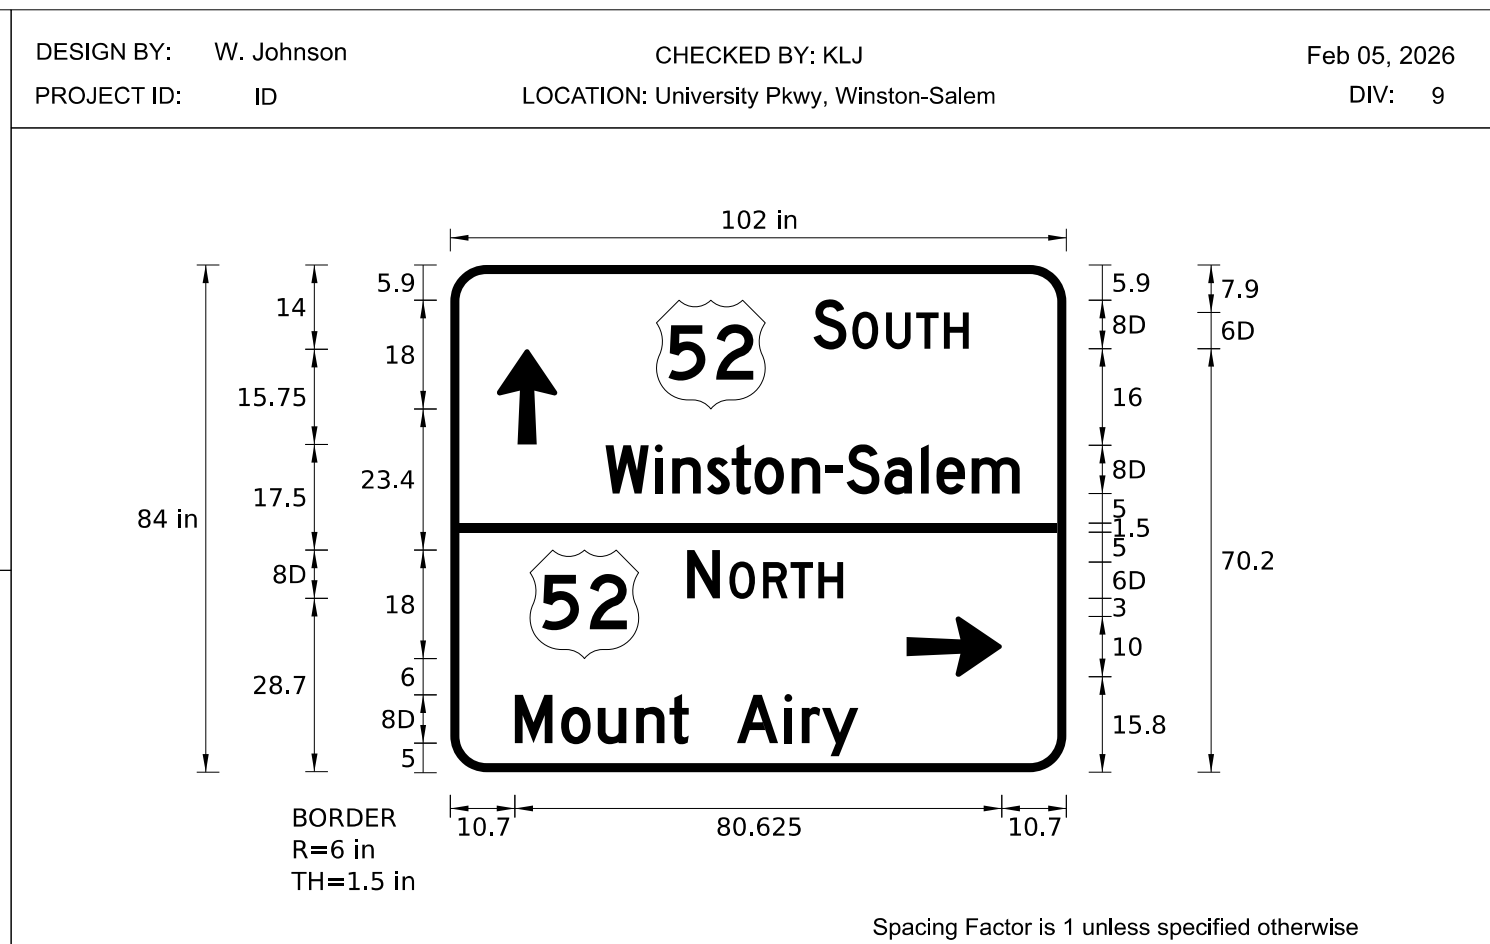

- USE NOTES:
- Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
  - Background shall be Grade C reflective sheeting.
  - Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	Series/Size	Text Length
S O U T H	D 2000	25.7
W I N S T O N - S A L E M	D 2000	68.6
N O R T H	D 2000	25.8
M O U N T	D 2000	25.7
W I N S T O N - S A L E M	D 2000	68.6


BR-0168\_SGN\_SGN\_Signing\_Plans NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 102  
TYPE: A  
QUANTITY: 1  
SIGN WIDTH: 9'-0"  
HEIGHT: 7'-0"  
TOTAL AREA: 63 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 1-1/2"  
RADIUS: 6"  
NO. Z BARS: 2  
LENGTH: 100.0

BACKG COLOR: Green / Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	37.1	60.1	18	18
AR_Type A	16.6	54.3	10	15.75
M1_4	40	18.8	18	18
AR_Type A	7.9	15.8	10	15.75

MATL: 0.125" (3.2 mm) ALUMINUM

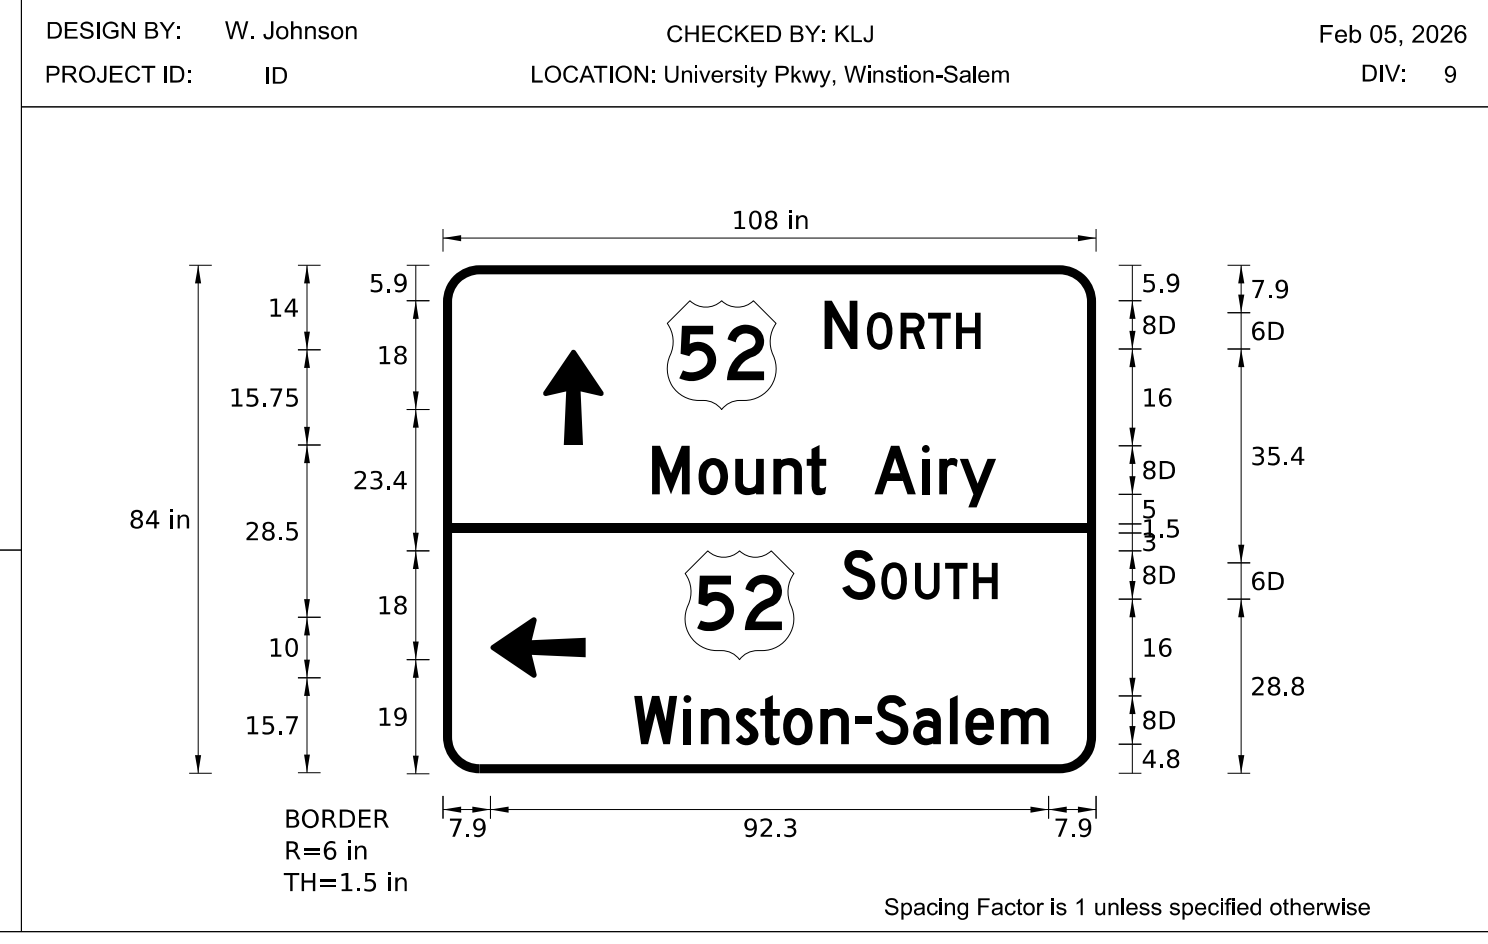

- USE NOTES:
- Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
  - Background shall be Grade C reflective sheeting.
  - Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	Series/Size	Text Length
N O R T H	D 2000	25.8
M O U N T	D 2000	25.7
A I R Y	D 2000	25.7
S O U T H	D 2000	25.8
W I N S T O N - S A L E M	D 2000	68.6


BR-0168\_SGN\_SGN\_Signing\_Plans NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 103  
TYPE: A  
QUANTITY: 1  
SIGN WIDTH: 7'-0"  
HEIGHT: 6'-0"  
TOTAL AREA: 42 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 1-1/2"  
RADIUS: 6"  
NO. Z BARS: 2  
LENGTH: 76.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	33	46.3	18	18

MATL: 0.125" (3.2 mm) ALUMINUM

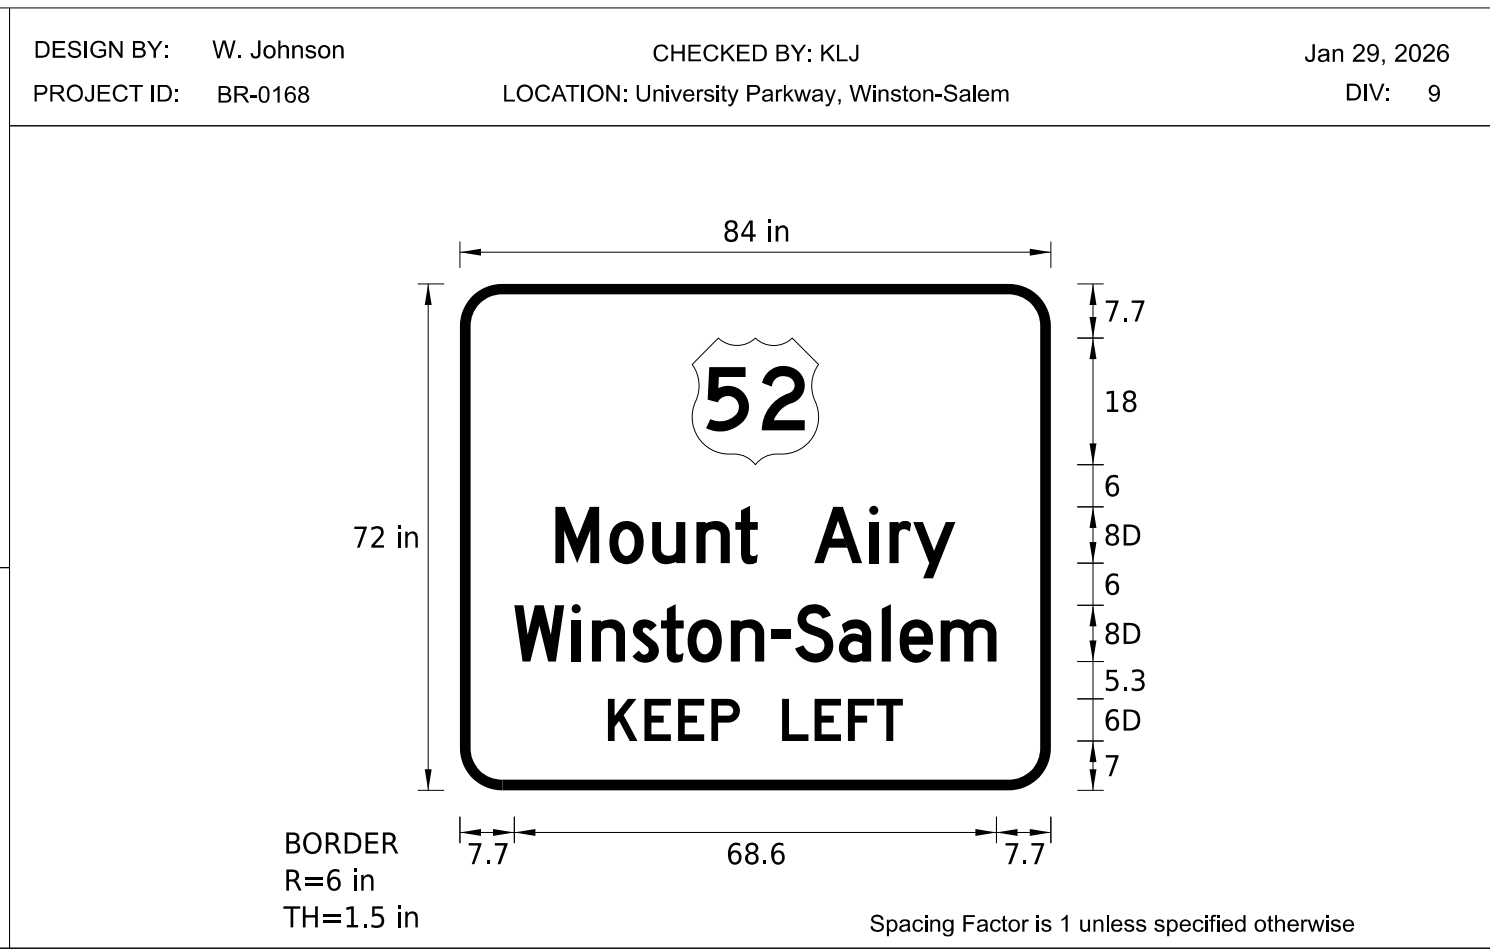

- USE NOTES:
- Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
  - Background shall be Grade C reflective sheeting.
  - Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	Series/Size	Text Length
M O U N T	D 2000	56.875
A I R Y	D 2000	25.7
W I N S T O N - S A L E M	D 2000	68.6
K E E P L E F T	D 2000	42


BR-0168\_SGN\_SGN\_Signing\_Plans NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 104  
TYPE: B  
QUANTITY: 1  
SIGN WIDTH: 7'-0"  
HEIGHT: 5'-0"  
TOTAL AREA: 35 Sq.Ft.  
BORDER TYPE: FLUSH  
RECESS: 0"  
WIDTH: 1-1/2"  
RADIUS: 6"  
NO. Z BARS: 2  
LENGTH: 76.0

BACKG COLOR: Green  
COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	16.1	36.2	18	18
AR_Type A	34.125	6.2	10	15.75

MATL: 0.125" (3.2 mm) ALUMINUM

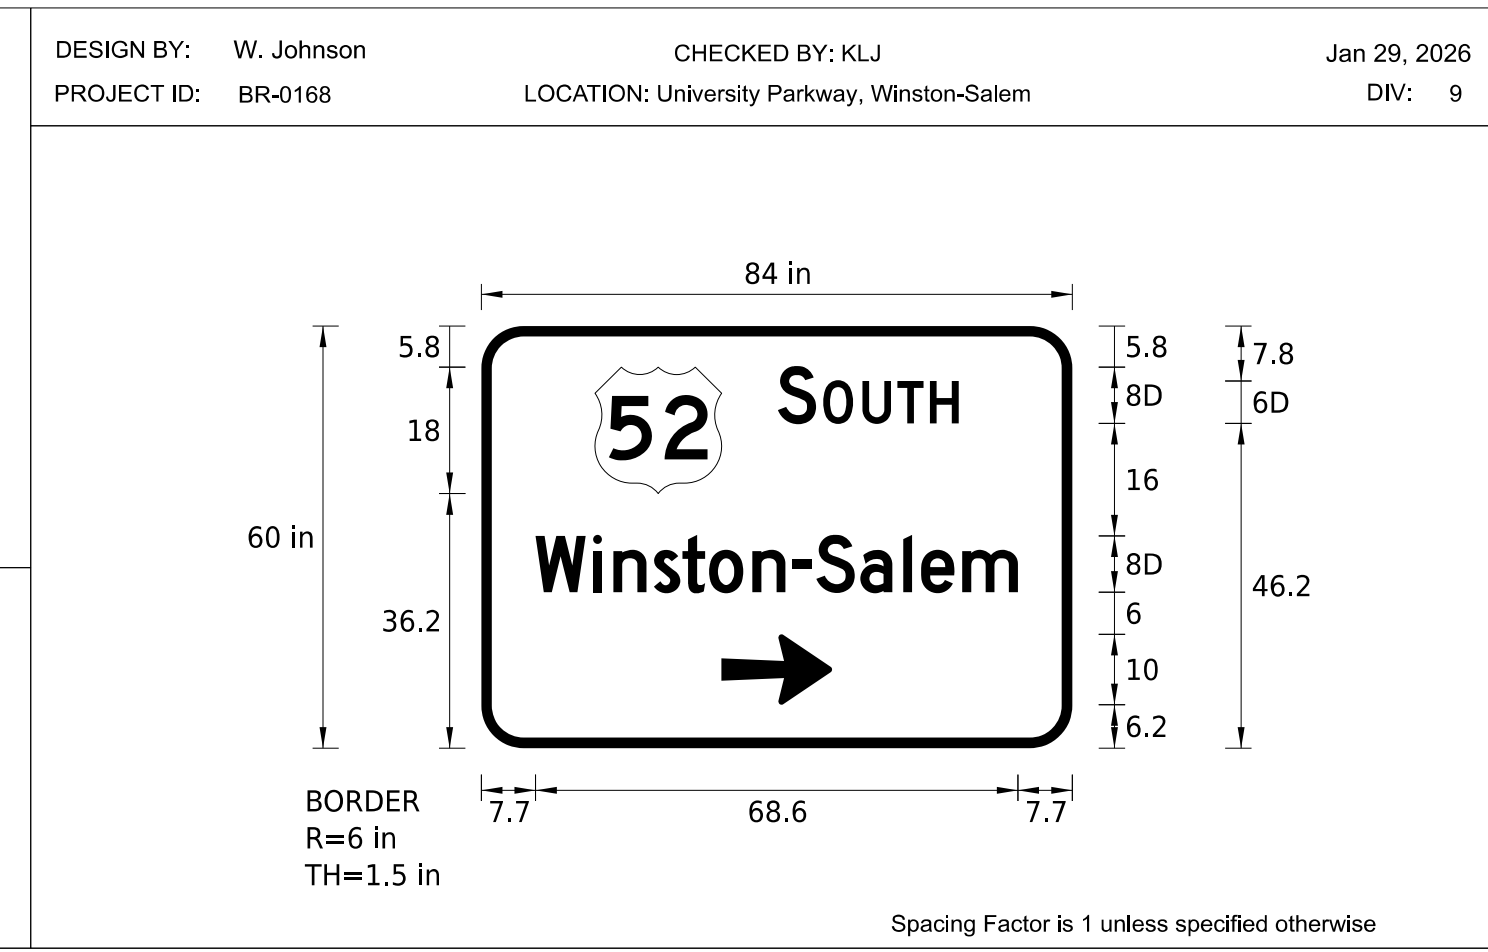

- USE NOTES:
- Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
  - Background shall be Grade C reflective sheeting.
  - Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	Series/Size	Text Length
S O U T H	D 2000	25.7
W I N S T O N - S A L E M	D 2000	68.6

BR-0168\_SGN\_SGN\_Signing\_Plans NORTH CAROLINA D.O.T. SIGN DETAIL

BR-0168  
SIGN 004  
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION  
APPROVED: Ashley K. Matthews  
DATE: 03/04/2026  
SEAL: ASHLEY K. MATTHEWS  
NORTH CAROLINA PROFESSIONAL ENGINEER  
048105

SIGN DESIGNS

SIGN NUMBER: 105  
 TYPE: B  
 QUANTITY: 1  
 SIGN WIDTH: 6'-0"  
 HEIGHT: 5'-0"  
 TOTAL AREA: 30 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 1-1/2"  
 RADII: 6"  
 NO. Z BARS: 2  
 LENGTH: 64.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	10.1	36.2	18	18
AR_Type A	28.125	6.2	10	15.75

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: W. Johnson  
 CHECKED BY: KLJ  
 PROJECT ID: BR-0168  
 LOCATION: University Parkway, Winston-Salem  
 Jan 29, 2026  
 DIV: 9

USE NOTES:  
 1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.  
 2. Background shall be Grade C reflective sheeting.  
 3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	N	O	R	T	H	Series/Size Text Length			
N	36.1	5.4	1.6	5.6	4.6	4.625	4.1	10.1	D 2000
O									25.8
R									D 2000
T									56.875
H									

BR-0168\_SGN\_SGN\_Signing\_Plans  
 NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 106A  
 TYPE: B  
 QUANTITY: 1  
 SIGN WIDTH: 138"  
 HEIGHT: 30"  
 TOTAL AREA: 28.8" Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 1.5"  
 RADII: 6"  
 NO. Z BARS: 2  
 LENGTH: 130.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: W. Johnson  
 CHECKED BY: KLJ  
 PROJECT ID: BR-0168  
 LOCATION: University Parkway, Winston-Salem  
 Jan 15, 2026  
 DIV: 9

USE NOTES:  
 1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.  
 2. Background shall be Grade C reflective sheeting.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	E	X	I	T	1	1	5	3	Series/Size Text Length				
E	22.6"	9"	10.7"	3.5"	7.5"	15"	8"	7.5"	12.2"	7.5"	12.2"	22.6"	E 2000
X													92.9"
I													
T													

BR-0168\_SGN\_SGN\_Signing\_Plans  
 NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 106B  
 TYPE: A  
 QUANTITY: 1  
 SIGN WIDTH: 252"  
 HEIGHT: 102"  
 TOTAL AREA: 178.5" Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 2"  
 RADII: 12"  
 NO. Z BARS: 3  
 LENGTH: 244.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	112.1"	12.4"	22.4"	35.3"

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: W. Johnson  
 CHECKED BY: KLJ  
 PROJECT ID: BR-0168  
 LOCATION: University Parkway, Winston-Salem  
 Jan 15, 2026  
 DIV: 9

USE NOTES:  
 1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.  
 2. Background shall be Grade C reflective sheeting.  
 3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

Letter	U	n	i	v	e	r	s	i	t	y	P	k	w	y	Series/Size Text Length			
U	19.8"	18.4"	17"	7.8"	15.5"	15.5"	10.1"	15.5"	8"	11.7"	13.6"	16"	16.8"	13.8"	19.2"	13.6"	19.8"	EM 2000
n																		212.5"
i																		D 2000
v																		56.875
e																		
r																		D 2000
s																		47.6"
i																		
t																		
y																		

BR-0168\_SGN\_SGN\_Signing\_Plans  
 NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 107  
 TYPE: A  
 QUANTITY: 1  
 SIGN WIDTH: 7'-0"  
 HEIGHT: 6'-0"  
 TOTAL AREA: 42 Sq.Ft.  
 BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 1-1/2"  
 RADII: 6"  
 NO. Z BARS: 2  
 LENGTH: 76.0

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
M1_4	33	46.3	18	18

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: W. Johnson  
 CHECKED BY: KLJ  
 PROJECT ID: BR-0168  
 LOCATION: University Parkway, Winston-Salem  
 Jan 29, 2026  
 DIV: 9

USE NOTES:  
 1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.  
 2. Background shall be Grade C reflective sheeting.  
 3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter



Letter	w	i	n	s	t	o	n	-	s	a	l	e	m	Series/Size Text Length			
w	7.7	8.2	2.875	5.75	4.1	3.8	6.2	5.7	3.4	6.25	6.1	2.6	5.8	8	7.7	D 2000	
i																	68.6
n																	D 2000
s																	56.875
t																	
o																	D 2000
n																	46.25
-																	
s																	
a																	
l																	
e																	
m																	

BR-0168\_SGN\_SGN\_Signing\_Plans  
 NORTH CAROLINA D.O.T. SIGN DETAIL


BR-0168  
 SIGN 04A  
 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION  
 Approved by: Ashley & Matthews  
 DATE: 03/04/2026  
 SEAL: NORTH CAROLINA PROFESSIONAL SEAL 048105 ASHLEY K. MATTHEWS  
 SEAL: STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION





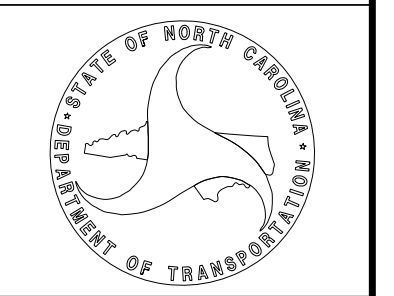
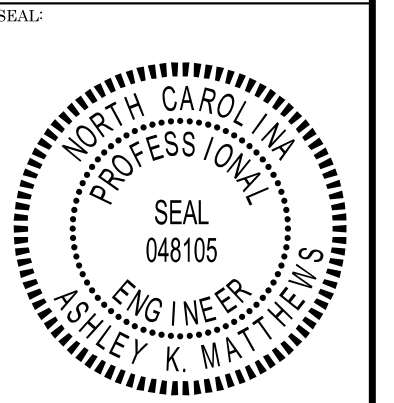


# Existing Signs

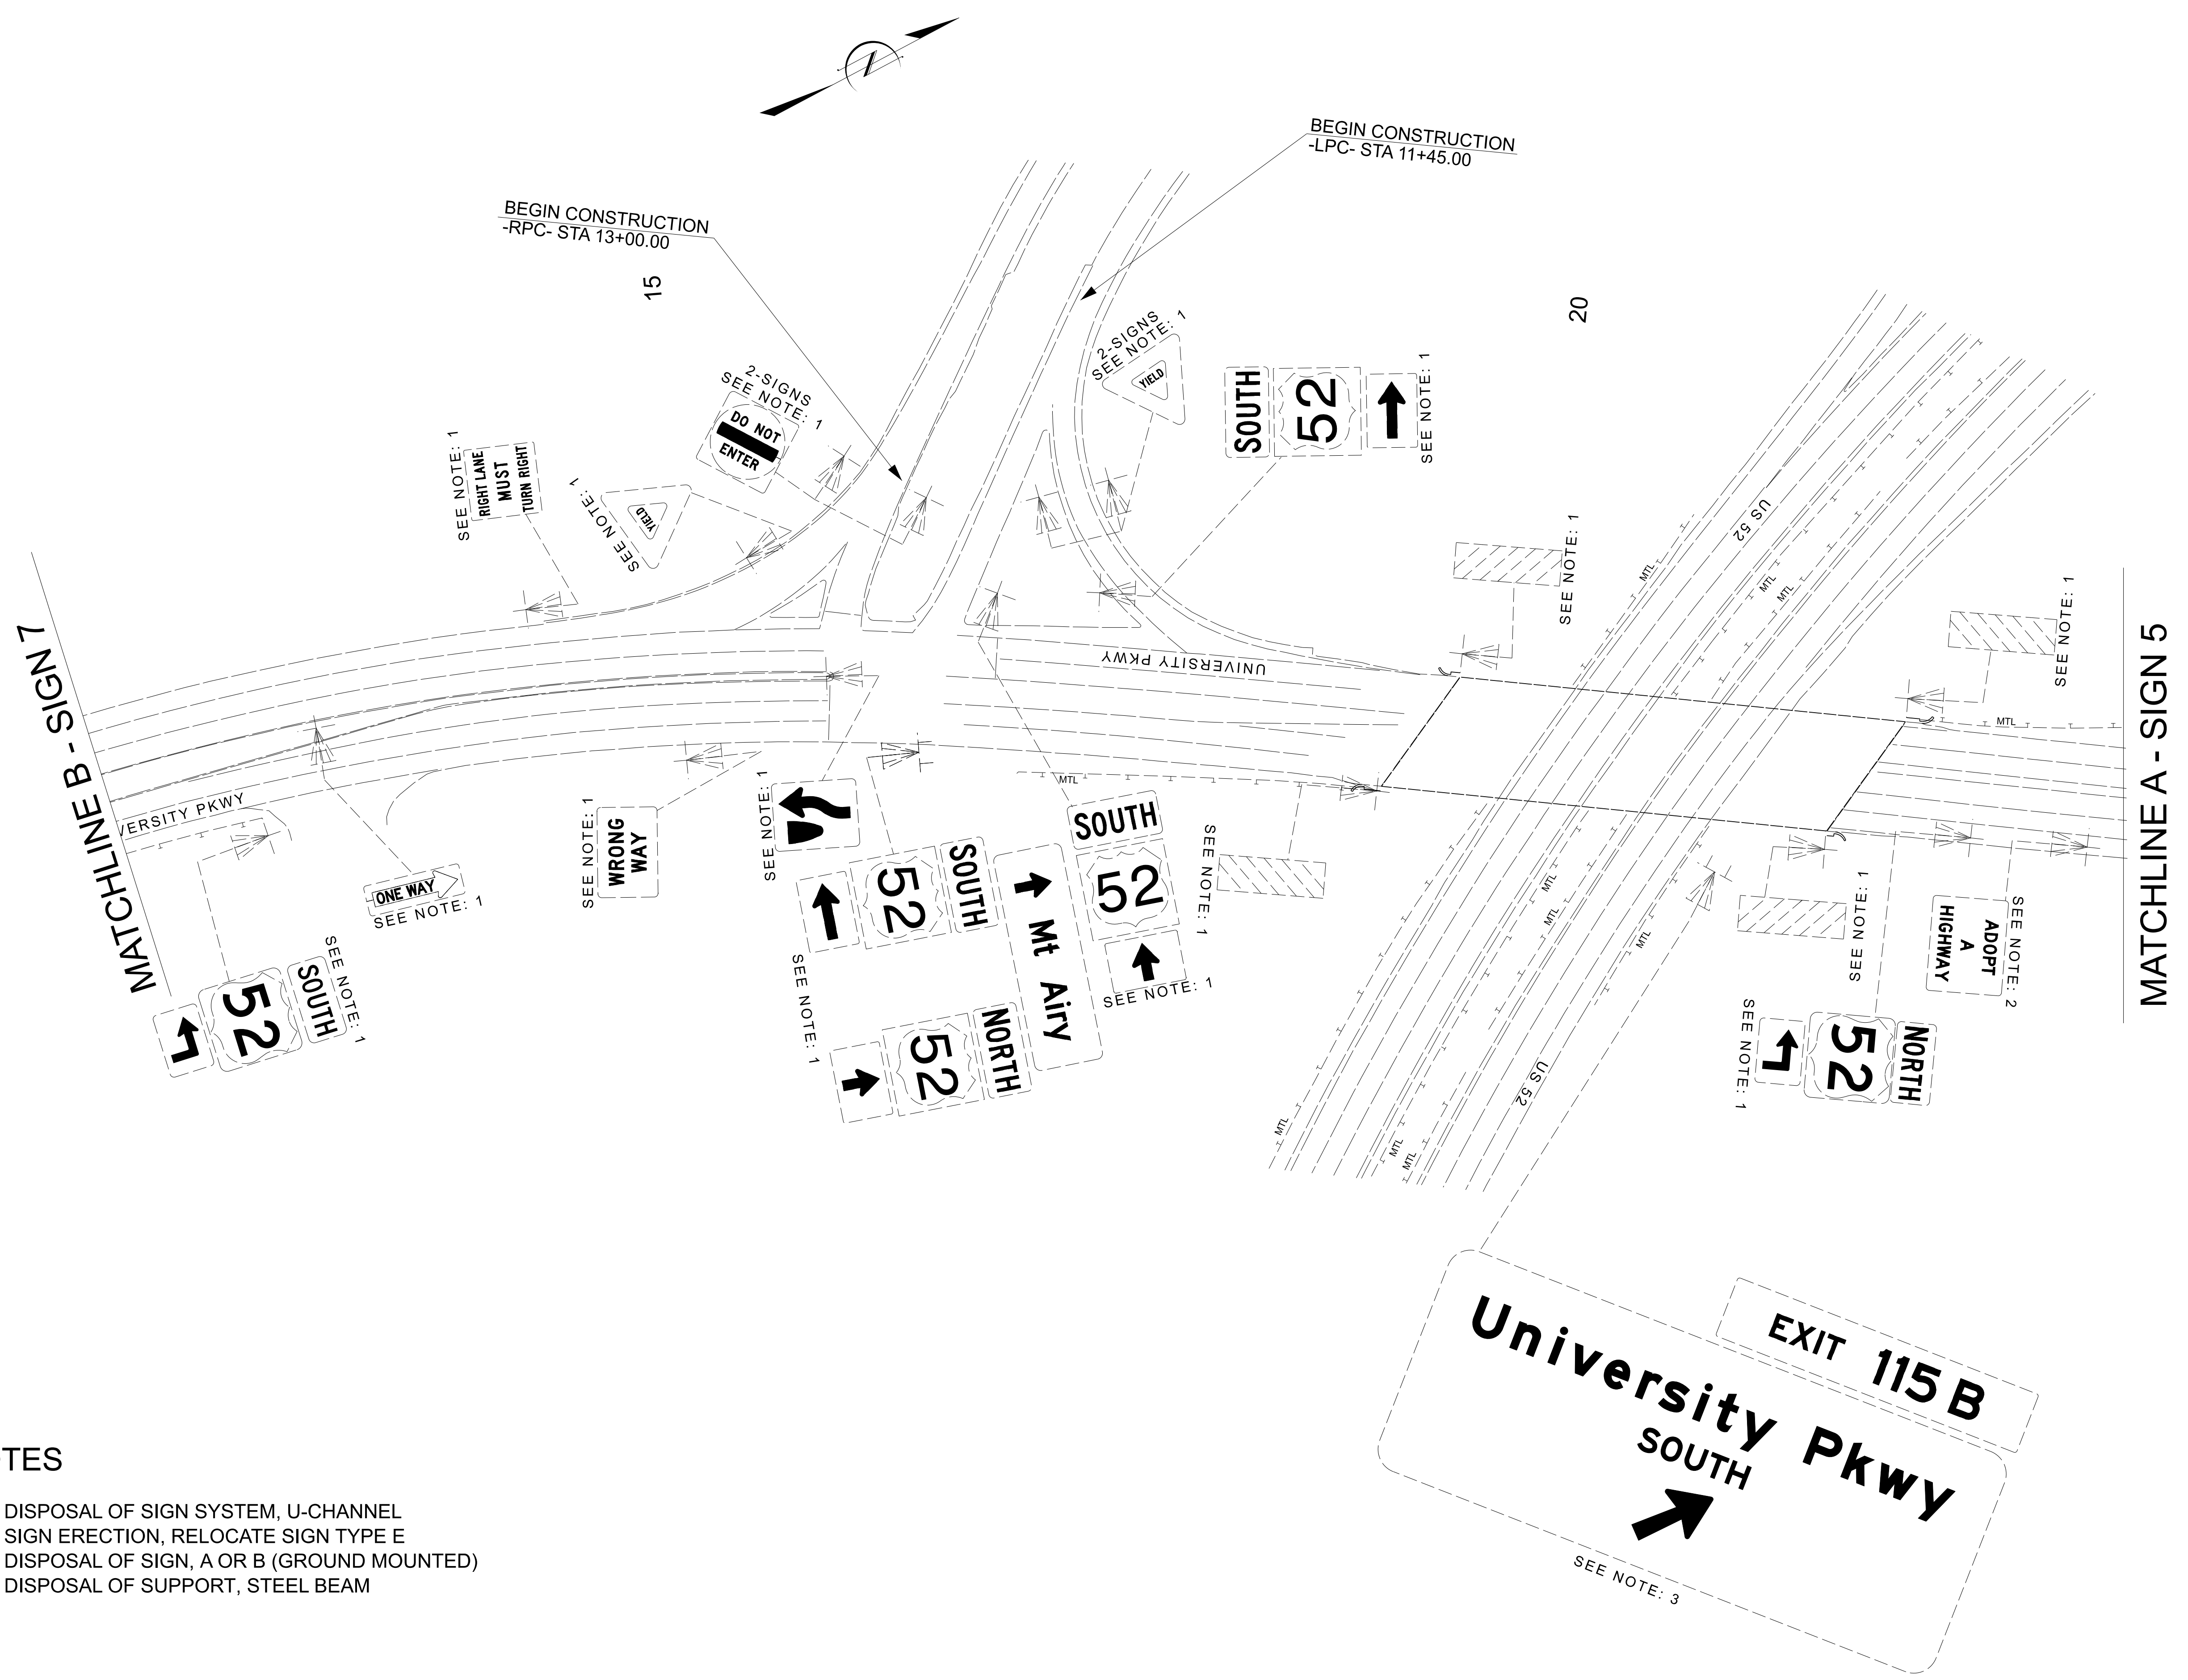


### NOTES

- 1 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 2 SIGN ERECTION, RELOCATE SIGN TYPE E
- 3 DISPOSAL OF SIGN, A OR B (GROUND MOUNTED)
- 4 DISPOSAL OF SUPPORT, STEEL BEAM

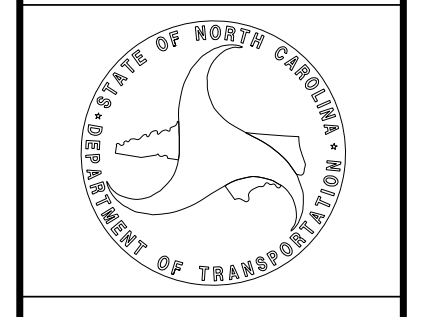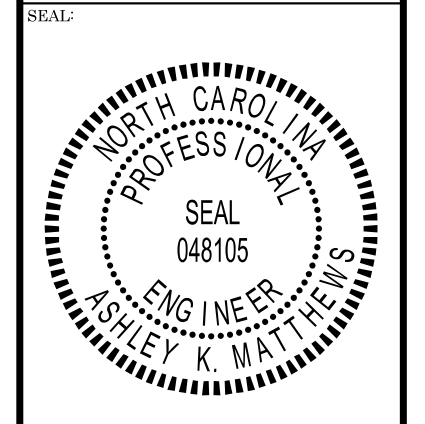


# Existing Signs

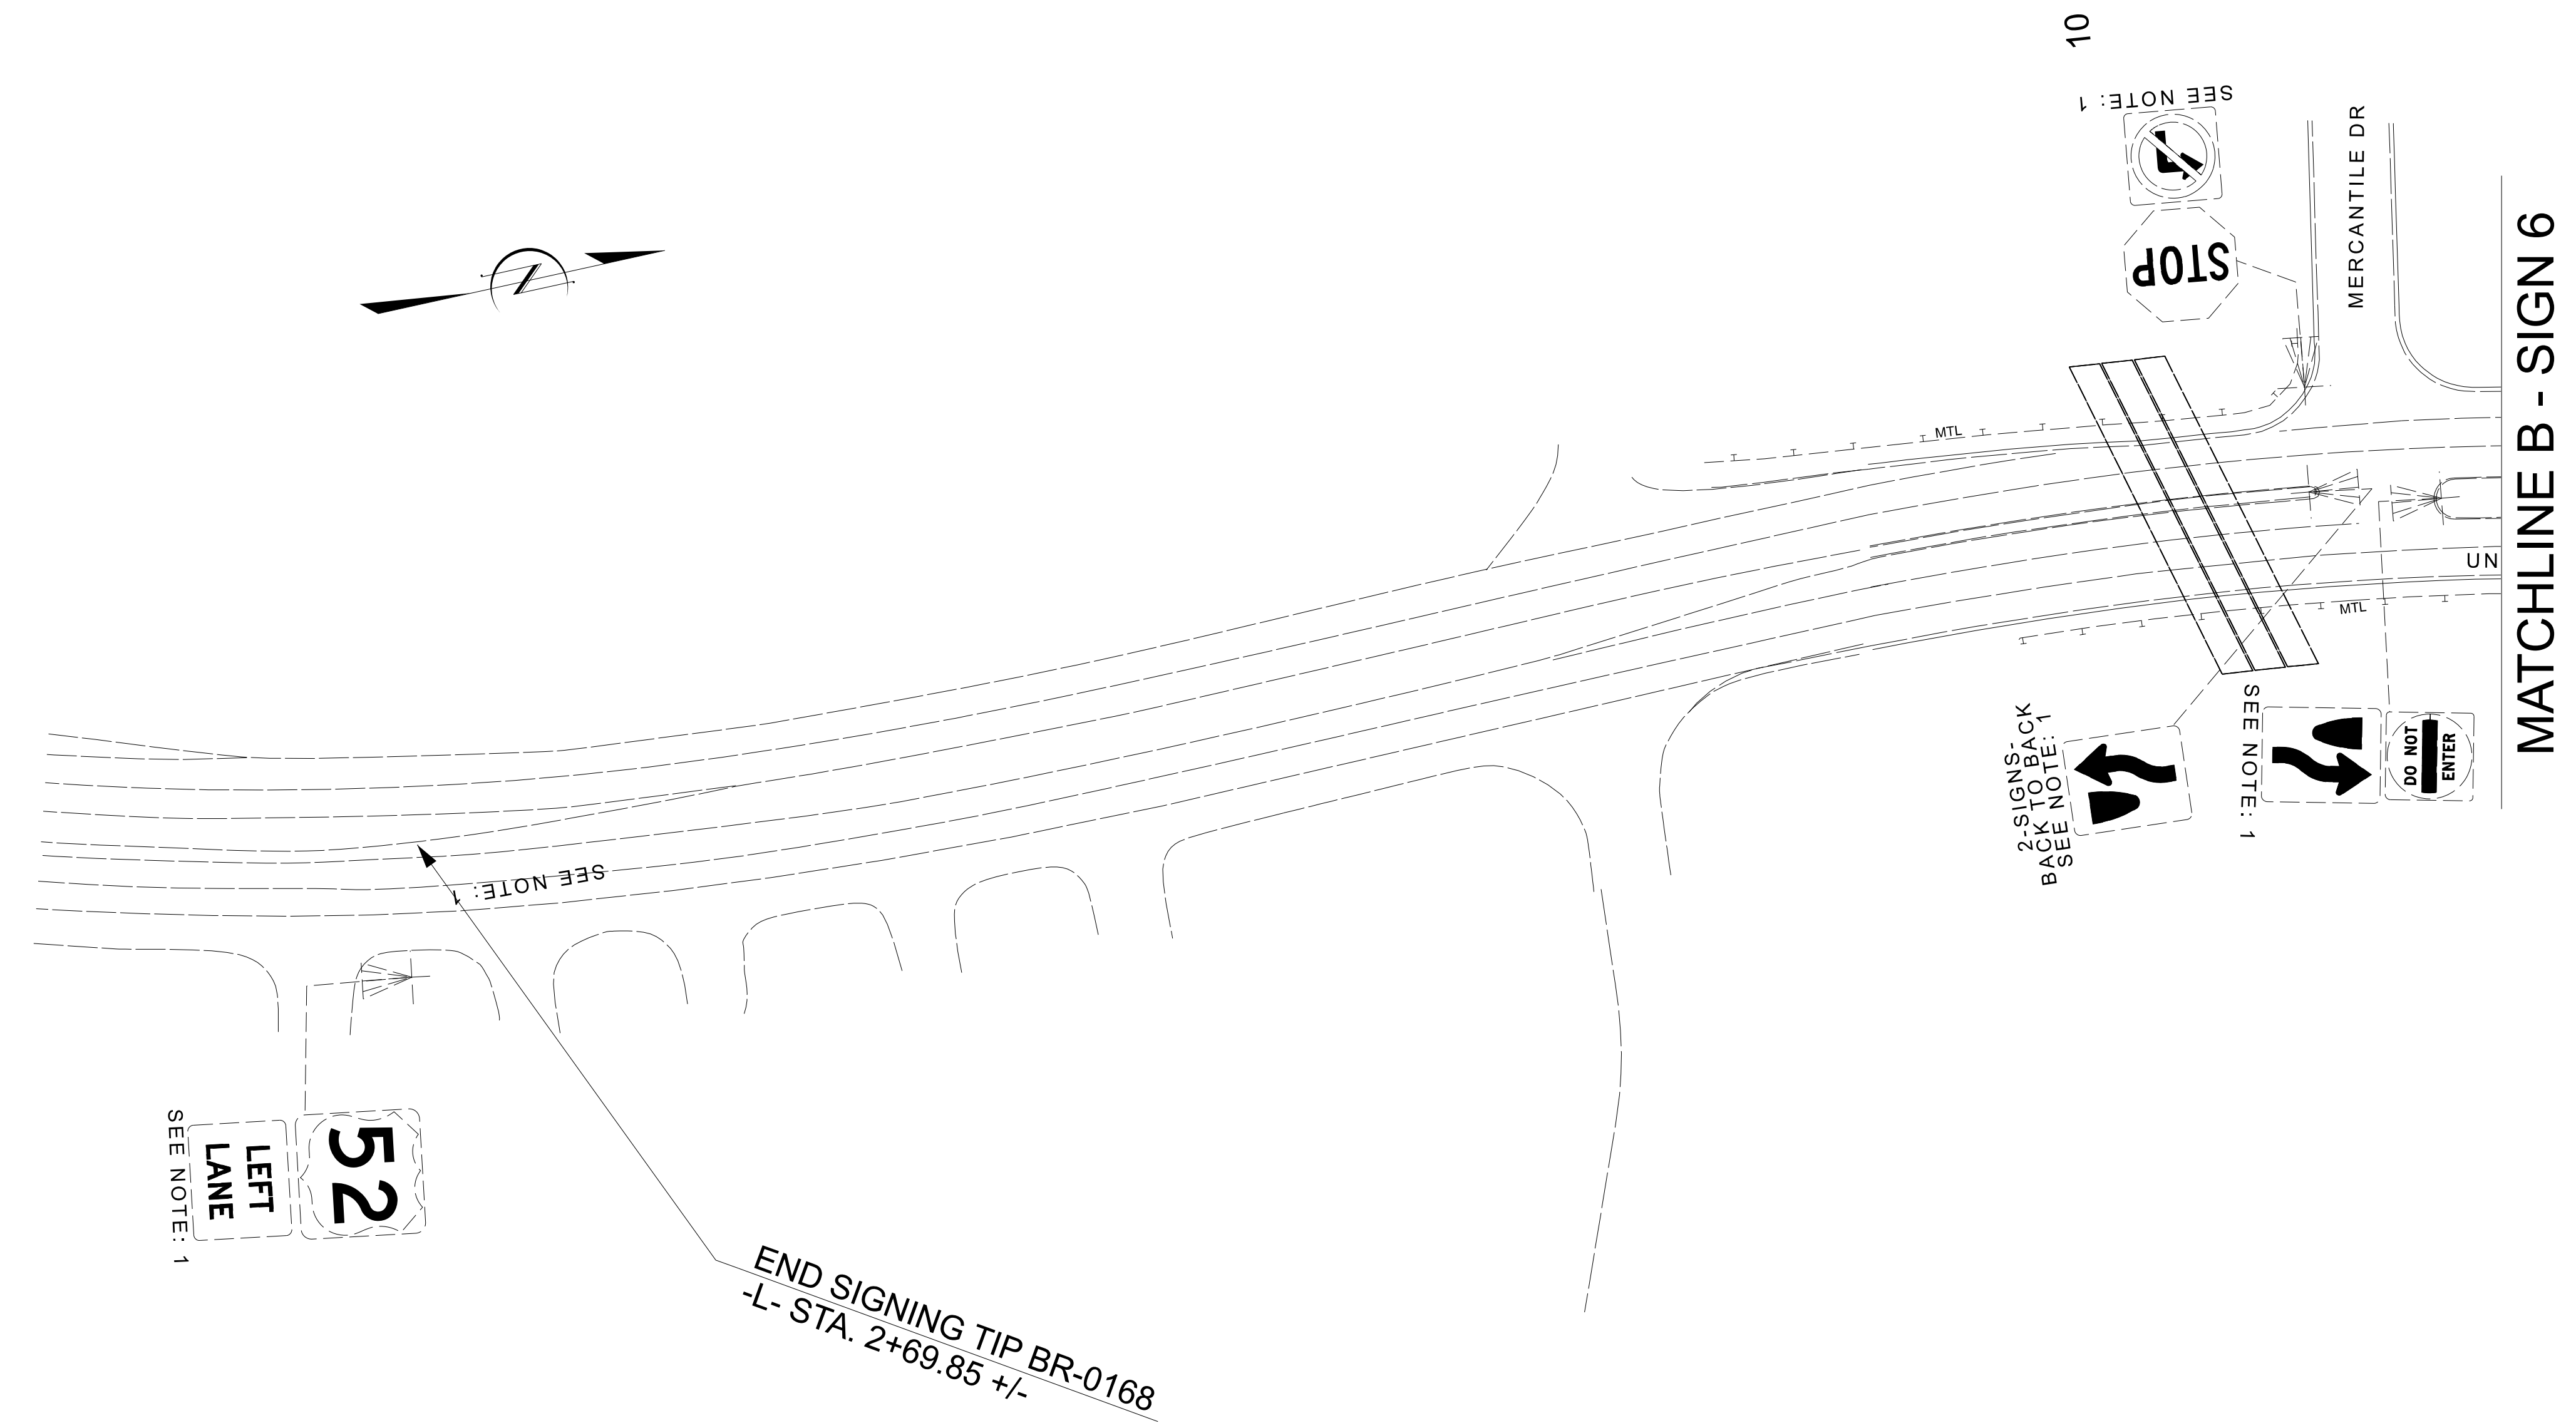

## NOTES

- 1 DISPOSAL OF SIGN SYSTEM, U-CHANNEL

MATCHLINE SIGN-9 -L-19+06.22

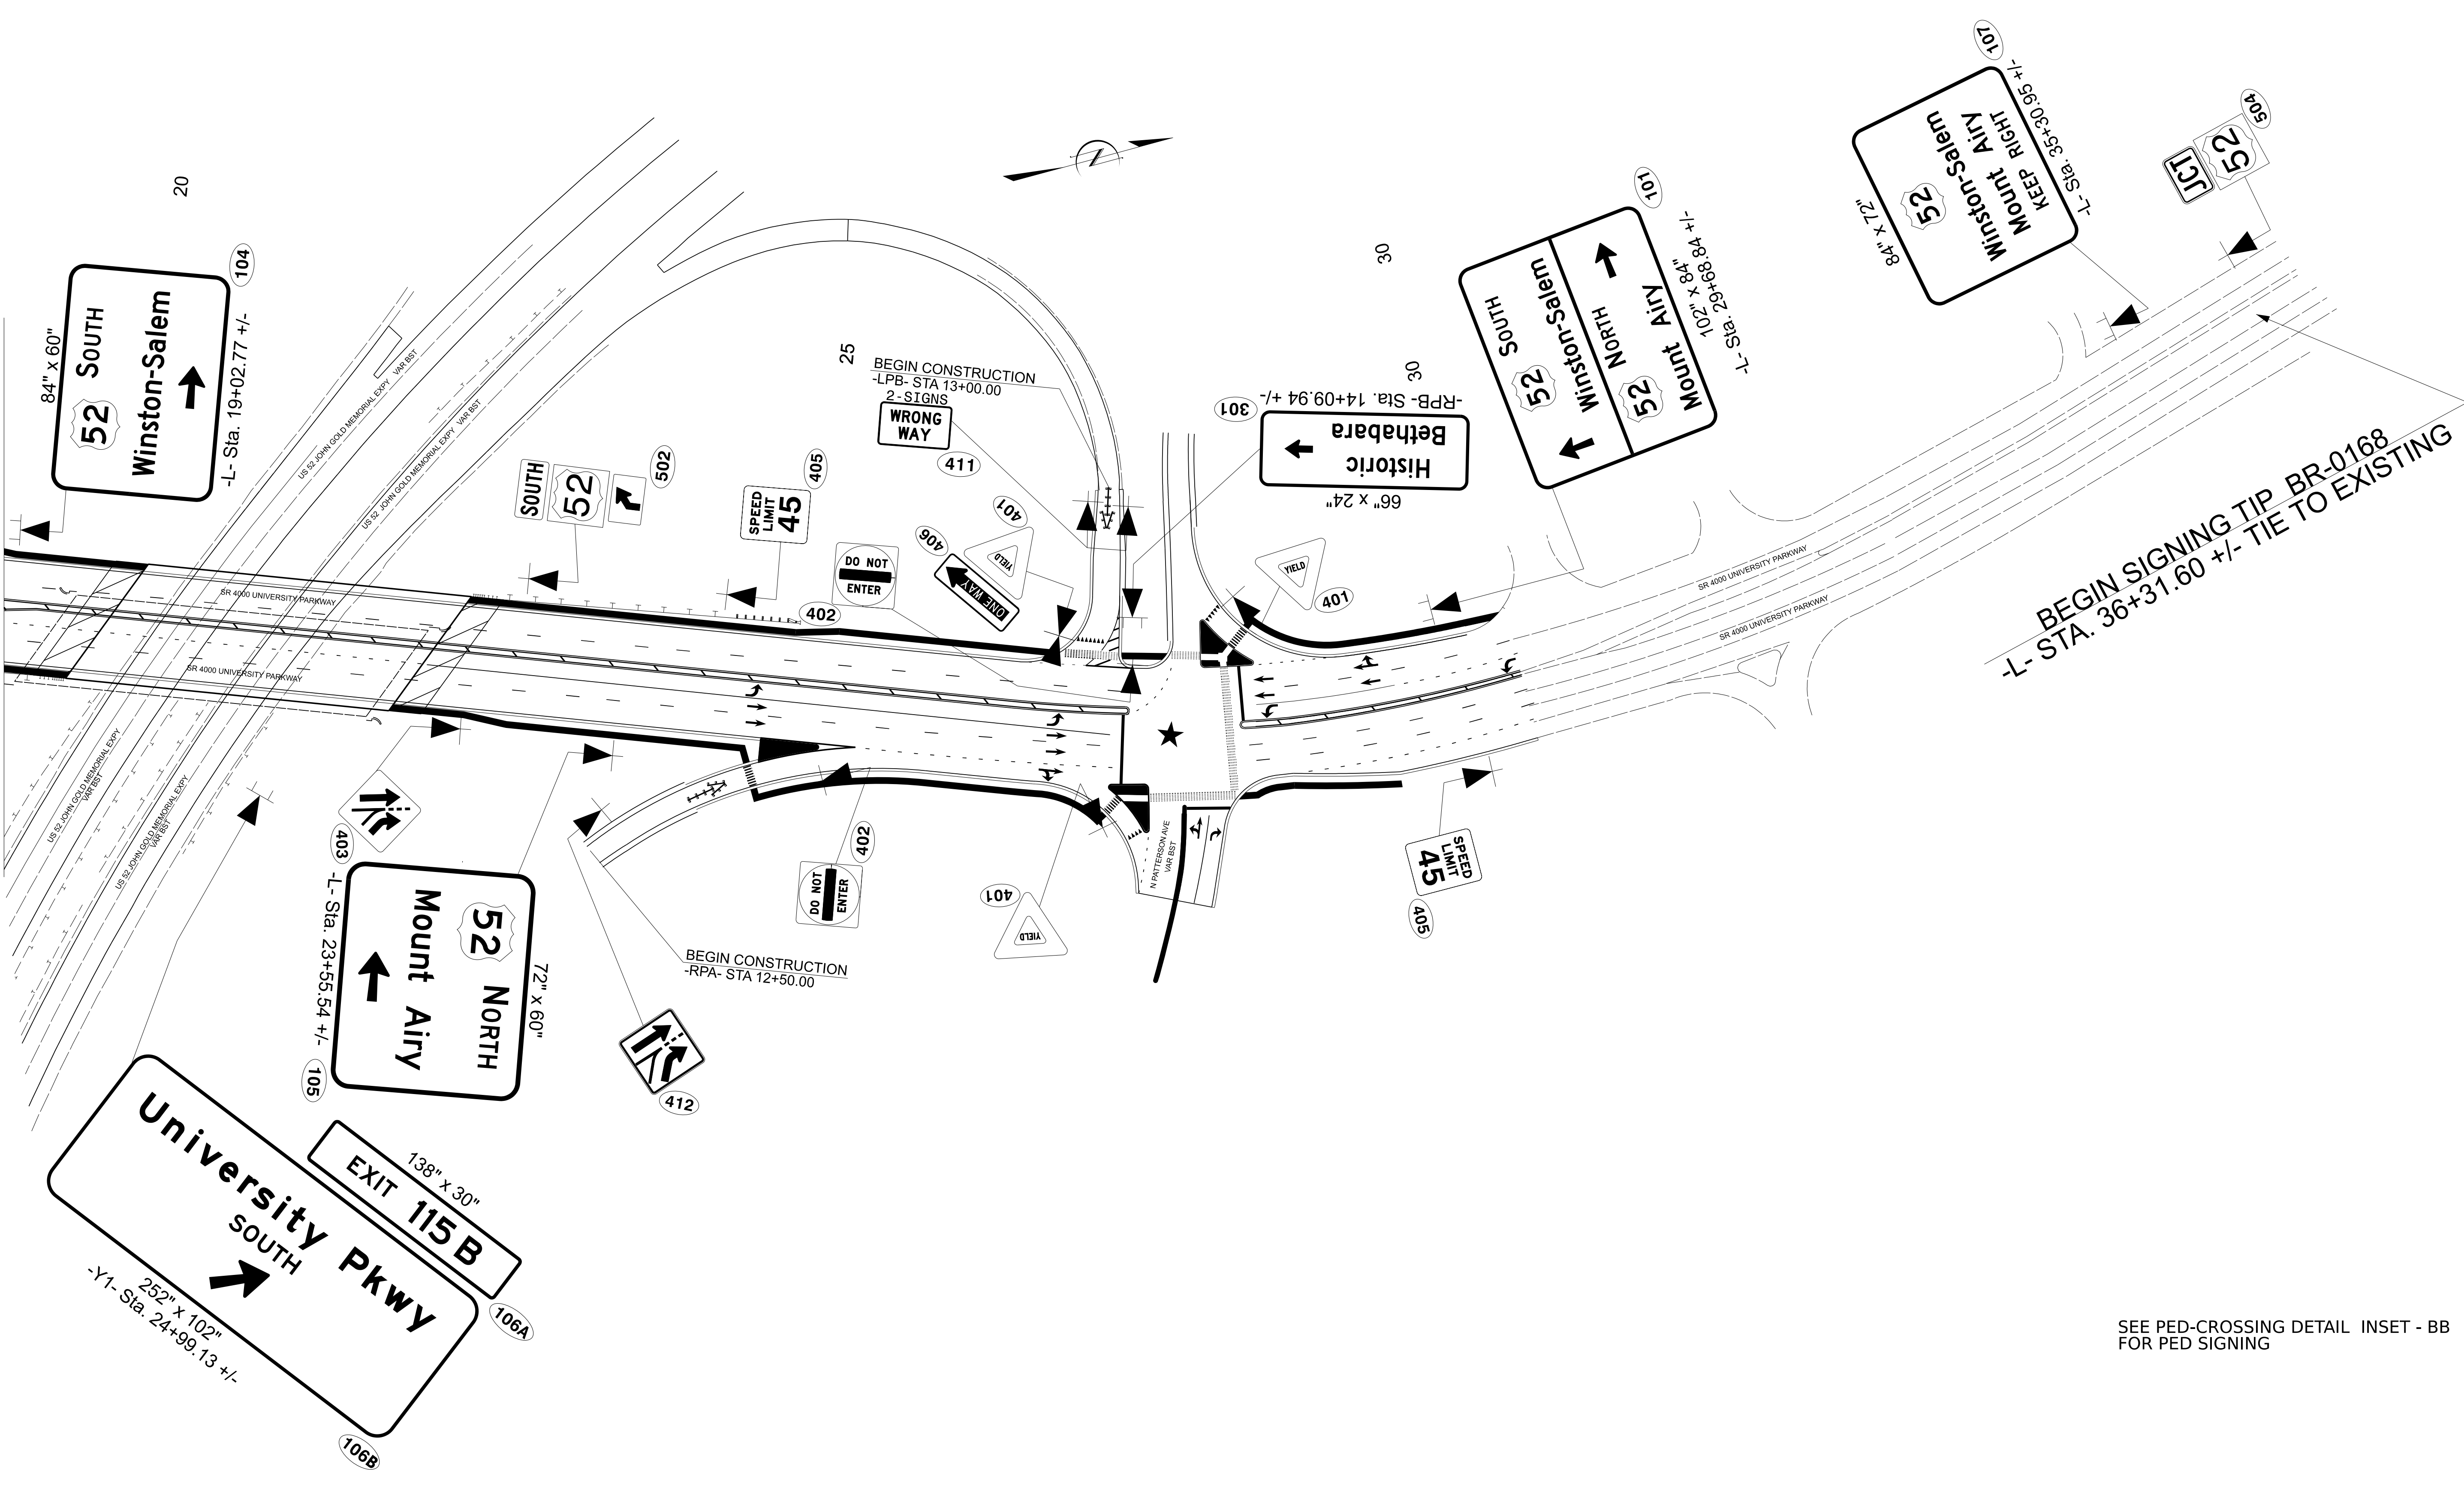


BEGIN SIGNING TIP BR-0168  
-L- STA. 36+31.60 +/- TIE TO EXISTING



SEE PED-CROSSING DETAIL INSET - BB  
FOR PED SIGNING

BR-0168  
SIGN 008  
NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
APPROVED: *Abiley E. Matthews*  
DATE: 03/04/2026  
SEAL  
INCOMPLETE PLANS  
DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

# Proposed Signs

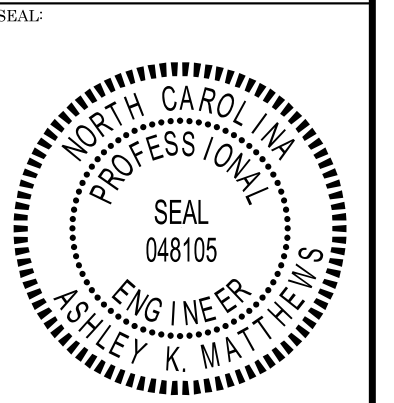

INCOMPLETE PLANS DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

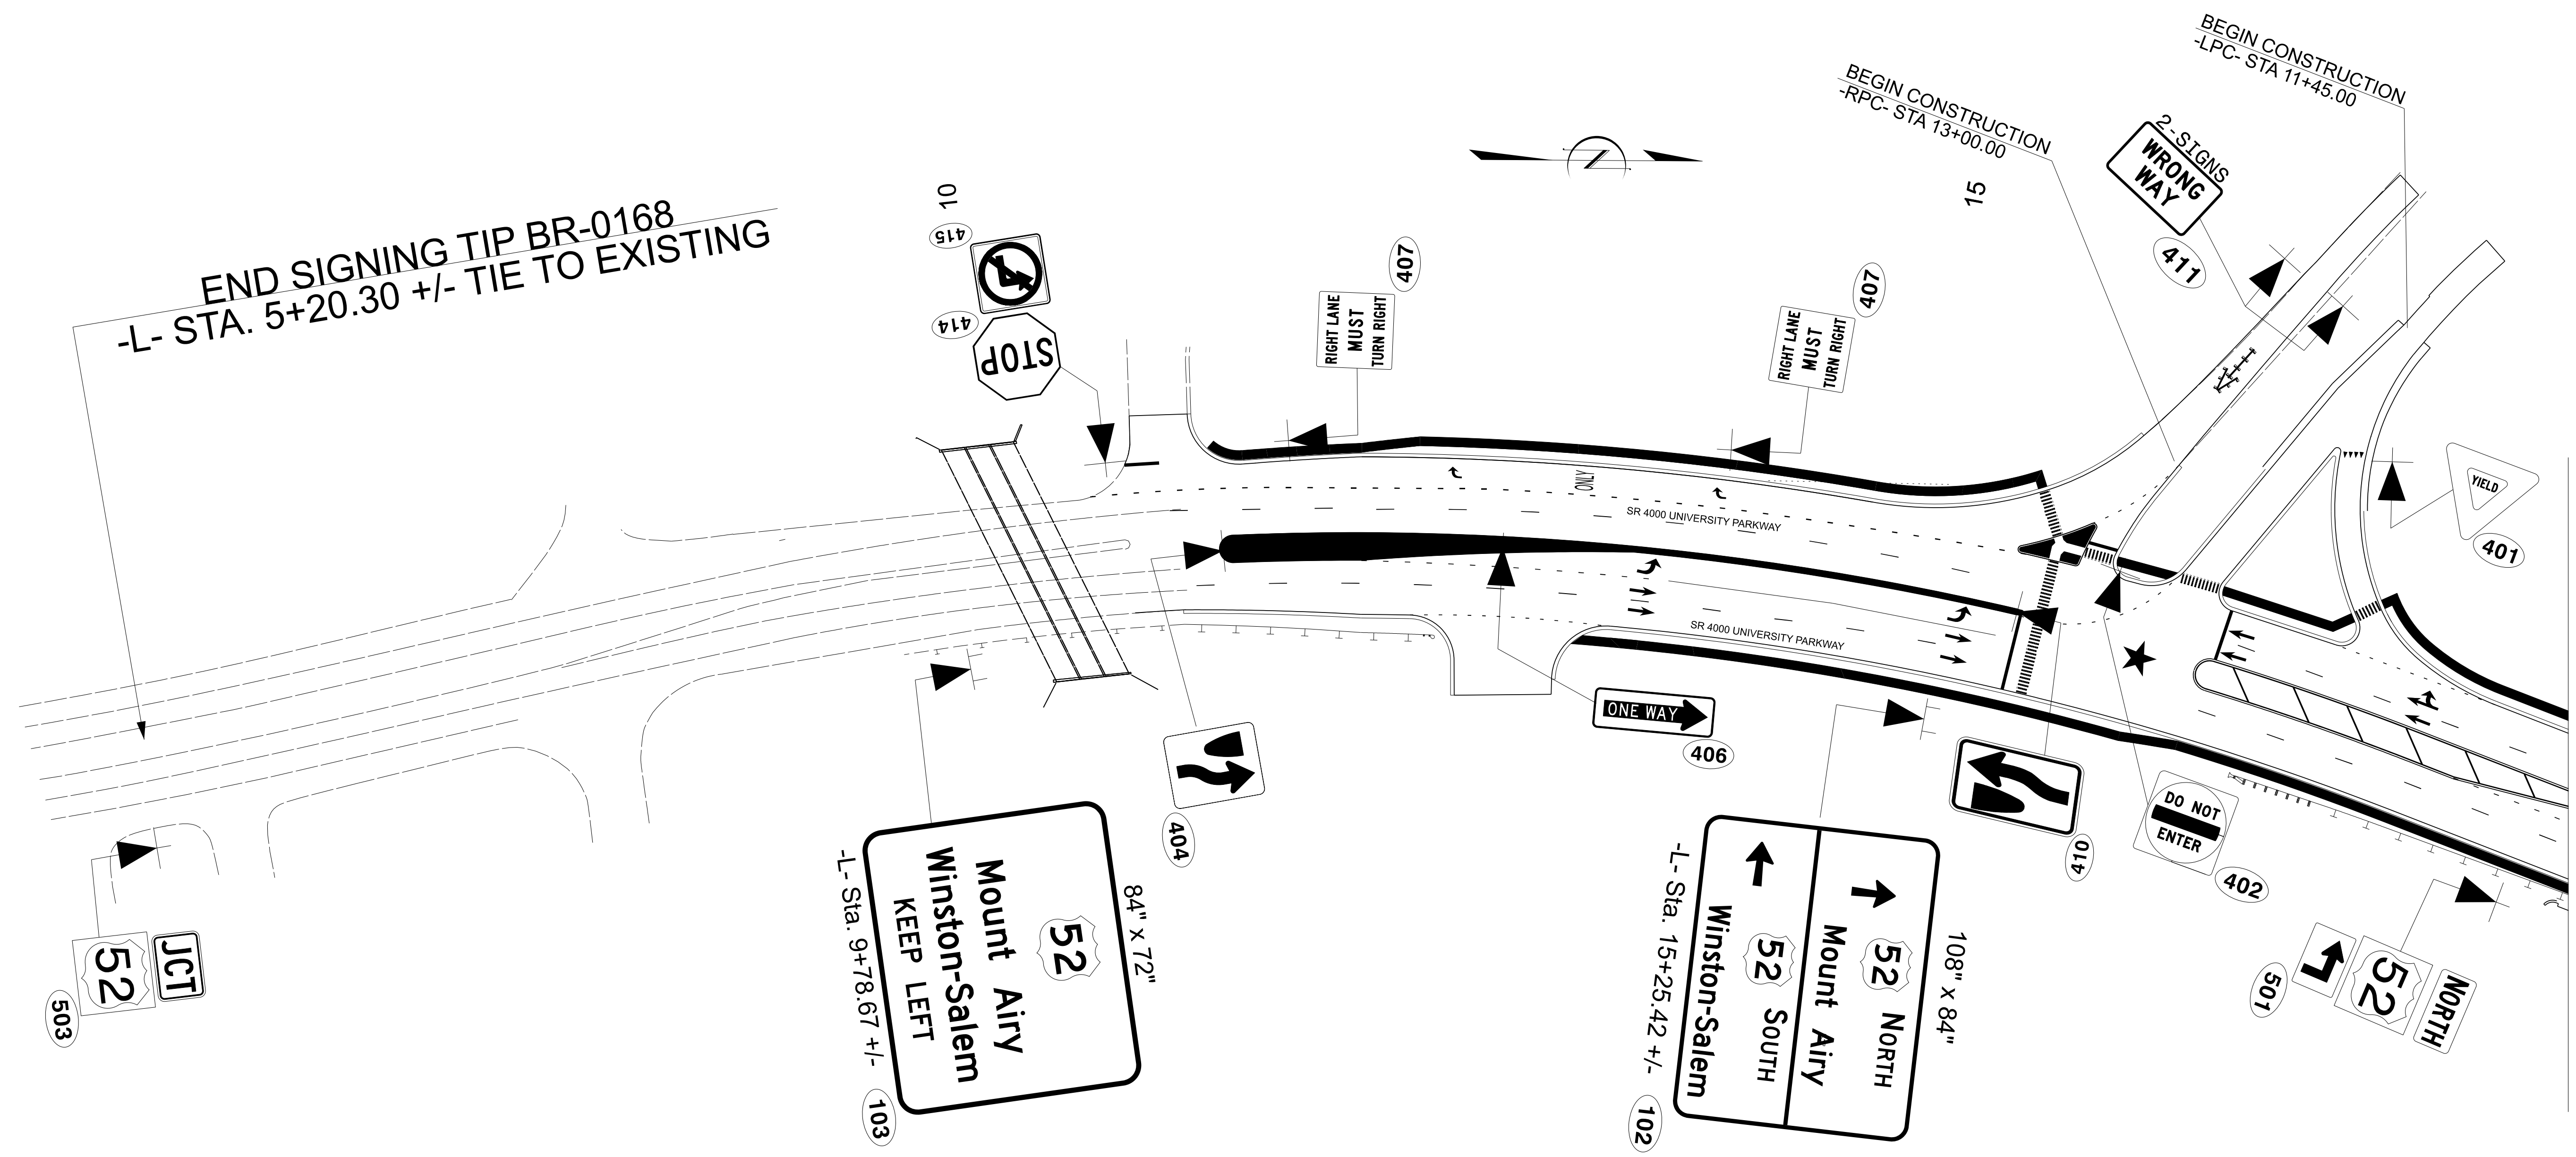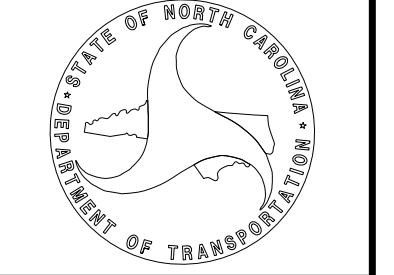


SEE PED-CROSSING DETAIL INSET - AA FOR PED SIGNING

# Proposed Signs


5/26/20

# INSET - AA


10

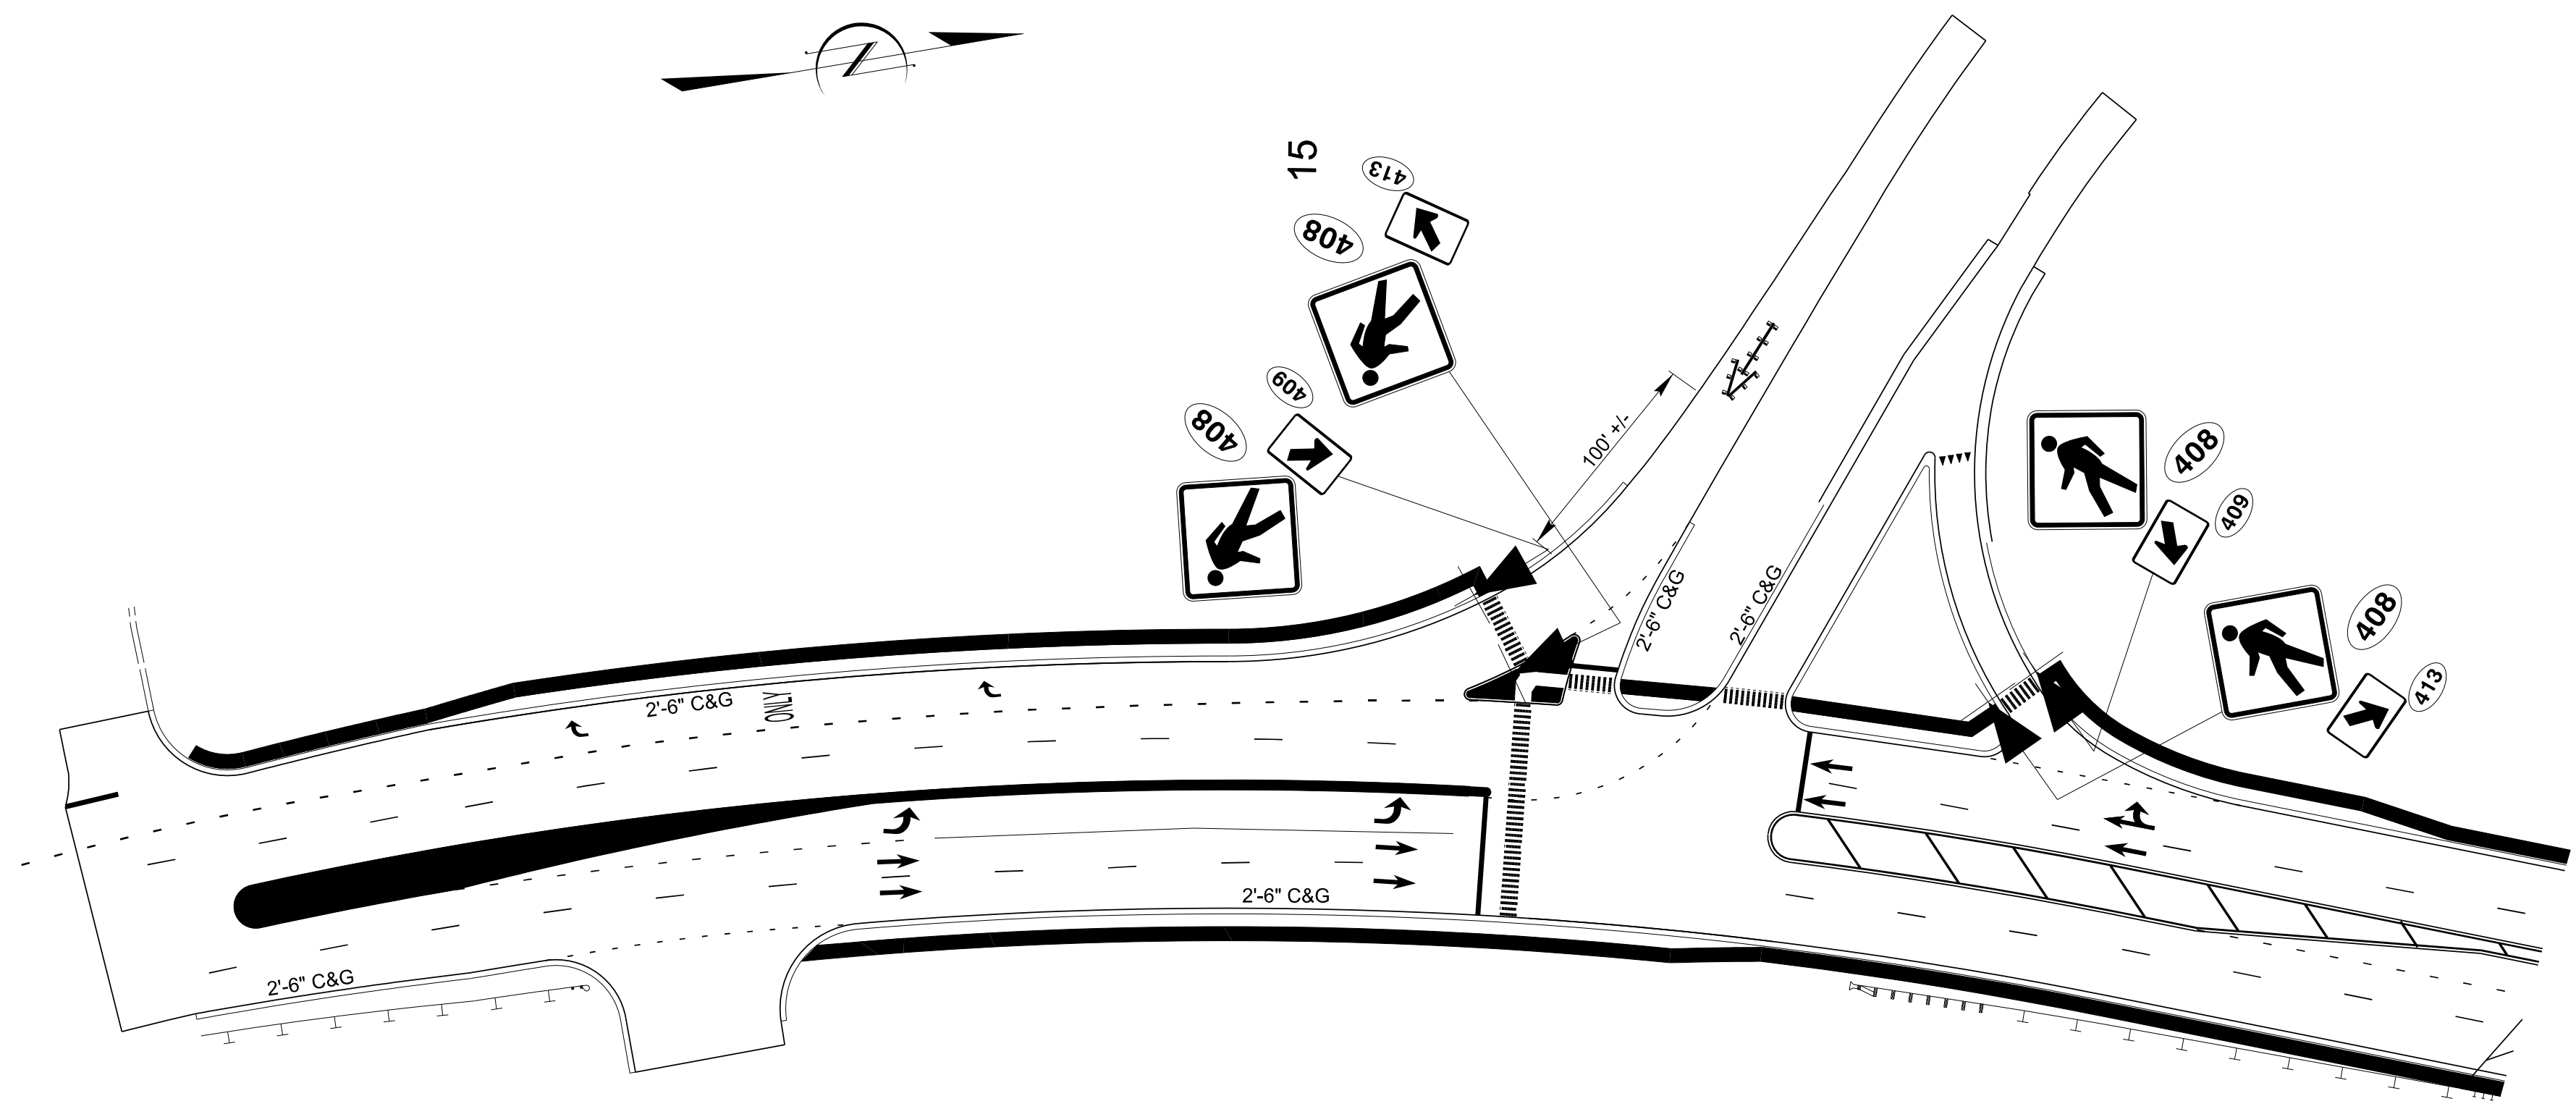

# INSET - BB

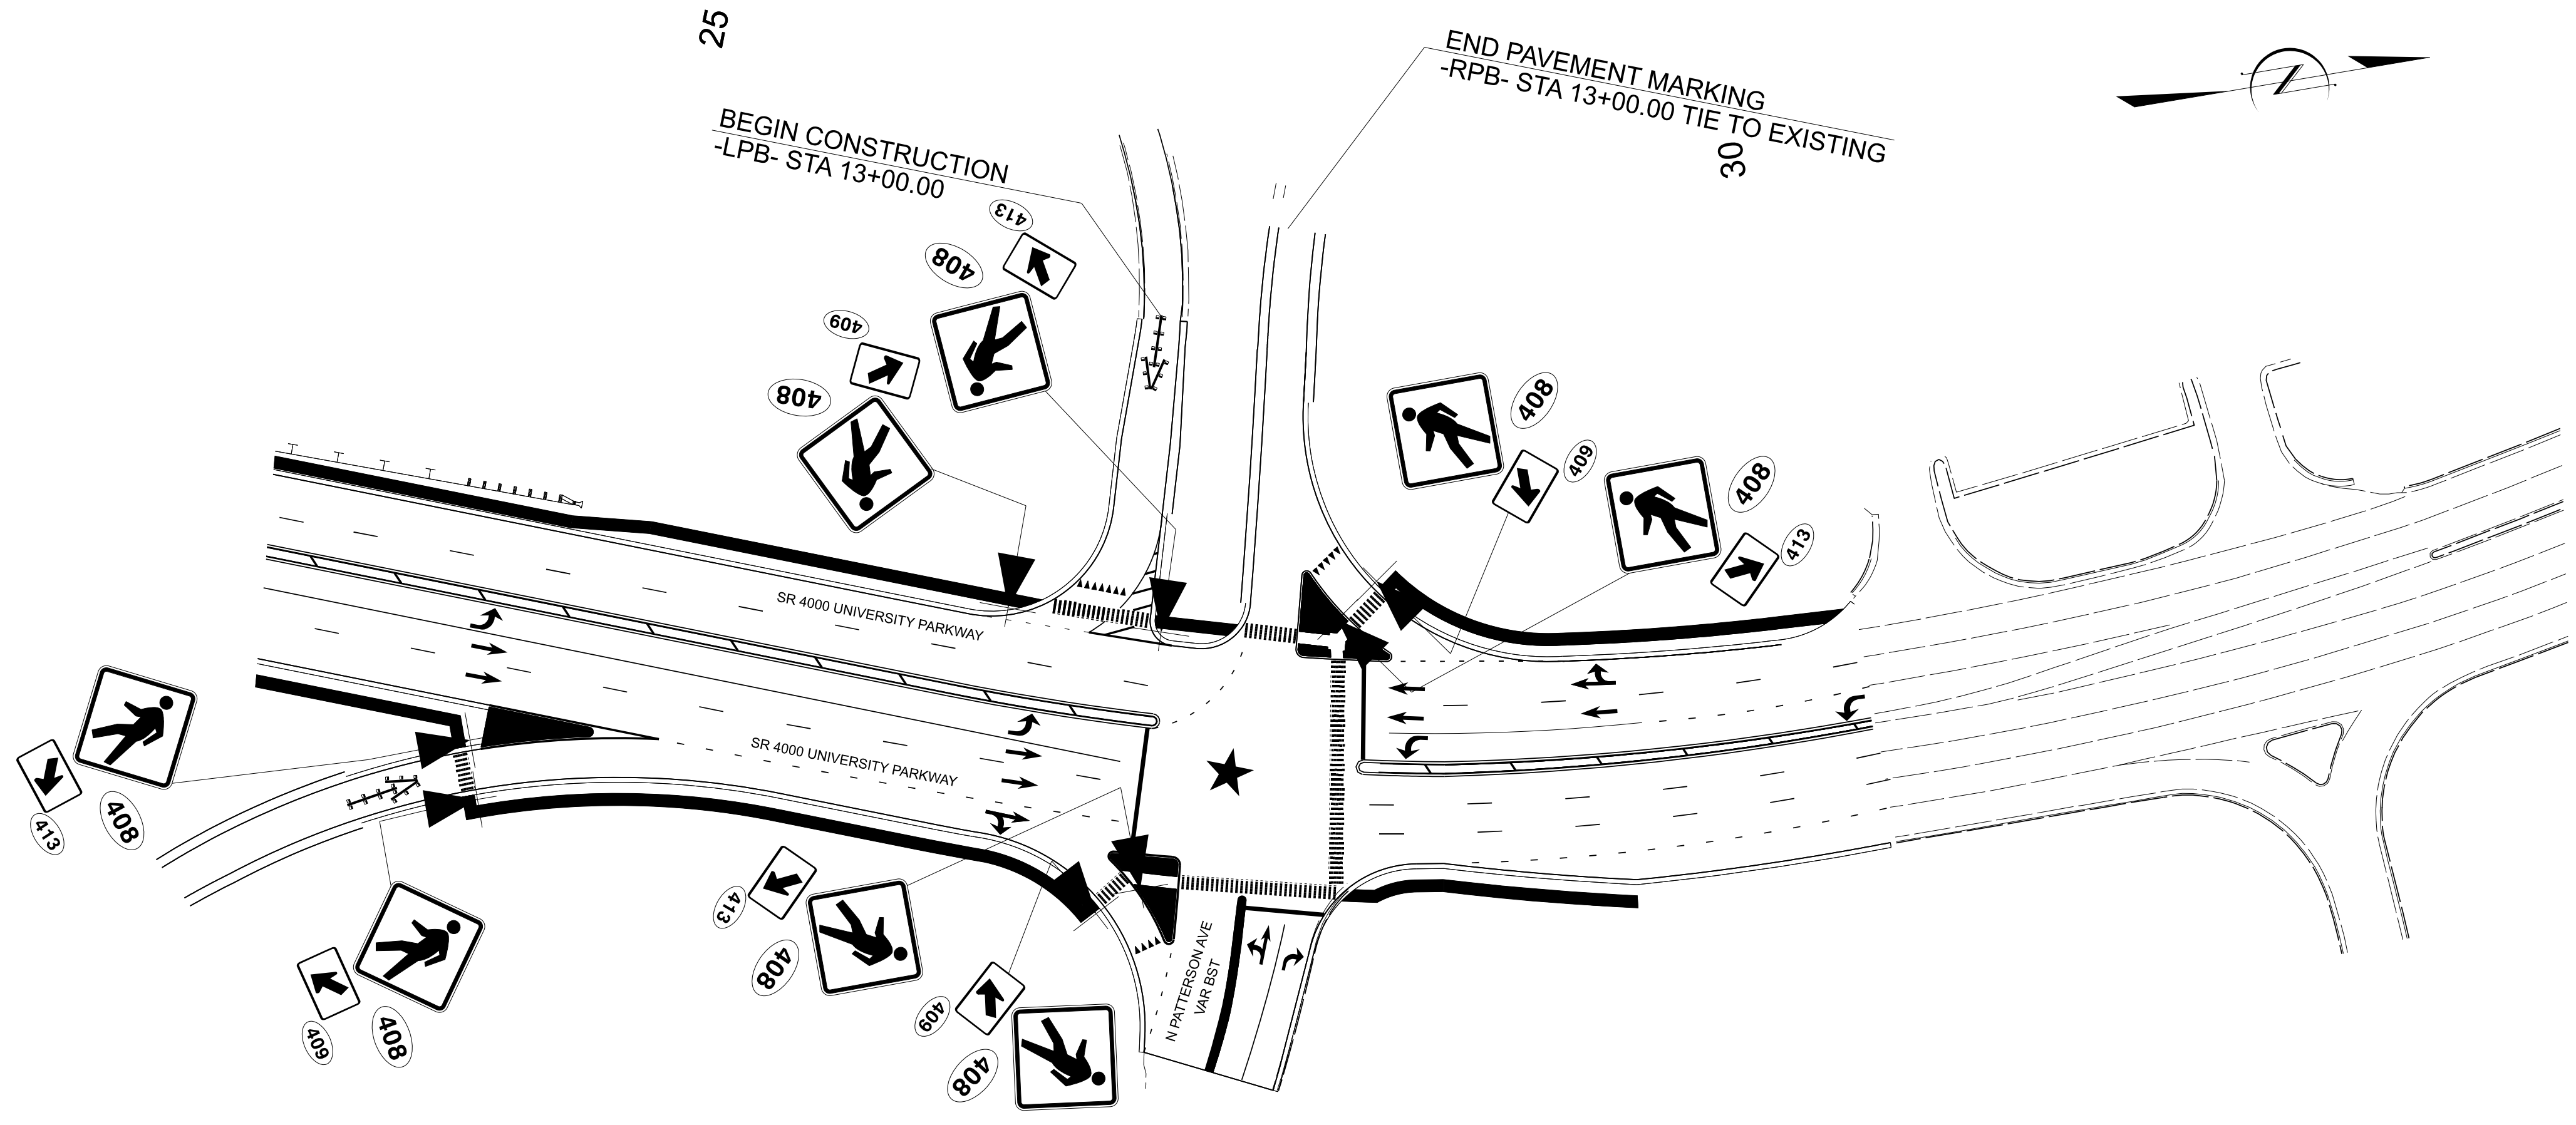

BR-0168  
 PMP 09A  
 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION  
 Approved by: Ashley K. Matthews  
 DATE: 03/04/2026  
 SEAL: NORTH CAROLINA PROFESSIONAL SEAL 048105  
 ENGINEER ASHLEY K. MATTHEWS

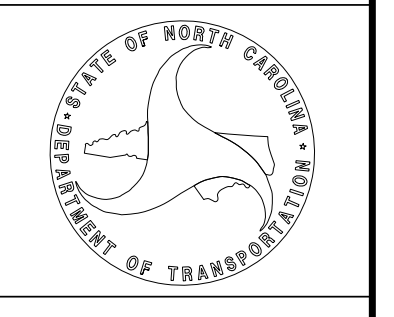

# Ped-Crossing Detail