

PHASING

PHASE I

- STEP 1: USING ROADWAY STANDARD DRAWING (RSD) 1101.01 SHEETS 2 AND 3 OF 3 INSTALL ADVANCE WARNING SIGNS ON NC-24 AND NC-58. PLACE TRAFFIC CONTROL DEVICES AS SHOWN ON TMP-4-8.
- STEP 2: AWAY FROM TRAFFIC AND USING ROADWAY STANDARD DRAWING (RSD) 1101.02 SHEETS 1 AND 3 OF 19 AND RSD 1101.04 SHEET 1 OF 2, AS NEEDED, PERFORM THE FOLLOWING AS SHOWN ON TMP-4 THROUGH TMP-8:
- BEGIN CONSTRUCTION ON PROPOSED RAMP B AND RAMP D, UP TO BUT NOT INCLUDING THE FINAL LAYER OF SURFACE COURSE.
 - BEGIN WIDENING ALONG NC-58, UP TO BUT NOT INCLUDING THE FINAL LAYER OF SURFACE COURSE.
 - CONSTRUCT WSP PIPES AT -Y1- STA. 15+70± AND -Y2- STA. 11+00± USING JACK AND BORE.
 - PLACE PEDESTRIAN DEVICES AND COMPLETE SIDEWALK.
- STEP 3: USING ROADWAY STANDARD DRAWING (RSD) 1101.02 SHEETS 1 AND 3 OF 19, COMPLETE THE FOLLOWING AS SHOWN ON TMP-4 THROUGH TMP-8:
- CONSTRUCTION ON PROPOSED RAMP B AND RAMP D, UP TO BUT NOT INCLUDING THE FINAL LAYER OF SURFACE COURSE.
 - WIDENING ALONG NC-58, UP TO BUT NOT INCLUDING THE FINAL LAYER OF SURFACE COURSE.
 - INSTALL TEMPORARY AND PROPOSED SIGNAL POLES AS SHOWN ON TMP-6 AND TMP-8 AND THE SIGNAL PLANS.
- STEP 4: USING ROADWAY STANDARD DRAWING (RSD) 1101.02 SHEETS 1 AND 3 OF 19, PERFORM THE FOLLOWING:
- PLACE TEMPORARY PAVEMENT MARKINGS AND TEMPORARY PAVEMENT MARKERS ON NC-24 AND NC-58, AS SHOWN ON TMP-9 THROUGH TMP-13 AND IN THE FINAL PATTERN ACCORDING TO THE FINAL PAVEMENT MARKING PLANS.
 - PLACE TRAFFIC CONTROL DEVICES TO PHASE II LOCATIONS, AS SHOWN ON TMP-9 THROUGH TMP-13.
 - ACTIVATE TEMPORARY SIGNAL AT INTERSECTION OF NC-24 AND NC-58, AS SHOWN ON TMP-11.
 - ACTIVATE FINAL SIGNAL AT INTERSECTION OF NC-24 AND OLD NC-58, AS SHOWN ON TMP-13.
 - PLACE TRAFFIC INTO THE PHASE II PATTERN AS SHOWN ON TMP-9 THROUGH TMP-13.


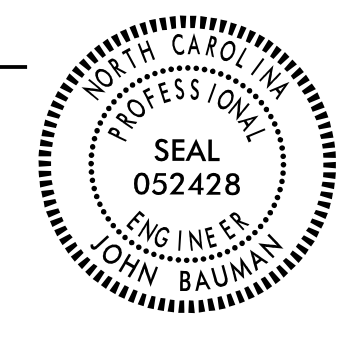

PHASE II

NOTE: ENSURE TEMPORARY MARKINGS ARE APPLIED ON MILLED/WEDGED SURFACES AND ON COMPLETE WIDENING SECTIONS PRIOR TO TRAFFIC SHIFTS.

- STEP 1: USING ROADWAY STANDARD DRAWING (RSD) 1101.02 SHEETS 1, 3, AND 7 OF 19 AND RSD 1101.04 SHEET 1 OF 2, AS SHOWN ON TMP-9 THROUGH TMP-13, PERFORM THE FOLLOWING ON NC-24 AND NC-58:
- COMPLETE RESURFACE OF NC-24 AND NC-58.
 - COMPLETE MINOR DRAINAGE LINES.
 - COMPLETE PROPOSED SIGNAL POLES AND ACTIVATE FINAL SIGNAL.
- STEP 2: USING ROADWAY STANDARD DRAWING (RSD) 1101.02 SHEETS 1 AND 3 OF 19, REMOVE ASPHALT PAVEMENT AT INTERSECTION OF NC-24 AND NC-58, AND PLACE THE FINAL LAYER OF SURFACE COURSE AND INSTALL THE FINAL PAVEMENT MARKINGS ACCORDING TO THE FINAL PAVEMENT MARKING PLANS ON NC-24 AND NC-58.
- STEP 3: REMOVE ALL WORK ZONE TRAFFIC CONTROL DEVICES AND OPEN TRAFFIC TO FINAL PATTERN.

5/5/2026
X:\2017\SET\124-00-R-5858\TP\T-traffic\TMP\R-5858_TMP-3.dgn
jbauman



| | | |
|---|---|---|
| APPROVED:  DATE: 5/5/2026 <div style="text-align: center;">  </div> |  | <h1 style="font-size: 2em; margin: 0;">PHASING</h1> |
| DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED | | |