

Docusign Envelope ID: 533E2B89-B382-8066-82B8-357C80406C20

PROJECT REFERENCE NO.	SHEET NO.
2027CPT.13.04.20111	22

* – *WHERE CLEAR SPACE IS CONSTRAINED ON TWO OR MORE SIDES, THE CLEAR SPACE SHALL BE 4'MINIMUM X 5'MINIMUM, WITH 5' PROVIDED IN THE DIRECTION OF THE PEDESTRIAN STREET CROSSING.*

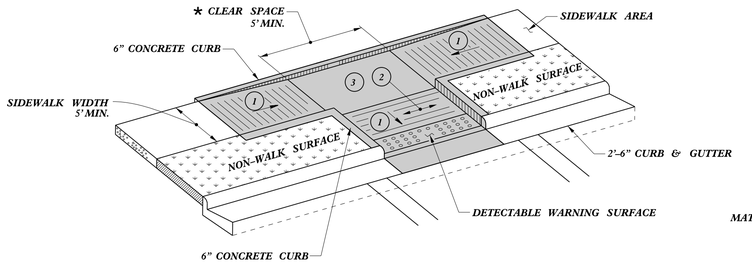


TYPE 3

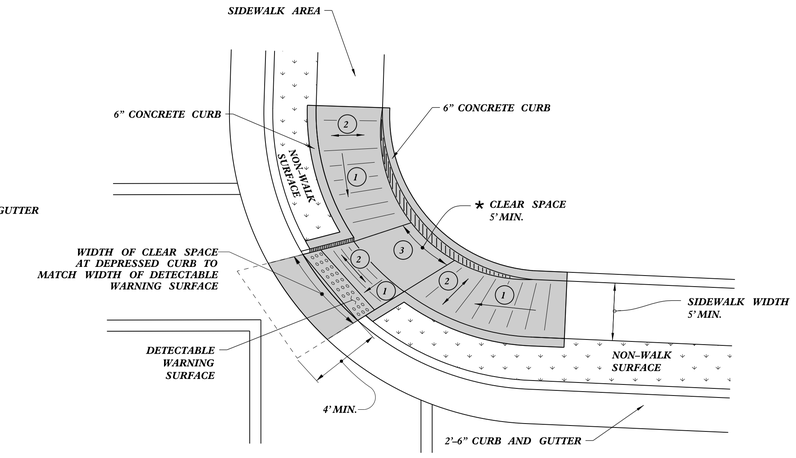

TYPE 3 MODIFIED
INSTALLATION IN A RADIUS

NOTES:
DETECTABLE WARNING SURFACE SHALL COVER 2'-0" LENGTH AND FULL WIDTH OF THE RAMP FLOOR AS SHOWN ON THE DETAILS.

DETECTABLE WARNING SURFACE SHALL CONTRAST VISIBLY WITH ADJOINING SURFACE, EITHER LIGHT-ON-DARK, OR DARK-ON-LIGHT SEQUENCE COVERING THE ENTIRE RAMP.

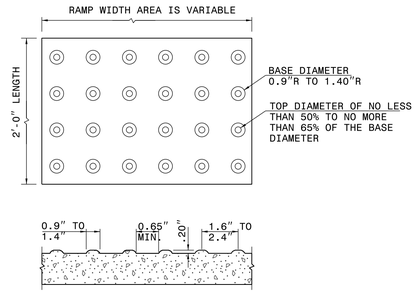

DETECTABLE WARNING SURFACE

(1) *8.33% (12:1) MAX RAMP SLOPE*

(2) *CROSS SLOPE: 2.00%*

(3) *MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00%.*

PAY LIMITS FOR 1 CURB RAMP

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR
CURB RAMP
PARALLEL RAMP

SHEET 9 OF13

848D06

NORTH CAROLINA PROFESSIONAL SEAL 033144 ENGINEER NICOLE M HACKLER

Signed by:
Nicole M. Hackler
5884323D34164C5...

10/22/2026

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACTS STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

SEE TITLE BLOCK

ORIGINAL BY: S.CALHOUN DATE: 12-22-2023
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC.: special details\nmhackler\D0609.dgn