


P A V E M E N T S C H E D U L E


C1	PROP. APPROX. 40 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER	J1	PROP. 150 mm AGGREGATE BASE COURSE.
C2	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.	J2	PROP. 200 mm AGGREGATE BASE COURSE.
C3	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 50 mm IN DEPTH.	K	SUBGRADE TO BE TREATED WITH LIME TO A DEPTH OF 200 mm, AT A RATE OF 11 kg PER SQ. METER AS DIRECTED BY THE ENGINEER. OR SUBGRADE TO BE TREATED WITH CEMENT TO A DEPTH OF 180mm, AT A RATE OF 30 kg PER SQ. METER AS DIRECTED BY THE ENGINEER. OR SUBGRADE TO BE TREATED WITH AGGREGATE AT A RATE OF 135 kg PER SQ. METER AND CEMENT AT A RATE OF 30 kg PER SQ. METER TO A DEPTH OF 180 mm AS DIRECTED BY THE ENGINEER.
C4	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.		
C5	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 50 mm IN DEPTH.		
D1	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.	P1	PRIME COAT AT THE RATE OF 1.58 L PER SQ. METER.
D2	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 65 mm OR GREATER THAN 110 mm IN DEPTH.	R1	750 mm CONCRETE CURB AND GUTTER.
D3	PROP. APPROX. 80 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 196 kg PER SQ. METER.	R2	SHOULDER BERM GUTTER.
D4	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 65 mm OR GREATER THAN 110 mm IN DEPTH.	T	EARTH MATERIAL.
E1	PROP. APPROX. 100 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 245 kg PER SQ. METER.	U	EXISTING PAVEMENT.
E2	PROP. APPROX. 120 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE 294 kg PER SQ. METER.	W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE STANDARD WEDGING DETAIL THIS SHEET)
E3	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.	NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.	
E4	PROP. APPROX. 90 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE 220.5 kg PER SQ. METER.		
E5	PROP. APPROX. 180 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 220.5 kg PER SQ. METER IN EACH OF TWO LAYERS.		
E6	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.		



PROJECT REFERENCE NO. R-2568B	SHEET NO. 2
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER

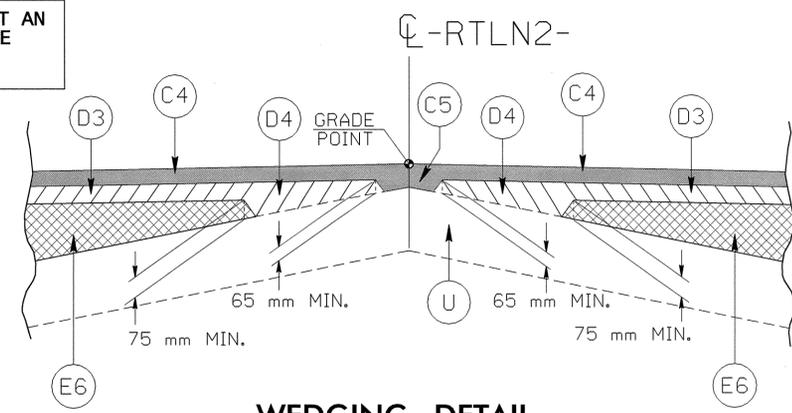

WEDGING DETAIL

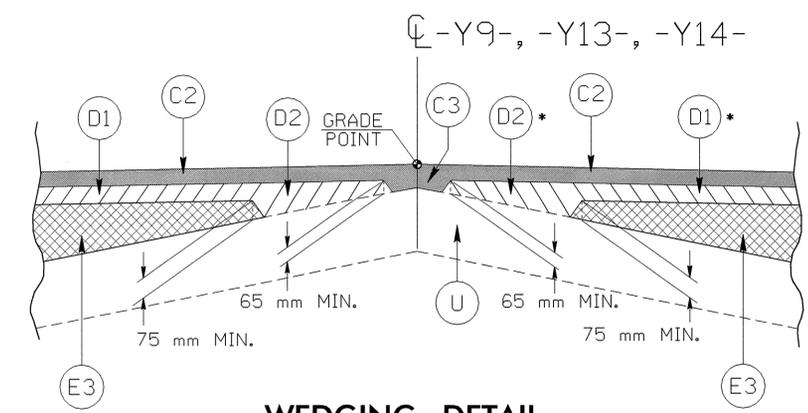

WEDGING DETAIL

* NOTE: D1 AND D2 NOT REQUIRED FOR -Y14-