

PROJECT NOTES

| | |
|---------------------|-----------|
| PROJ. REFERENCE NO. | SHEET NO. |
| B-4134 | TCP-2 |

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

ADAPT THE TRAFFIC CONTROL PLANS, WHEN DIRECTED BY THE ENGINEER, TO MEET FIELD CONDITIONS TO PROVIDE SAFE AND EFFICIENT TRAFFIC MOVEMENT. CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS AND ROADWAY DETAILS ARE NOT ATTAINABLE, OR RESULT IN DUPLICATE, OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING OR REMOVAL OF DEVICES.

SIGNING

- A) PROVIDE PERMANENT SIGNING.
- B) PROVIDE DETOUR SIGNING WITHIN AND OFF THE PROJECT LIMITS.
- C) COVER OR REMOVE ALL DETOUR SIGNS WITHIN AND OFF THE PROJECT LIMITS WHEN A DETOUR IS NOT IN OPERATION.
- D) ENSURE ALL NECESSARY SIGNING IS IN PLACE PRIOR TO ALTERING ANY TRAFFIC PATTERN.

TRAFFIC CONTROL DEVICES

- E) PLACE TYPE III BARRICADES, WITH "ROAD CLOSED" SIGN R11-2 ATTACHED, OF SUFFICIENT LENGTH TO CLOSE ENTIRE ROADWAY. STAGGER OR OVERLAP BARRICADES TO ALLOW FOR INGRESS OR EGRESS.

PAVEMENT MARKINGS AND MARKERS

- F) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

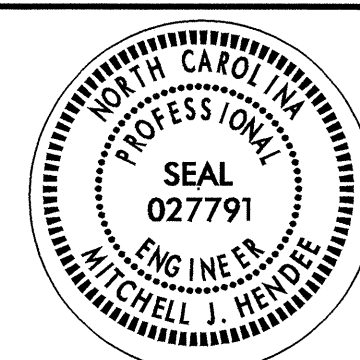
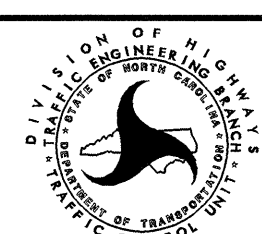
| <u>ROAD NAME</u> | <u>MARKING</u> | <u>MARKER</u> |
|-------------------------|----------------|---------------|
| 1. SAND PIT RD(SR 1105) | PAIN | RAISED |

- G) PLACE AT LEAST TWO APPLICATIONS OF PAINT PAVEMENT MARKINGS ON THE FINAL WEARING SURFACE ON NEW ASPHALT PAVEMENT. PLACE ADDITIONAL APPLICATIONS OF PAINT UPON SUFFICIENT DRYING TIME, AS DETERMINED BY THE ENGINEER
- H) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

PHASING

- STEP 1: INSTALL ALL DETOUR SIGN ASSEMBLIES AS SHOWN ON TCP-3.
- STEP 2: USING ROADWAY STANDARD DRAWING NO. 1101.03 SHEET 1 OF 9 AND TCP-3 PLACE TYPE III BARRICADE AND CLOSE SAND PIT RD(SR 1105) AND PLACE TRAFFIC ON THE PROPOSED DETOUR.
- STEP 3: AWAY FROM TRAFFIC, REMOVE EXISTING STRUCTURE AND PAVEMENT ON SAND PIT RD(SR 1105). SEE ROADWAY PLANS FOR LOCATIONS.
- STEP 4: AWAY FROM TRAFFIC, CONSTRUCT PROPOSED STRUCTURE, ROADWAY, DRAINAGE AND GUARD RAIL ON SAND PIT RD(SR 1105) UP TO AND INCLUDING FINAL SURFACE COURSE (SEE ROADWAY PLANS).
- STEP 5: PLACE FINAL PAVEMENT MARKINGS (PAINT) AND PERMANENT MARKERS (RAISED).
- STEP 6: REMOVE DETOUR SIGNING AND ALL TRAFFIC CONTROL DEVICES AND OPEN SAND PIT RD(SR 1105) TO 2-LANE, 2-WAY TRAFFIC.

20-JUL-2004 09:31
F:\TCP\Springett\TCP.dgn
dspringett AT TET08715

| | | | |
|---|----------------|---|-----------|
| APPROVED: <i>[Signature]</i> | DATE: 7/20/04 | PROJECT NOTES/PHASING | |
|  | SCALE: NONE |  | REVISIONS |
| | DATE: 2004 | | |
| | DWG. BY: DMS | | |
| | DESIGN BY: DMS | | |
| REVIEWED BY: | | CADD FILE | |