


NOTE: UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN WHERE APPLICABLE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.



CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

| BASELINE DISTANCES | | |
|--------------------|-----------------|----------|
| | BEARING | DISTANCE |
| BL-1 TO BL-2 | N 75°53'05.8" E | 235.61' |
| BL-2 TO BL-3 | S 64°19'22.9" E | 217.73' |
| BL-3 TO BL-4 | N 88°35'16.1" E | 199.64' |
| BL-4 TO BL-5 | N 71°50'23.4" E | 220.56' |


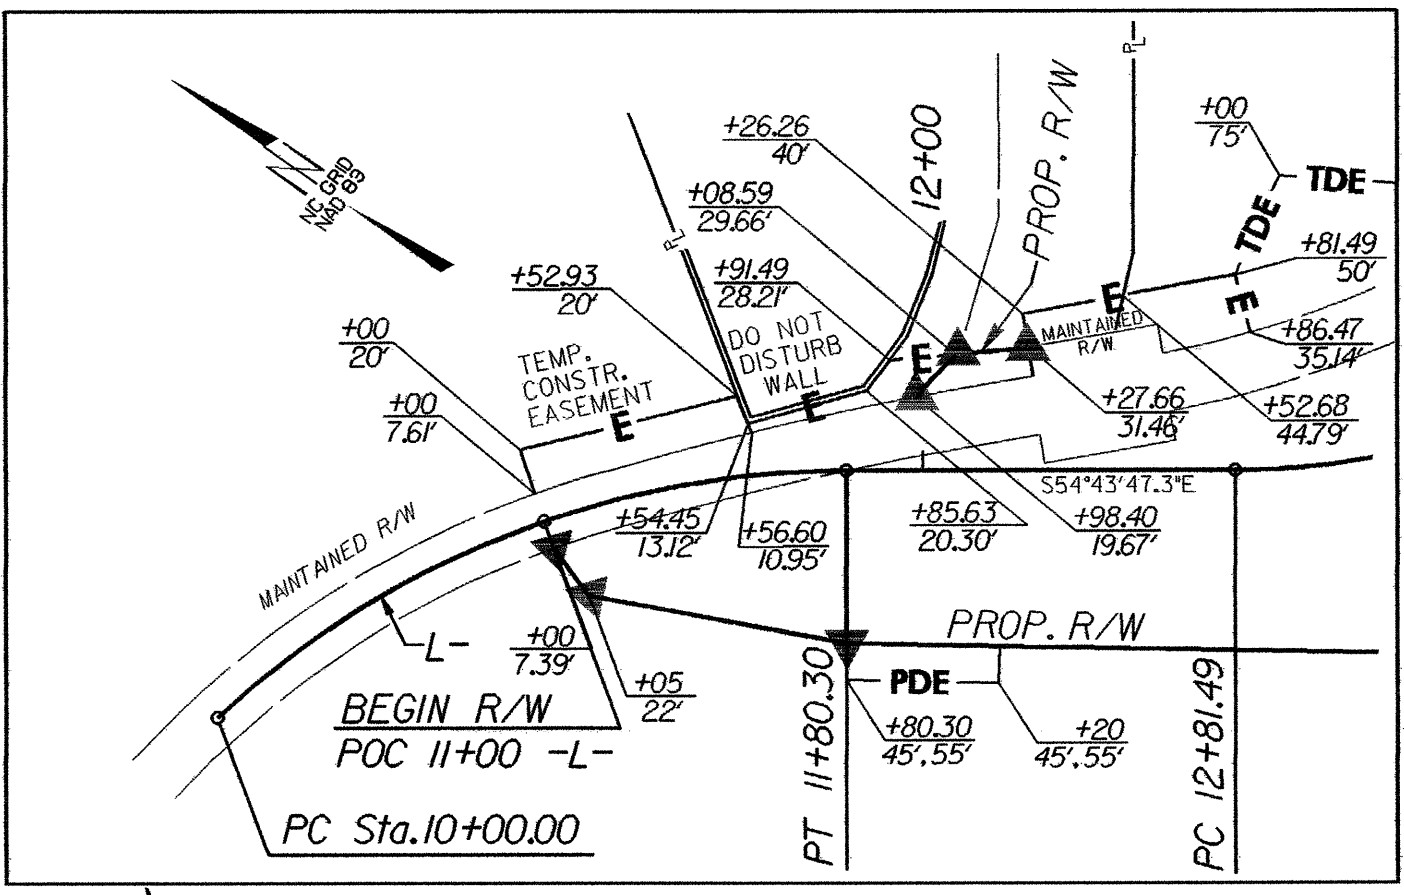


PI Sta 14+09.78
 $\Delta = 65' 21" 22.8" (LT)$
 $D = 28' 38" 52.4"$
 $L = 228.14'$
 $T = 128.29'$
 $R = 200.00'$
 $e = .02$
 $Ds = 25 MPH$


PI Sta 17+32.08
 $\Delta = 30' 12" 13.7" (RT)$
 $D = 21' 36" 05.9"$
 $L = 139.82'$
 $T = 71.58'$
 $R = 265.24'$
 $e = exist.$

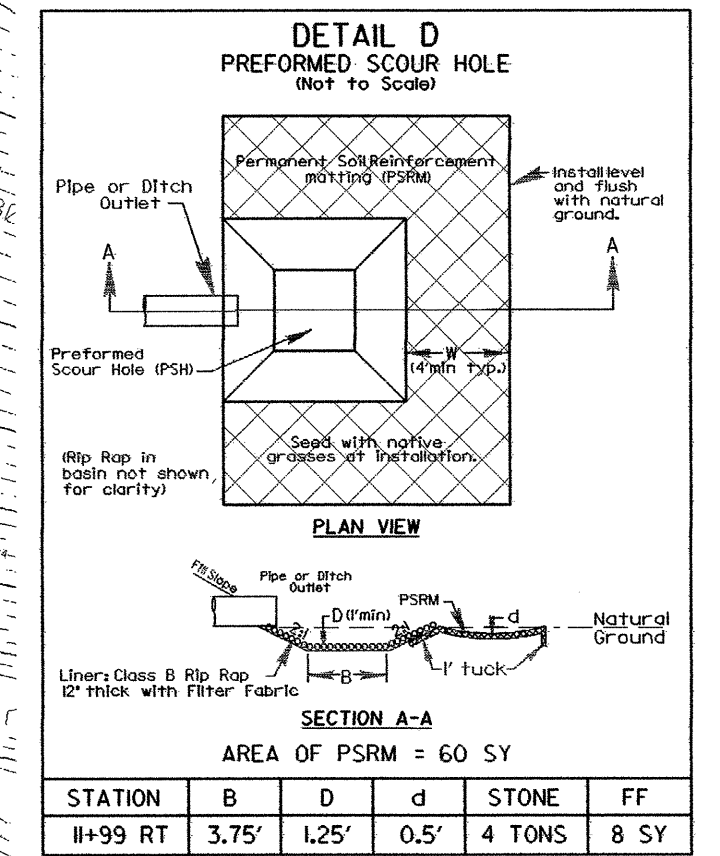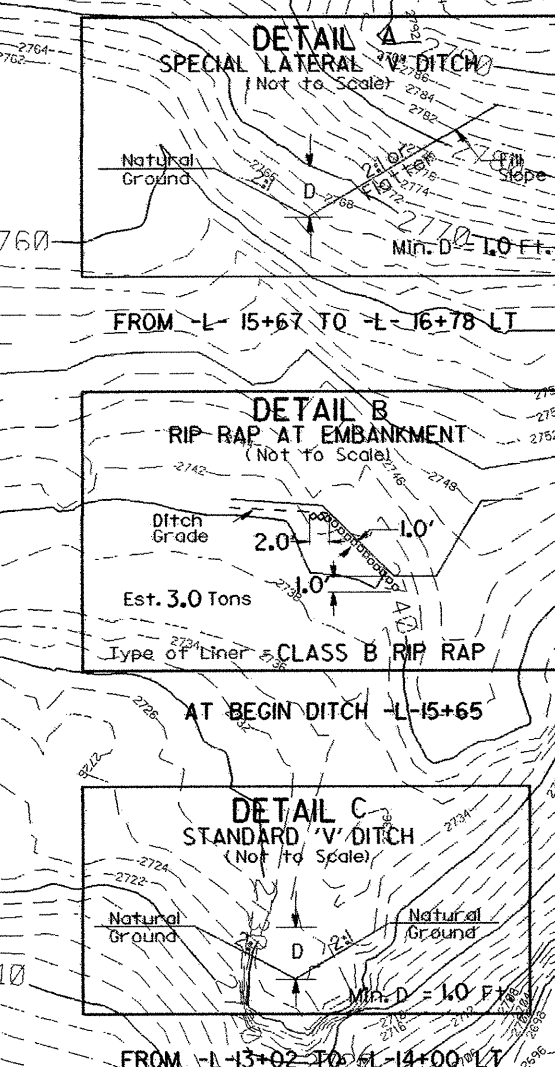

PI Sta 10+94.58
 $\Delta = 42' 46" 07.7" (RT)$
 $D = 23' 43" 17.3"$
 $L = 180.30'$
 $T = 94.58'$
 $R = 241.54'$
 $e = exist.$

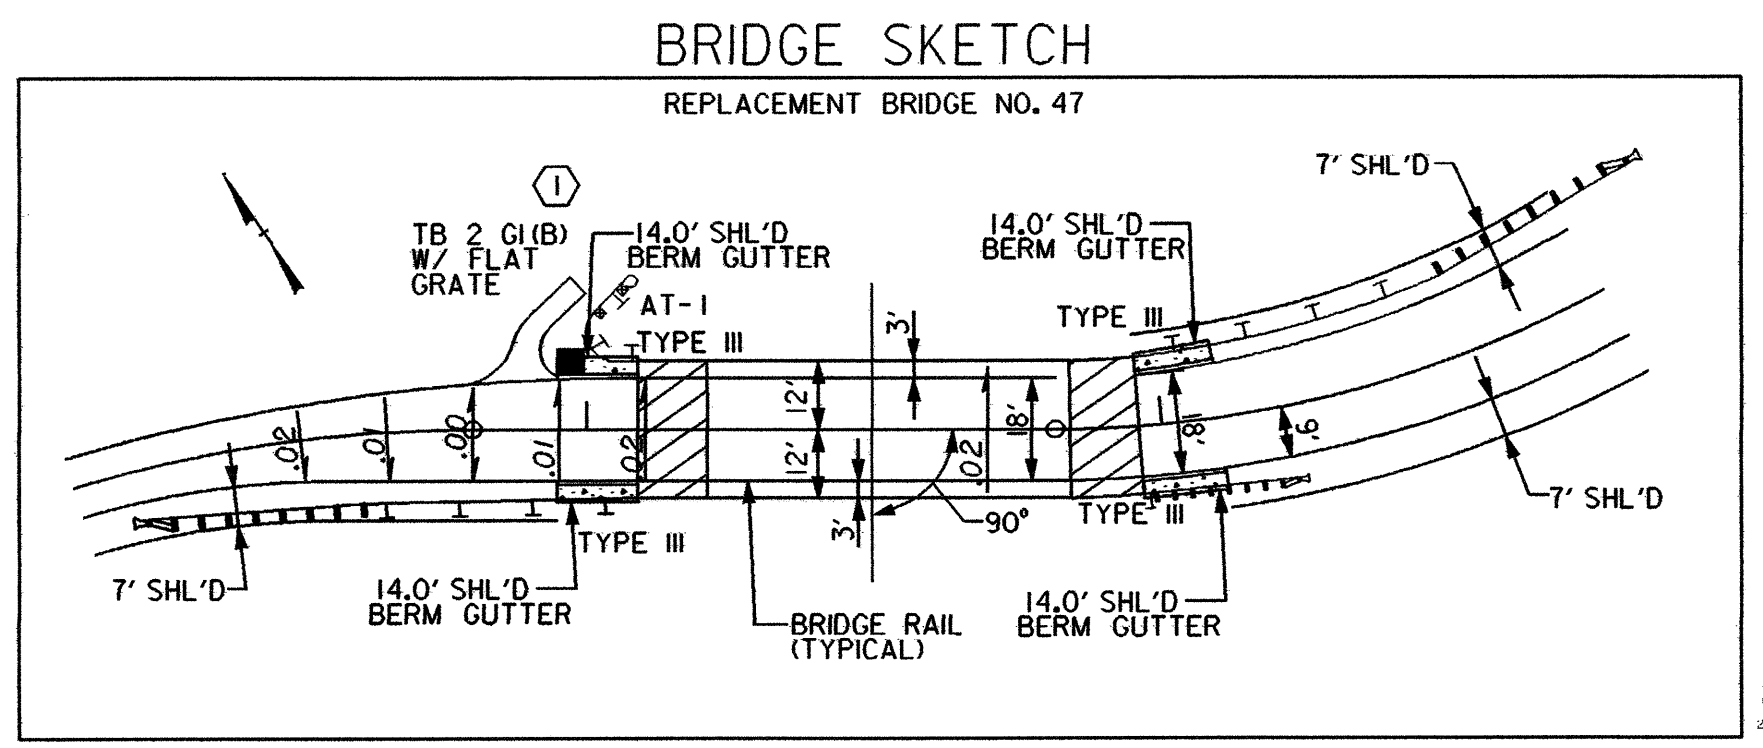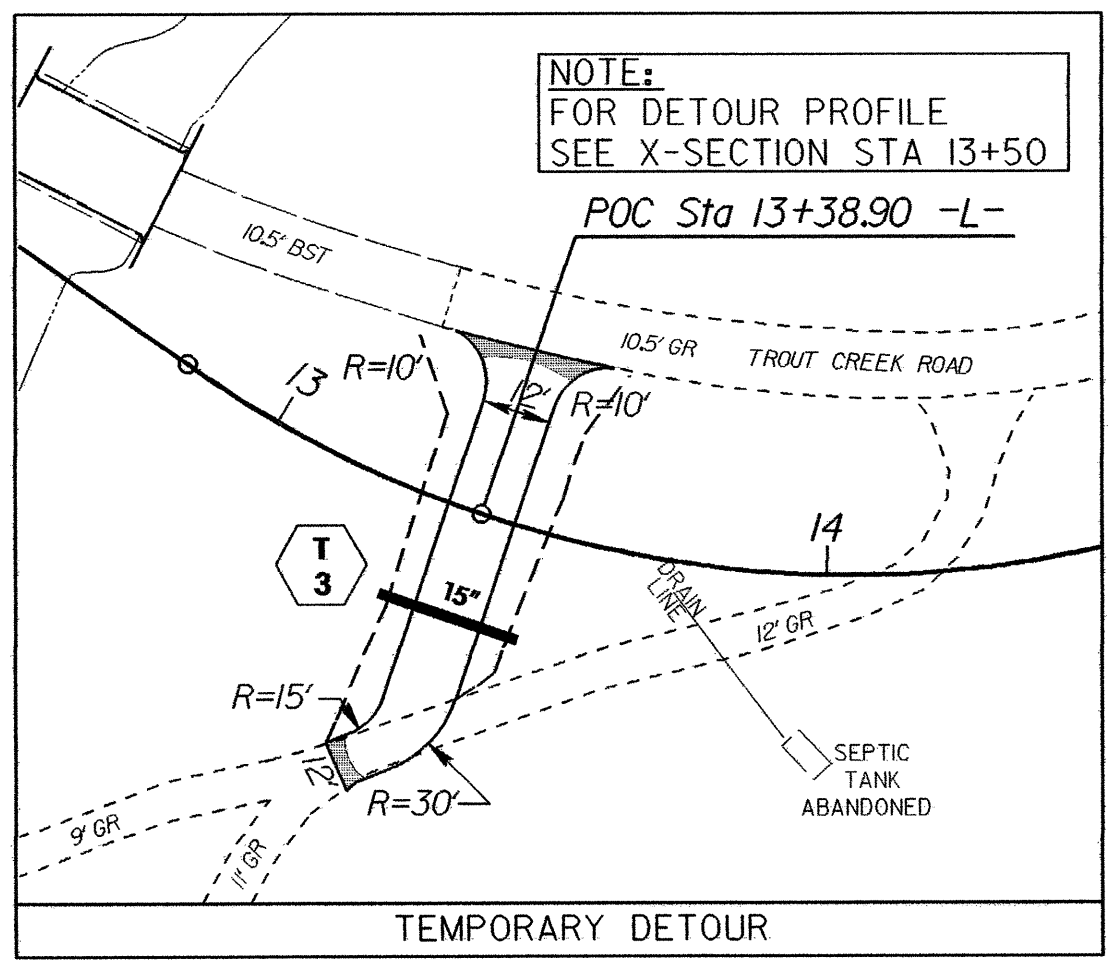

FOR STRUCTURE PLANS, SEE S-1 THRU S-

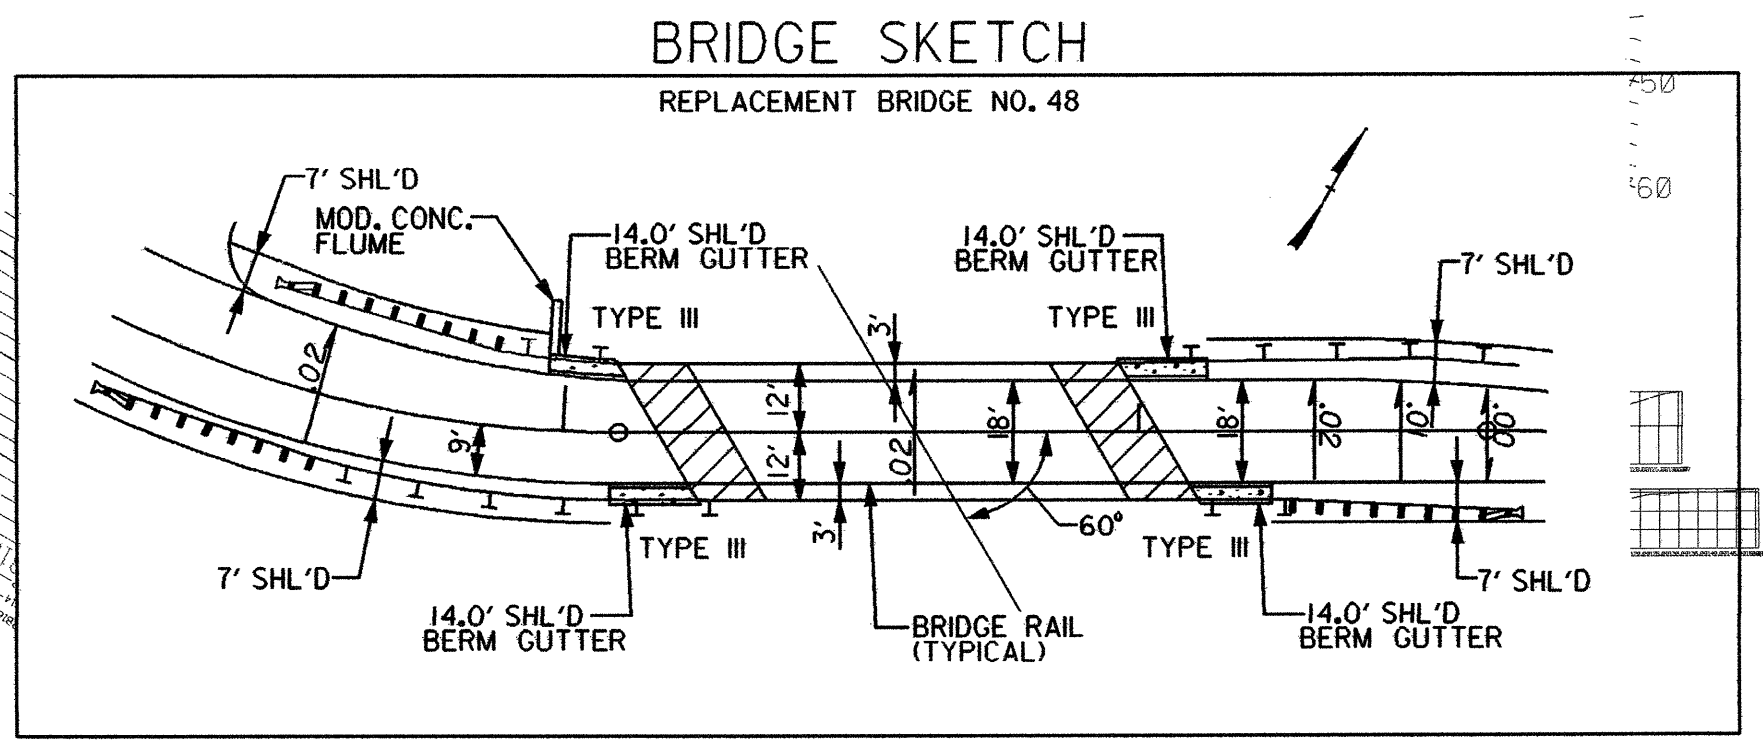

FOR STRUCTURE PLANS, SEE S-1 THRU S-

ENVIRONMENTALLY SENSITIVE AREA
 SEE PROJECT SPECIAL PROVISIONS