

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION

TIP NO. B-4992	SHEET NO. PMP-1
APPROVED: <i>[Signature]</i>	
DATE: 1/7/10	
SEAL	

**PAVEMENT MARKING PLAN**  
**WILSON COUNTY**

LOCATION: BRIDGE NO.1 ON SR 1628 (WOODBIDGE ROAD)  
OVER THE OVERFLOW CHANNEL OF CONTENTNEA

T.I.P.: B-4992

CONTRACT: C202237

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION

**GENERAL NOTES**

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
SR 1628 (WOODBIDGE RD.)	PAINT	NONE
BRIDGE	PAINT	NONE

- B) PLACE TWO APPLICATIONS OF PAINT PAVEMENT MARKINGS ON THE FINAL WEARING SURFACE. PLACE THE SECOND APPLICATION OF PAINT UPON SUFFICIENT DRYING TIME OF THE FIRST.
- C) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
- D) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
- E) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.
- F) REMOVE ALL RESIDUE AND SURFACE LAITANCE BY ACCEPTABLE METHODS ON THE BRIDGE DECK(S) PRIOR TO PLACING PAINT PAVEMENT MARKING.

**INDEX**

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN TITLE SHEET
PMP-2	PAVEMENT MARKING SCHEDULE & DETAIL

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

Ayman I. Alqudwah, P.E. SIGNING & DELINEATION REGIONAL ENGINEER

D. M. Eaton SIGNING & DELINEATION PROJECT DESIGN ENGINEER/TECHNICIAN



TIP NO.	SHEET NO.
B-4992	PMP-2
APPROVED: <i>[Signature]</i>	
DATE: 1/7/10	
SEAL	



## B-4992 FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	FINAL PAVEMENT MARKINGS		PAY ITEM QUANTITY	TOTAL
PA	WHITE EDGELINE (2X)	PAINT (4")		1856 LF	
PI	YELLOW DOUBLE CENTER (2X)	PAINT (4")		1856 LF	
TOTAL					3712 LF

NOTE: FOR EACH PAINT PAVEMENT MARKING ITEM, 1X IMPLIES A SINGLE APPLICATION, 2X IMPLIES TWO APPLICATIONS, AND 3X IMPLIES THREE APPLICATIONS.

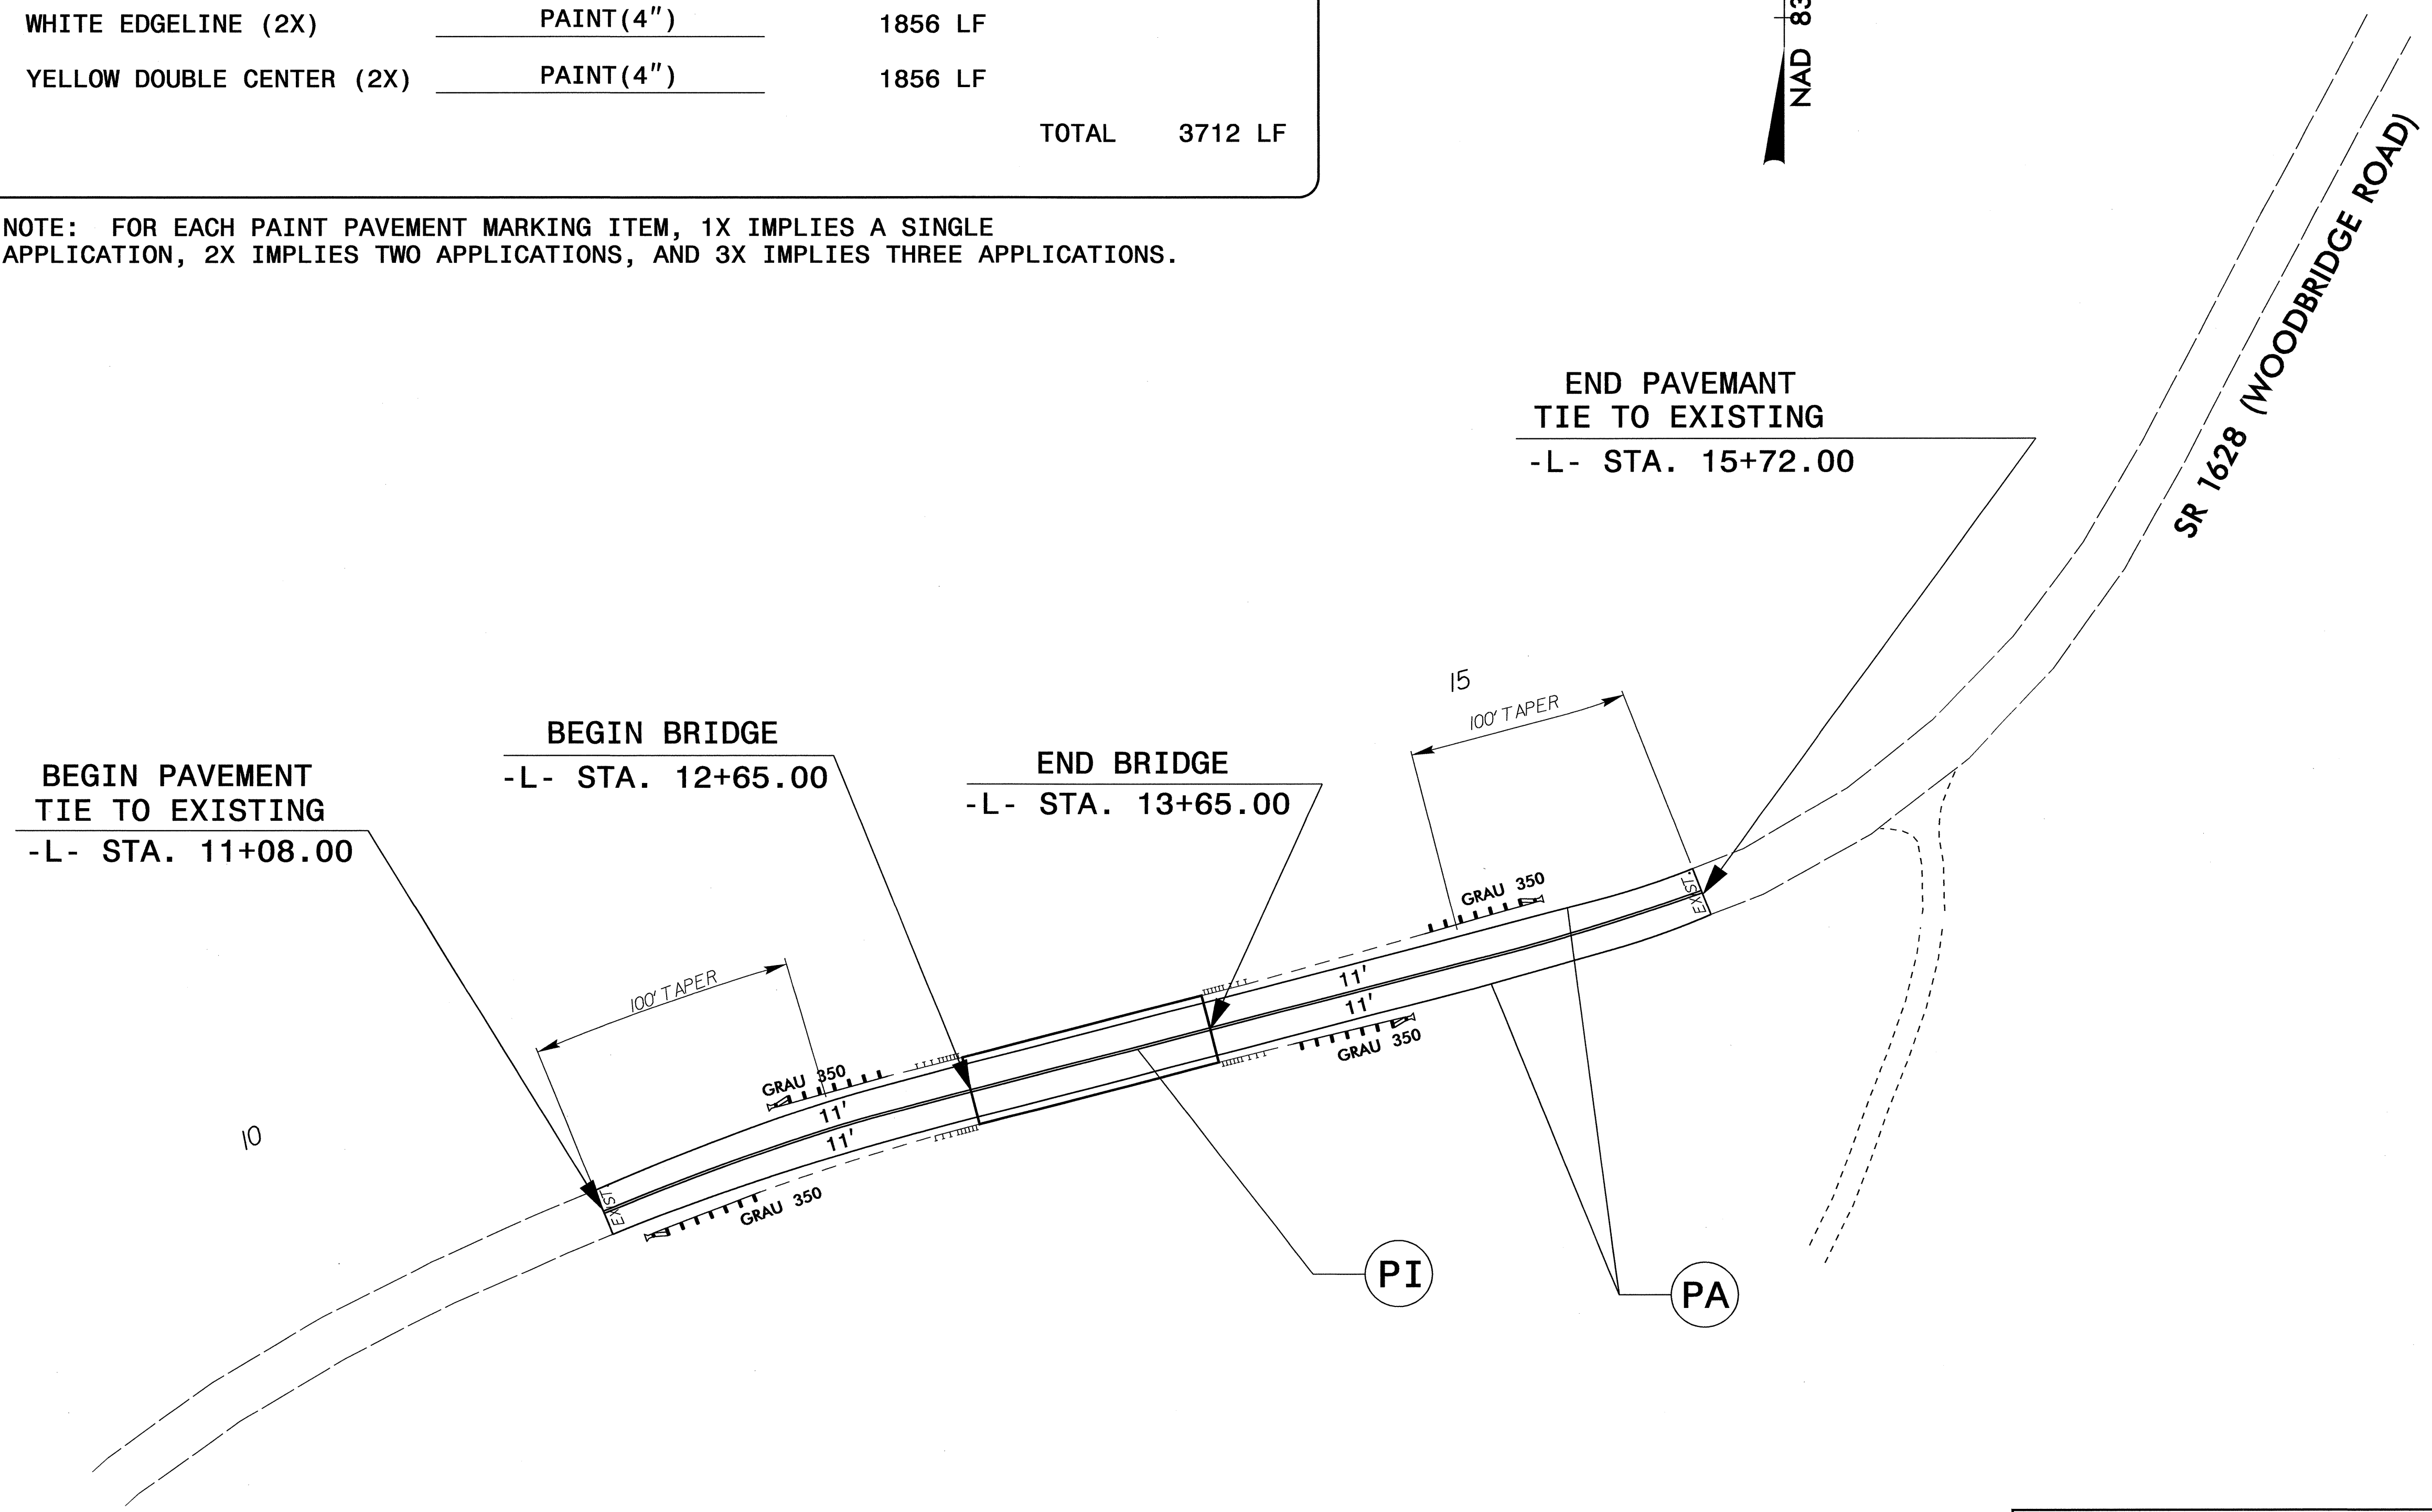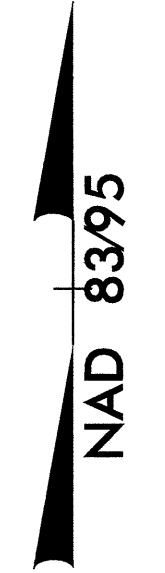

**PAVEMENT MARKING SCHEDULE & DETAIL**

04-JAN-2010 09:50 P:\TIP\Projects\B\B4992\Traffic\Signing\CADD\Signing Layout Plans\B-4992\_sgm.dgn meaton