

**SOIL TEST RESULTS**

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO GLASS	L.L.	P.L.I.	% BY WEIGHT				% PASSING SIEVES			% MOISTURE	% ORGANIC
							C. SAND	F. SAND	SILT	CLAY	10	40	200		
SS-76	0.0	543+00.0-L-	0.0-1.5	A-2-4(0)	31	NP	53	24	12	11	97	63	26	10	
S-151	20.0 LT.	545+00.0-L-	2.0-7.0	A-6(4)	33	17	31	25	11	33	99	82	48	15	
S-126	0.0	549+00.0-L-	0.0-3.0	A-2-4(0)	26	6	72	15	3	10	89	45	15	15	
S-128	0.0	549+00.0-L-	8.0-13.0	A-4(1)	35	9	43	21	18	18	97	66	41	14	
SS-98	0.0	551+00.0-L-	8.5-10.0	A-2-7(0)	43	16	74	11	6	9	85	29	17	22	


BM #24  
RR-SPIKE IN BASE OF POWER POLE  
EL. = 436.300  
-Y3- STA. 37+41.89 OFF. 55.04 RT.

PROJECT REFERENCE NO. <b>R-247BB</b>	SHEET NO. <b>14</b>
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
<b>PRELIMINARY PLANS</b> DO NOT USE FOR CONSTRUCTION	

BM #22  
RR-SPIKE IN BASE OF 12" PINE TREE  
EL. = 431.900  
-Y2- STA. 10+59.88 OFF. 38.11 RT.

BM #23  
RR-SPIKE IN BASE OF 12" PINE TREE  
EL. = 430.880  
-L- STA. 556+86.68 OFF. 237.47 LT.

**PROFILE AT C-L-**

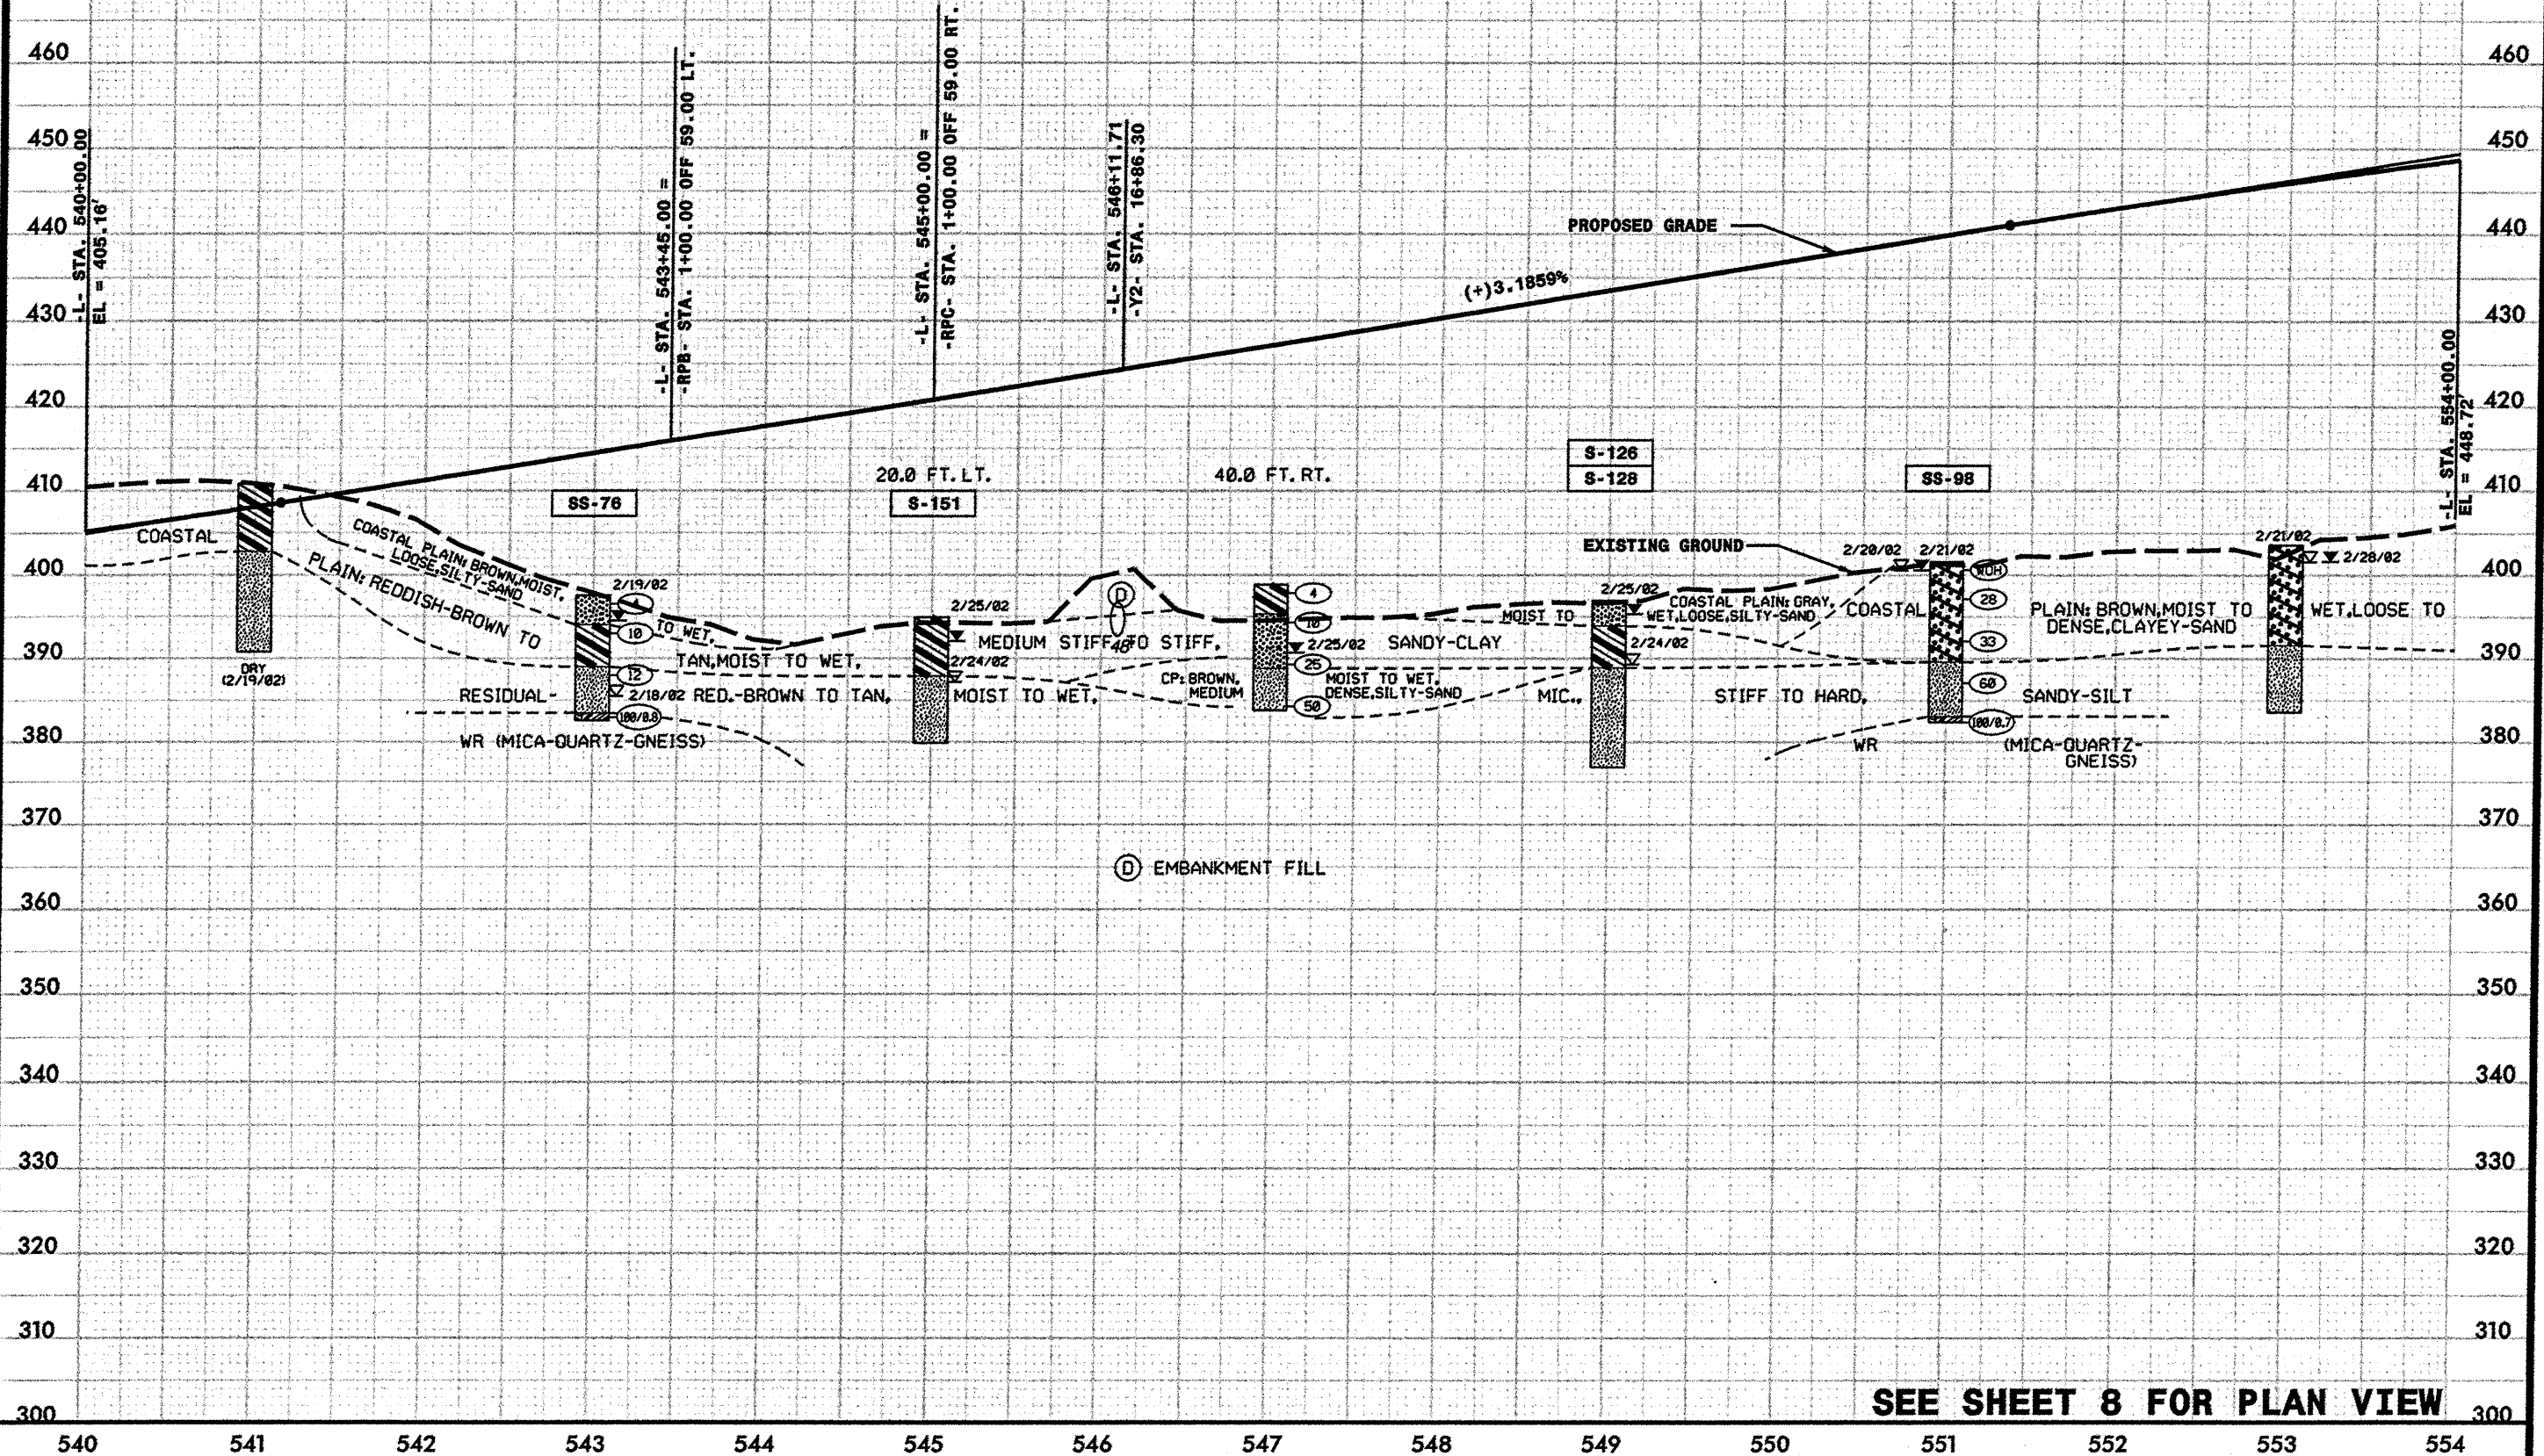

**SEE SHEET 8 FOR PLAN VIEW**