


PROJECT REFERENCE NO.	SHEET NO.
B-3879	EC-5/CONST.6
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

DETAIL OF TEMPORARY DETOUR

DESIGN SPEED = 40mph

-DET-



PI Sta 11+04.41 Δ = 25° 18' 39.3" (RT) D = 12° 19' 18.0" L = 205.42' T = 104.41' R = 465.00' SE = 0.07 RO = SEE PLANS V _{Des} = 40mph	PI Sta 13+59.35 Δ = 36° 37' 56.7" (LT) D = 12° 19' 18.0" L = 297.30' T = 153.93' R = 465.00' SE = 0.08 RO = SEE PLANS V _{Des} = 40mph	PI Sta 19+25.47 Δ = 17° 25' 40.2" (LT) D = 12° 19' 18.0" L = 141.44' T = 71.27' R = 465.00' SE = 0.02 RO = SEE PLANS V _{Des} = 40mph	PI Sta 20+72.27 Δ = 18° 42' 53.9" (RT) D = 12° 19' 18.0" L = 151.89' T = 76.63' R = 465.00' SE = 0.02 RO = SEE PLANS V _{Des} = 40mph
------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------

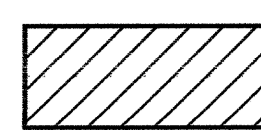 ENVIRONMENTALLY SENSITIVE AREA
SEE PROJECT SPECIAL PROVISIONS

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 6

NOTE: CONSTRUCT -L- PAVEMENT FROM
STA. 10+00.00 TO 17+67.51 PRIOR TO
CONSTRUCTION OF DETOUR

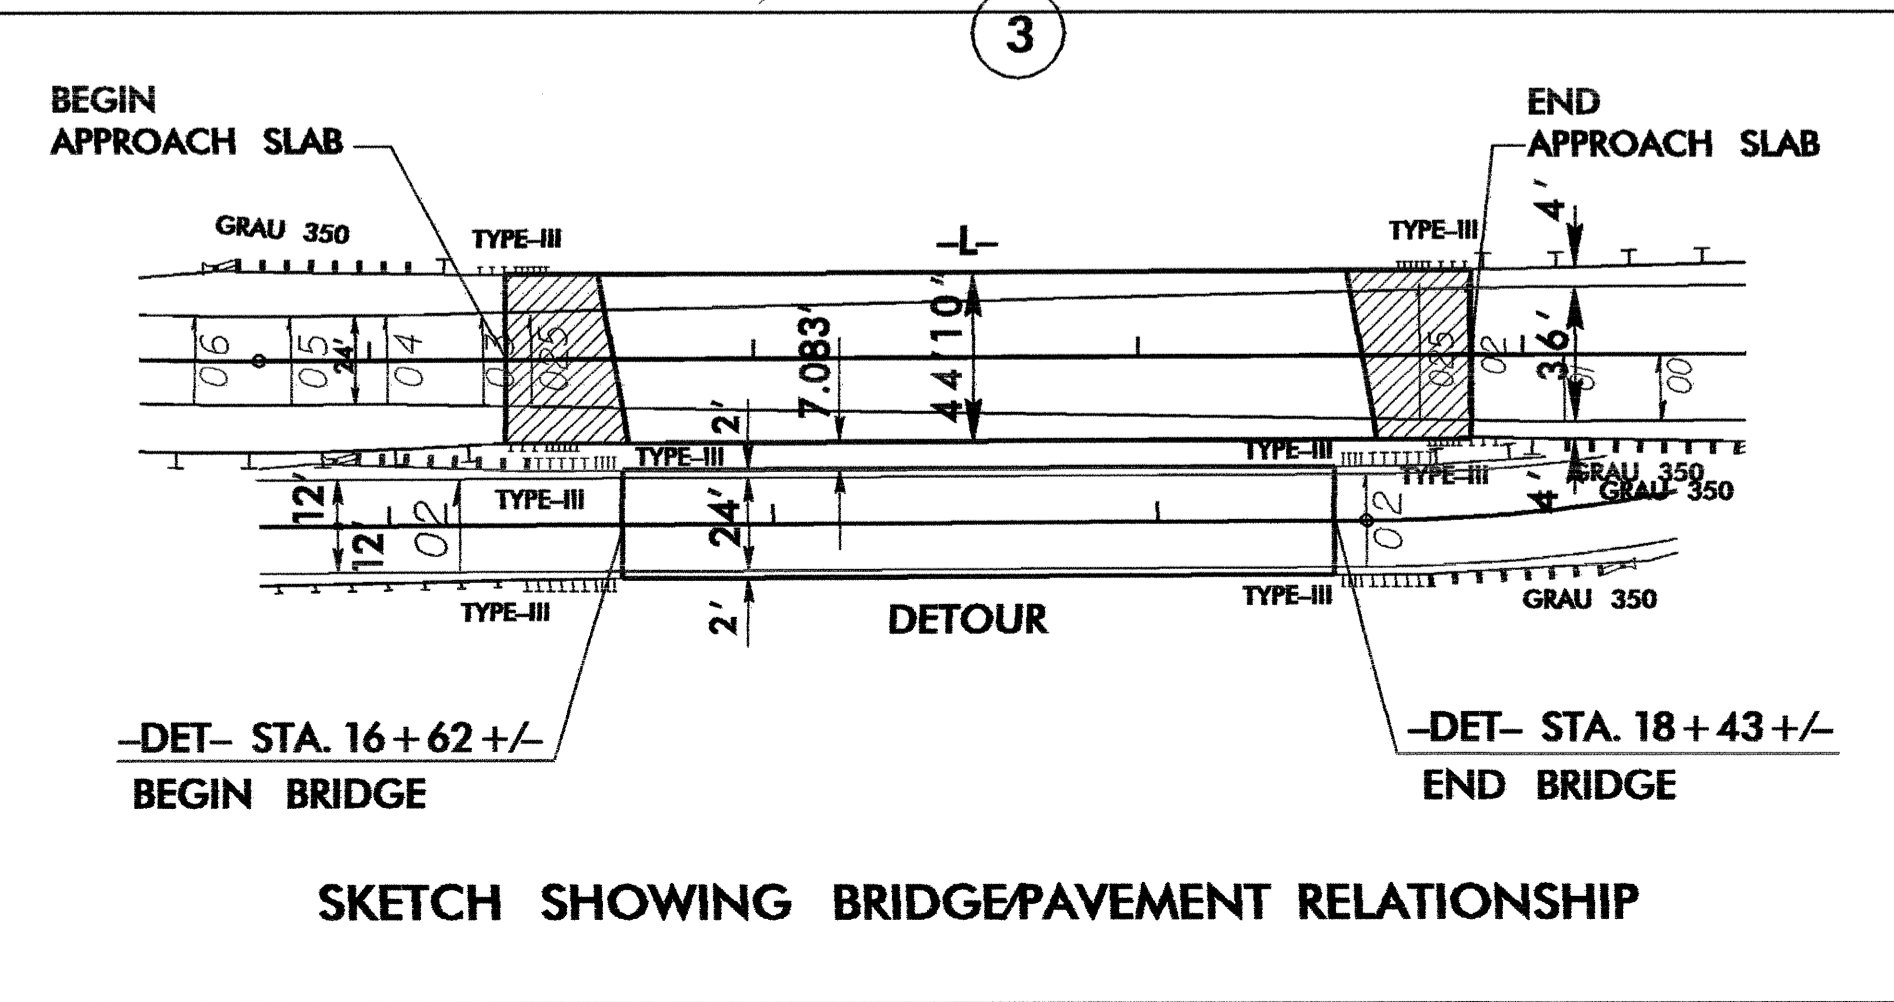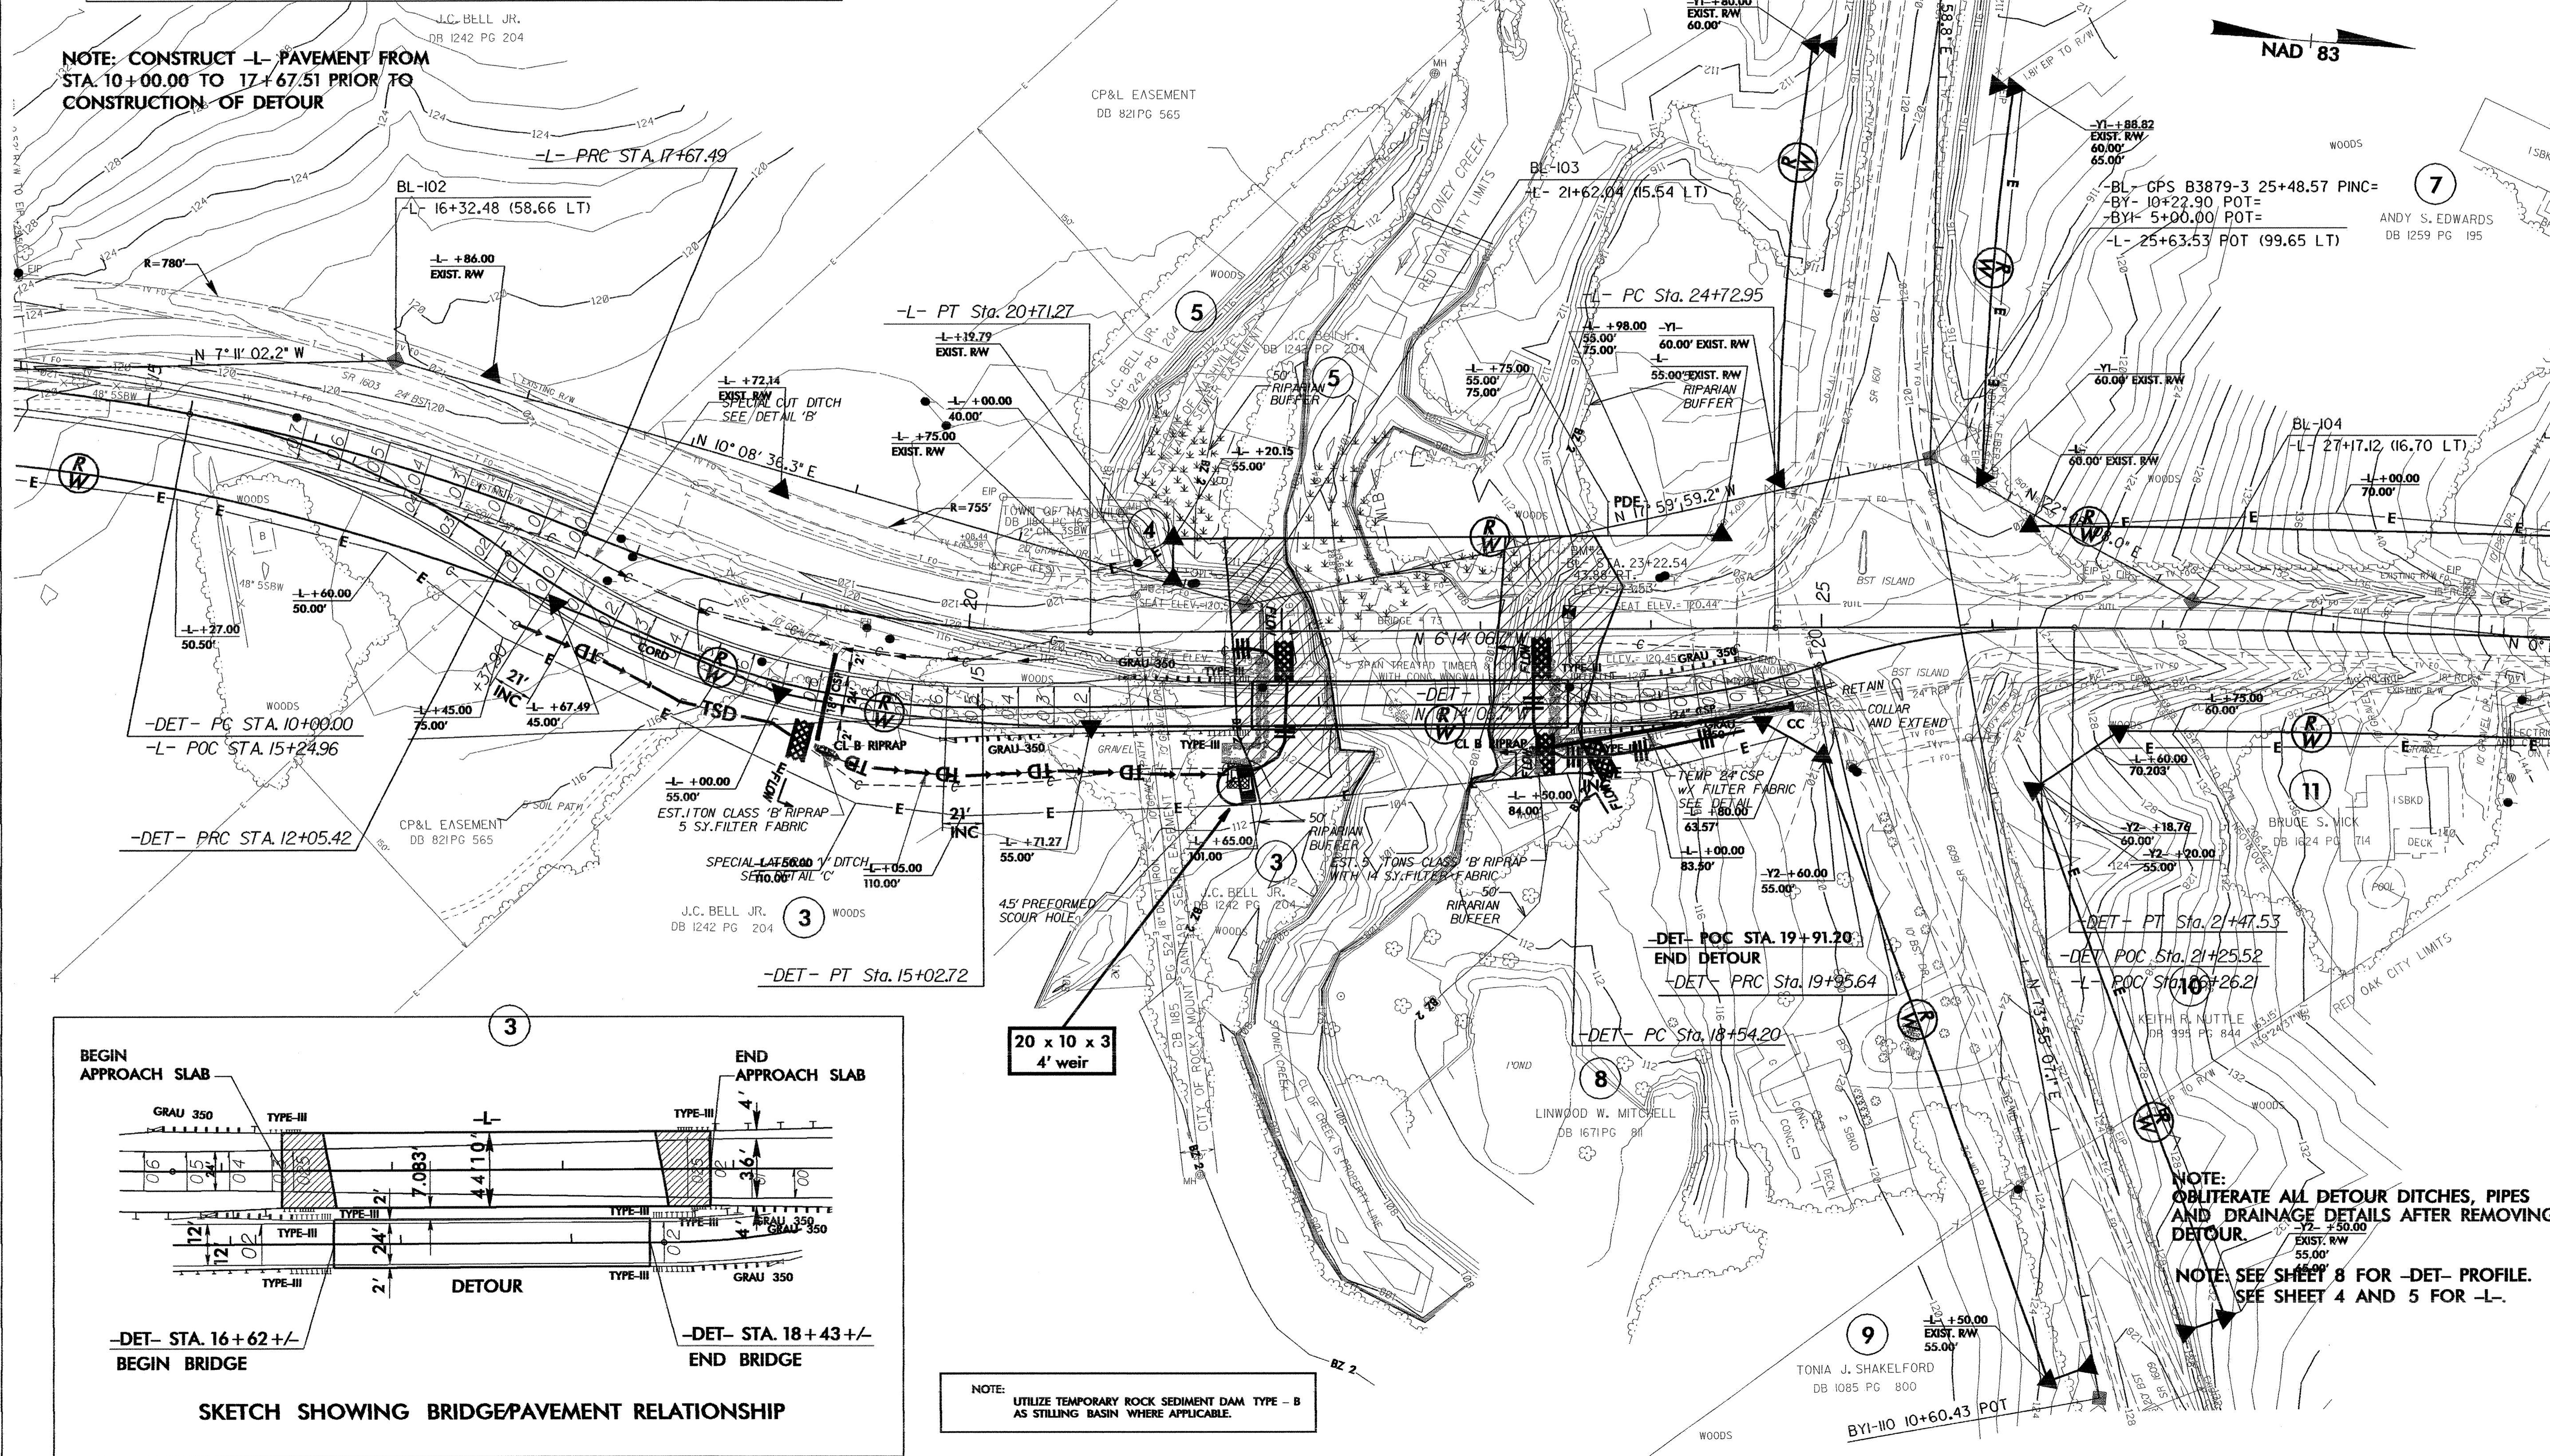

**20 x 10 x 3
4' weir**

NOTE:
UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B
AS STILLING BASIN WHERE APPLICABLE.

NOTE:
OBLITERATE ALL DETOUR DITCHES, PIPES
AND DRAINAGE DETAILS AFTER REMOVING
DETOUR.

NOTE: SEE SHEET 8 FOR -DET- PROFILE.
SEE SHEET 4 AND 5 FOR -L-.