

6/16/99




PROJECT REFERENCE NO. R-0513A	SHEET NO. 2
ROADWAY DESIGN ENGINEER [Signature]	PAVEMENT DESIGN ENGINEER [Signature]
PROFESSIONAL SEAL 25873 9-27-04	PROFESSIONAL SEAL 1668 9/27/04


FINAL PAVEMENT SCHEDULE

C1	PROP. APPROX. 50 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 120 kg PER SQ. METER	D6	PROP. VAR. DEPTH ASPHALT CONC. INTERMED. COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55 mm OR GREATER THAN 110 mm IN DEPTH
C2	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.	E1	PROP. APPROX. 75 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 183.75 kg PER SQ. METER
C3	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 40 mm IN DEPTH.	E3	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
C4	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.	J1	PROP. 150 mm AGGREGATE BASE COURSE.
C5	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 40 mm IN DEPTH.	J2	PROP. 200 mm AGGREGATE BASE COURSE.
C6	PROP. APPROX. 100 mm ASPHALT CONC. SURFACE COURSE, TYPE S12.5C, AT AN AVERAGE RATE OF 120 kg PER SQ. METER IN EACH OF TWO LAYERS.	J3	PROP. 250 mm AGGREGATE BASE COURSE.
C7	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S12.5C, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 35 mm NOR GREATER THAN 60 mm IN DEPTH	J4	PROP. VAR. DEPTH AGGREGATE BASE COURSE.
D1	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.	P	PRIME COAT
D2	PROP. VAR. DEPTH ASPHALT CONC. INTERMED. COURSE, TYPE I19.0 B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55 mm OR GREATER THAN 110 mm IN DEPTH	R1	750 mm CONCRETE CURB AND GUTTER
D3	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.	T	EARTH
D4	PROP. APPROX. 90 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 220.50 kg PER SQ. METER.	W	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL)
D5	PROP. APPROX. 100 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 245 kg PER SQ. METER.	U	EXISTING PAVEMENT


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

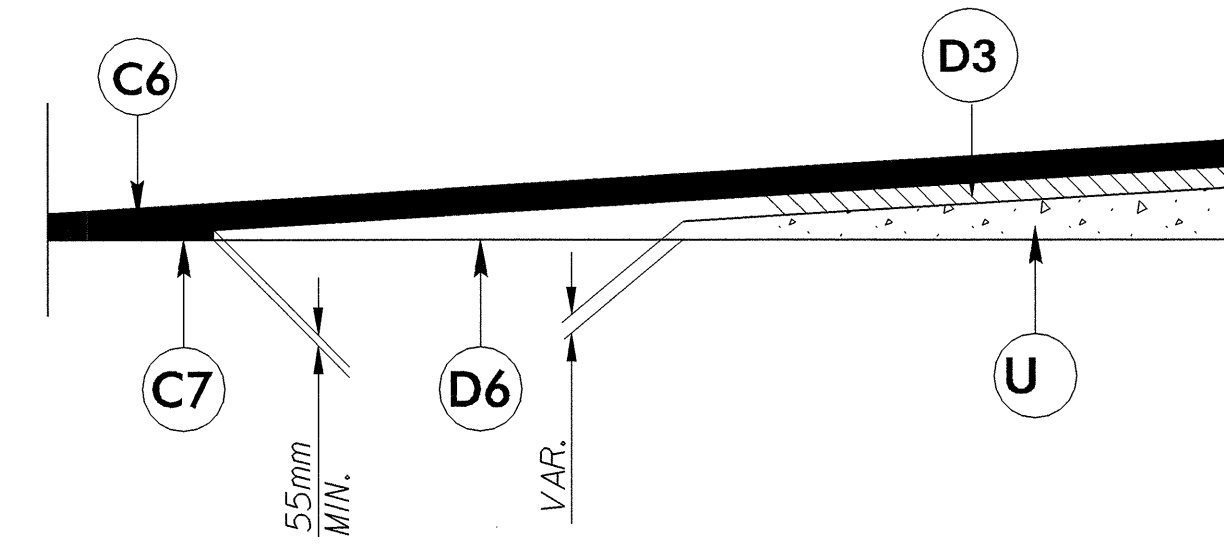


WEDGING DETAIL FOR MAINLINE

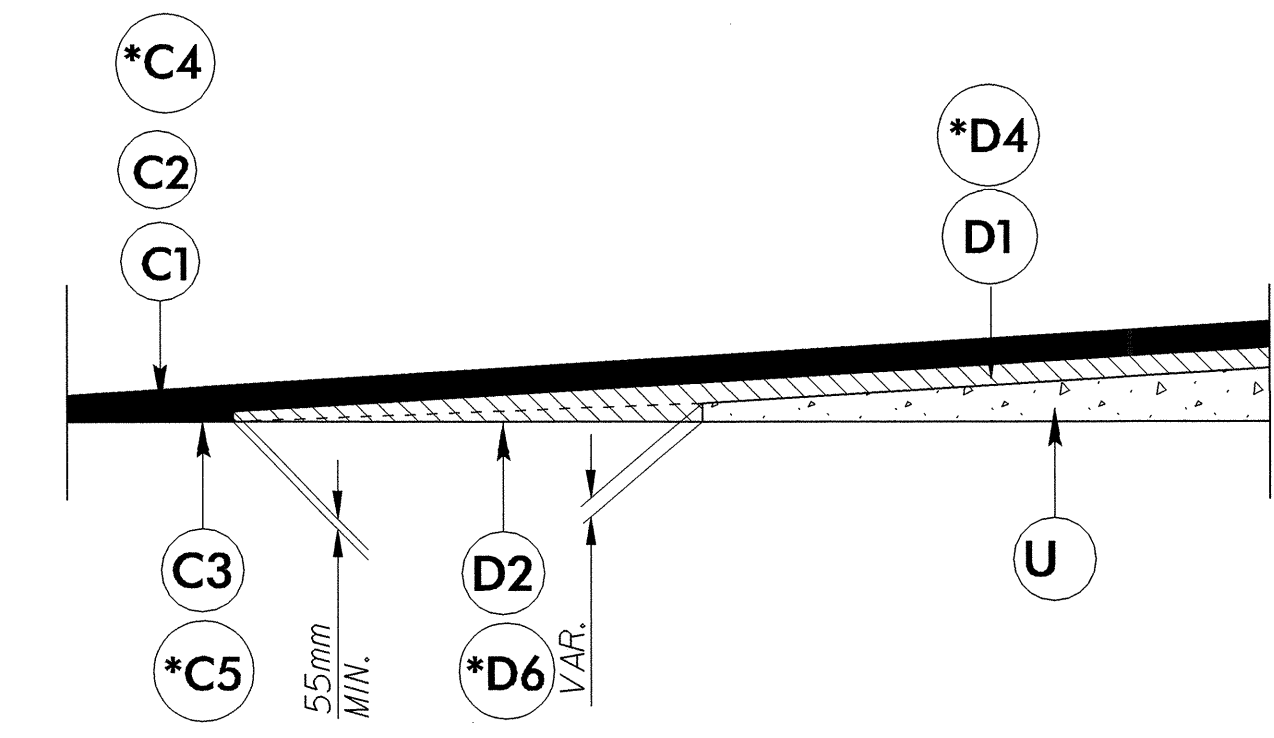

WEDGING DETAIL FOR SERVICE ROADS AND Y-LINES

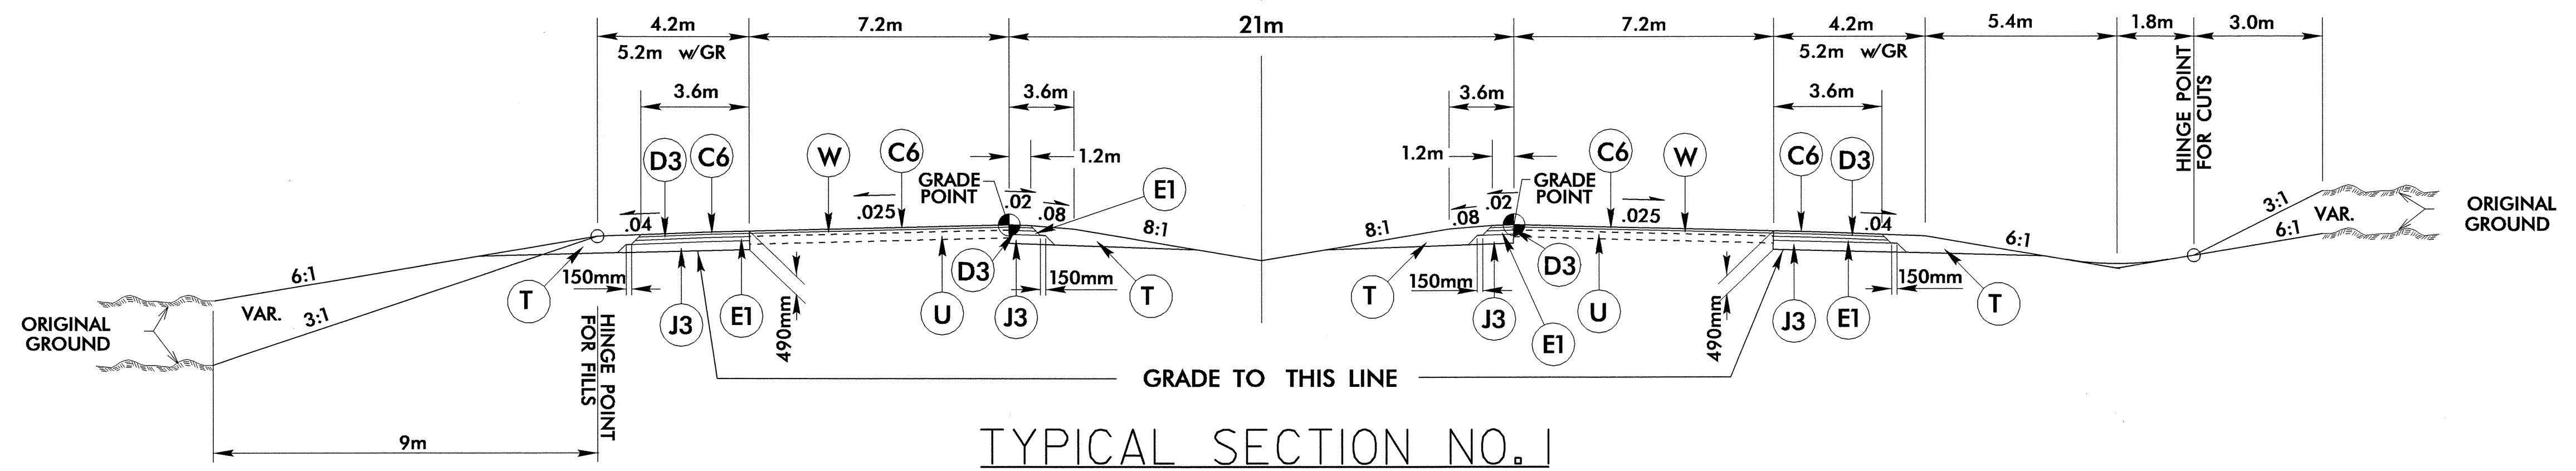

TYPICAL SECTION NO. I
-L- Sta. 10+00 - Sta. 10+60 Resurfacing, Widening & Wedging

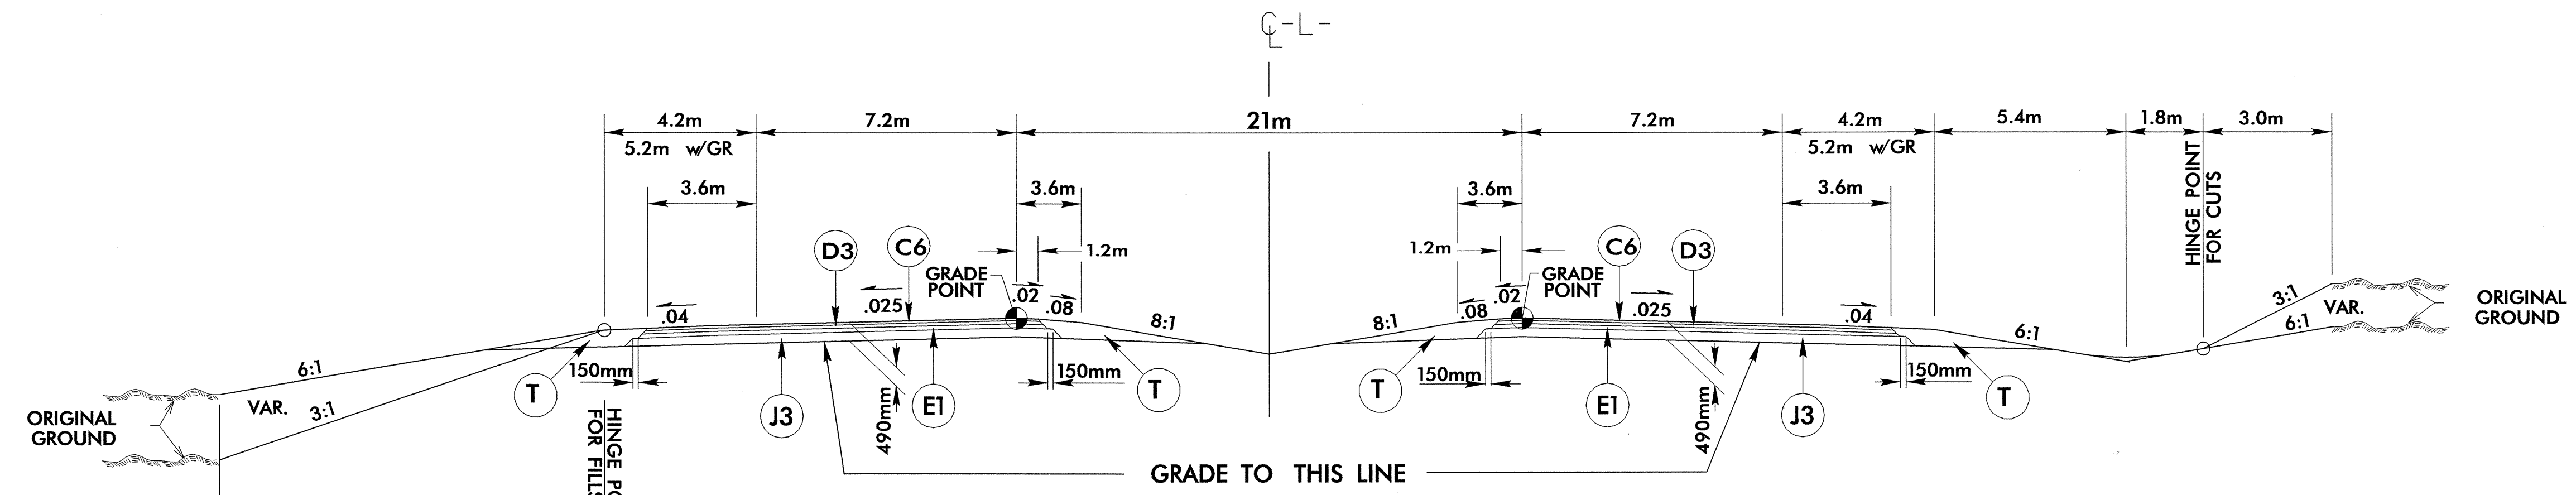

TYPICAL SECTION NO. IA
-L- Sta. 10+60 - Sta. 85+80

21-SEP-2004 0:15:33 JPHetfield AT 10/1/04