

METRIC

5 0 10

CONST. REV.

R/W REV.

PROJECT REFERENCE NO. R-0513A	SHEET NO. EC-3/CONST.4
R/W SHEET NO.	HYDRAULICS ENGINEER
ROADWAY DESIGN ENGINEER	

NOTE:
TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 1 METER FROM TOE OF FILL IN WETLAND AREAS

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 4

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

DATUM DESCRIPTION


THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY NCGS FOR MONUMENT "WYE" WITH NAD 85 STATE PLANE GRID COORDINATES OF

NORTHING: 103917.8673(m) EASTING: 585865.5688(m)

THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT (GROUND TO GRID) IS: .999926000

THE N.C. LAMBERT GRID BEARING LOCALIZED HORIZONTAL GROUND DISTANCE FROM "WYE" TO -L- STATION 10+00.000 IS 6,520.6271m S 51 16' 44.301" E


ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES VERTICAL DATUM USED IS NGVD 29

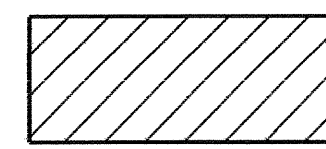 ENVIRONMENTALLY SENSITIVE AREA
SEE PROJECT SPECIAL PROVISIONS

PARAMOUNT PAPER LTD
DB 934 PG 354

BEGIN CONSTRUCTION
TIP PROJECT R-0513A
-L- POT Sta. 8+73.366
SEE DETAIL SHEET 2K & 2L

BEGIN TIP PROJECT R-0513A
-L- POT STA. 10+00.000

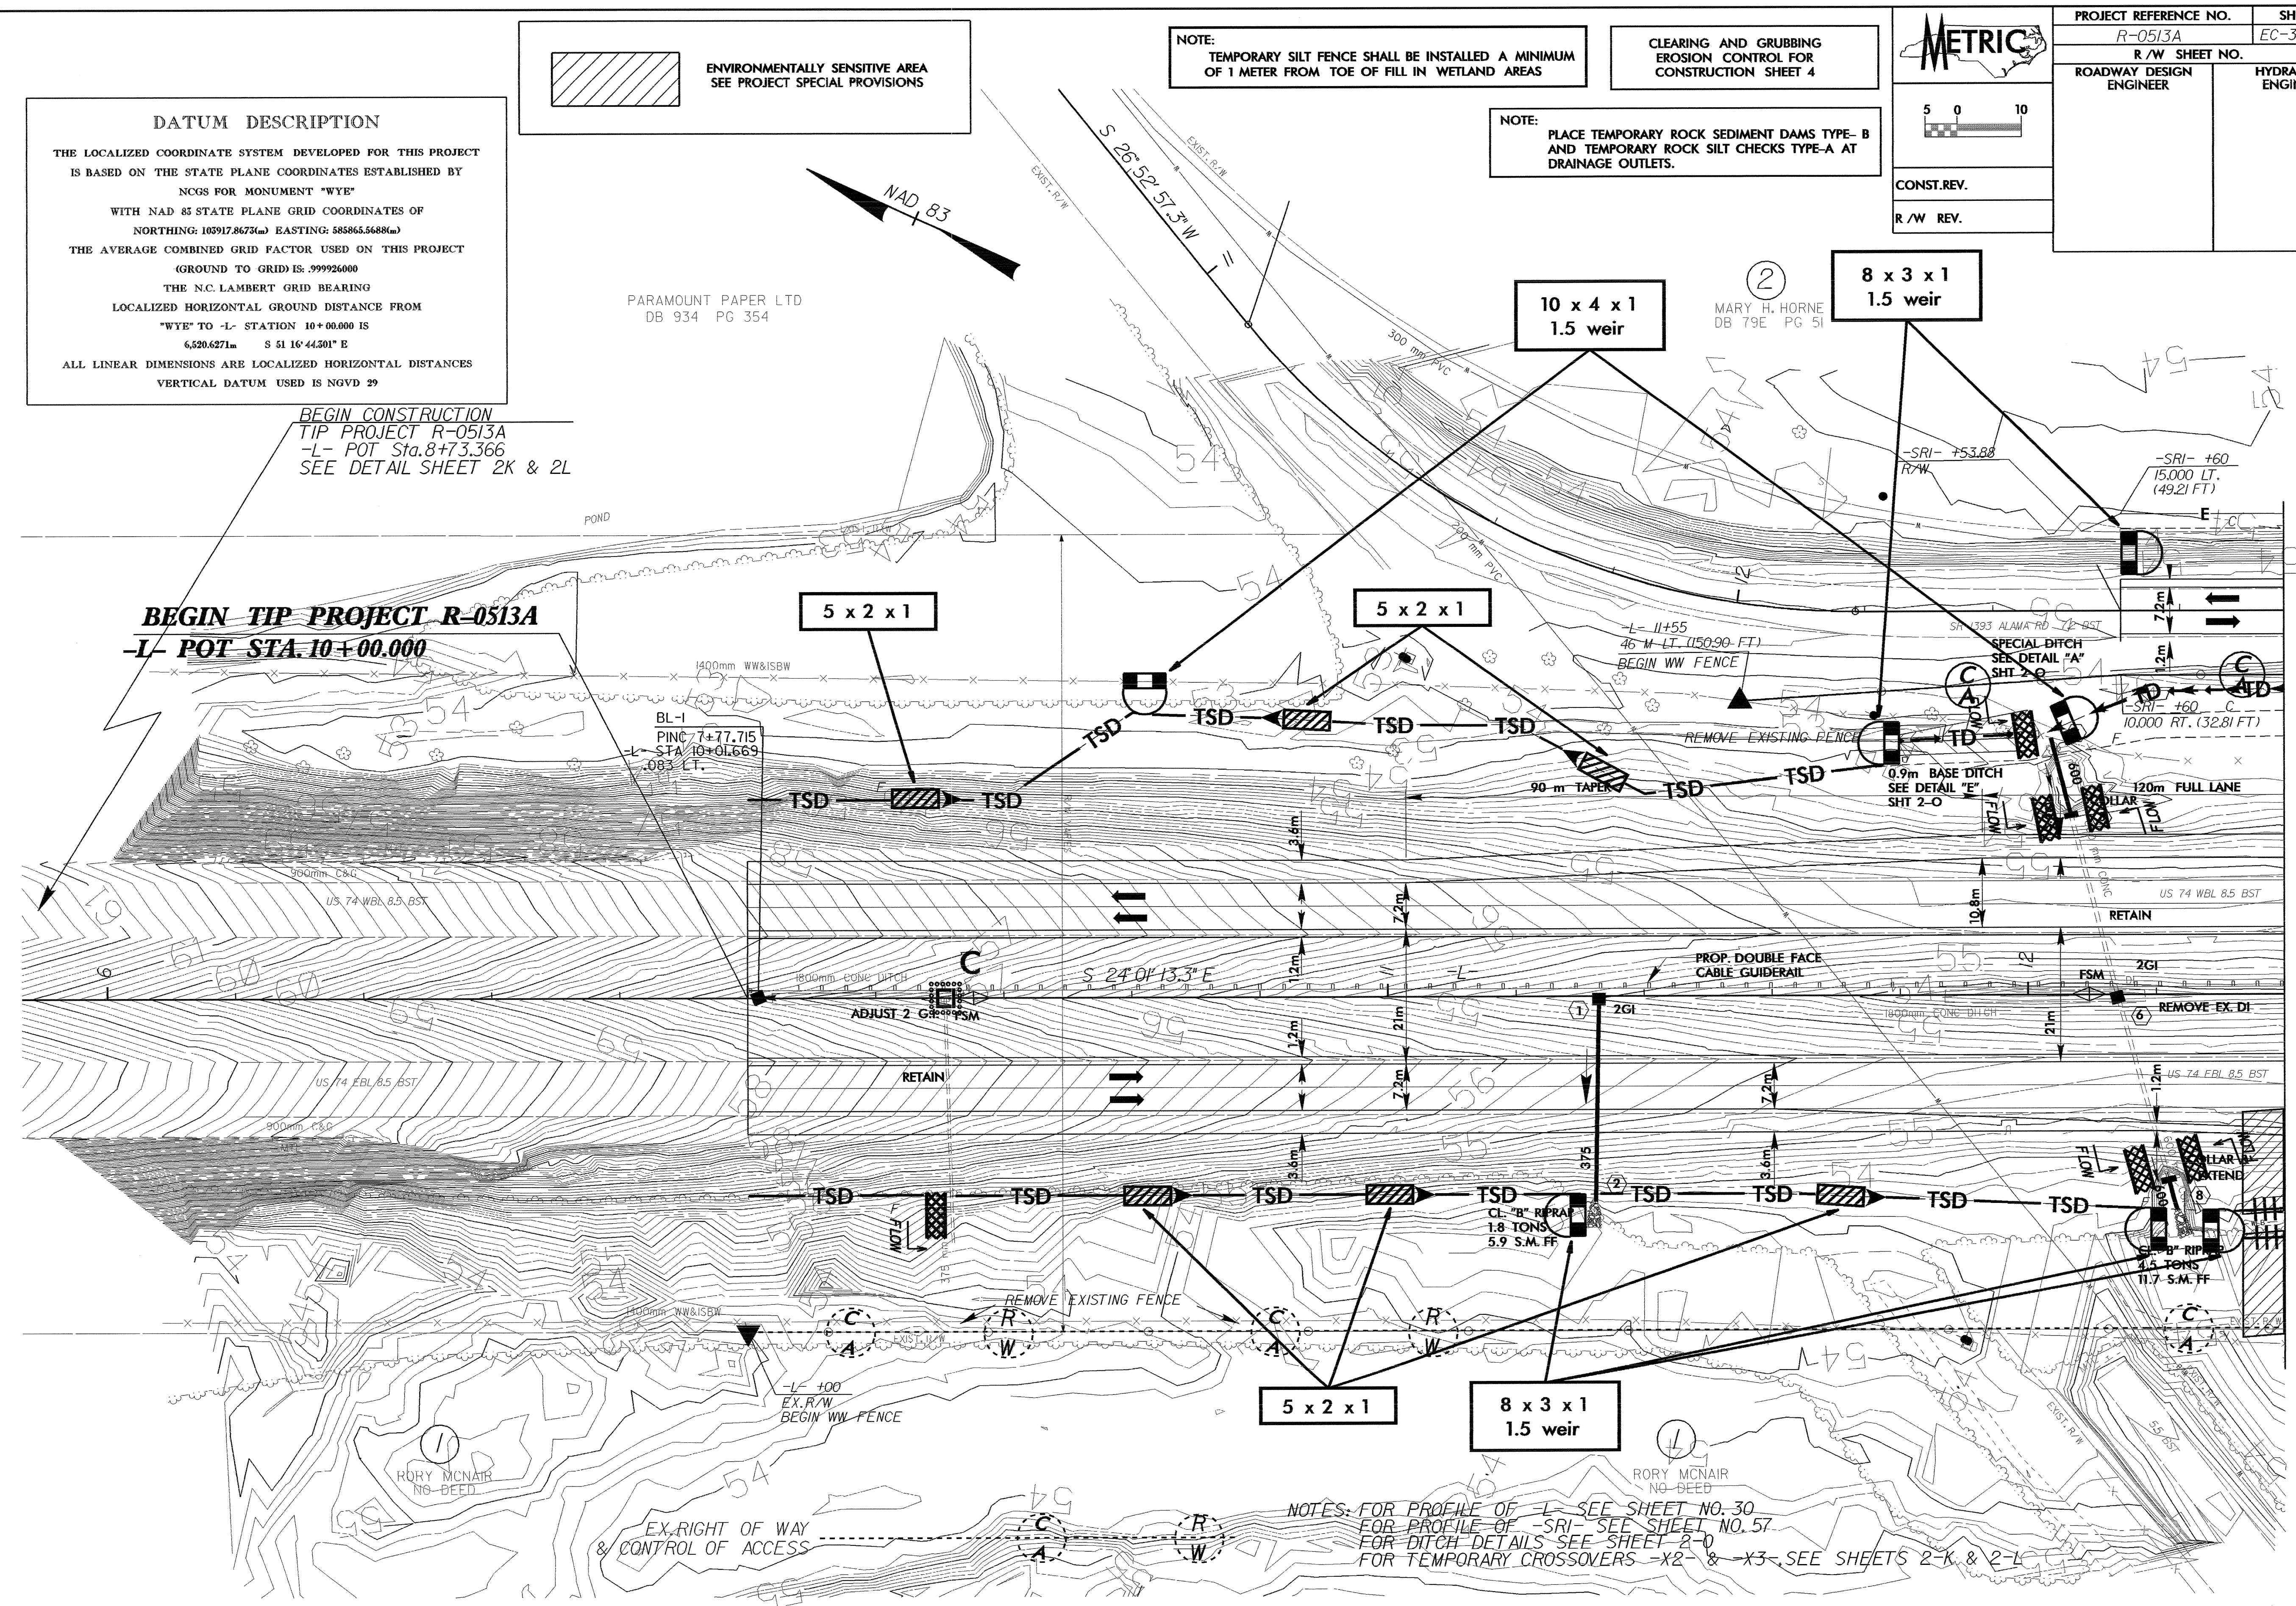

NOTES:
FOR PROFILE OF -L- SEE SHEET NO. 30
FOR PROFILE OF -SRI- SEE SHEET NO. 57
FOR DITCH DETAILS SEE SHEET 2-0
FOR TEMPORARY CROSSOVERS -X2- & -X3- SEE SHEETS 2-K & 2-L

MATCHLINE SEE SHEET 5 -L- Sta. 12 + 40