


8/07/99

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 9




PROJECT REFERENCE NO. R-0513BA	SHEET NO. EC-8/CONST.9
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
CONST. REV.	
R/W REV.	

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

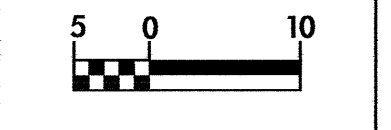

NOTE: USE FABRIC FOR SOIL STABILIZATION IN LIEU OF UNDERCUT AT
-L- STA.105+40 TO 107+55; PLACE ON NATURAL GROUND TO
A DISTANCE OF 0.6m BEYOND EDGE OF PROP.PAVEMENT
QUANTITY = 5676 SM

-L-
PI Sta. 105+22.510
 $\Delta = 2' 30'' 40.8''$ (RT)
L = 306.817
T = 153.433
R = 7,000.000
SE = NC

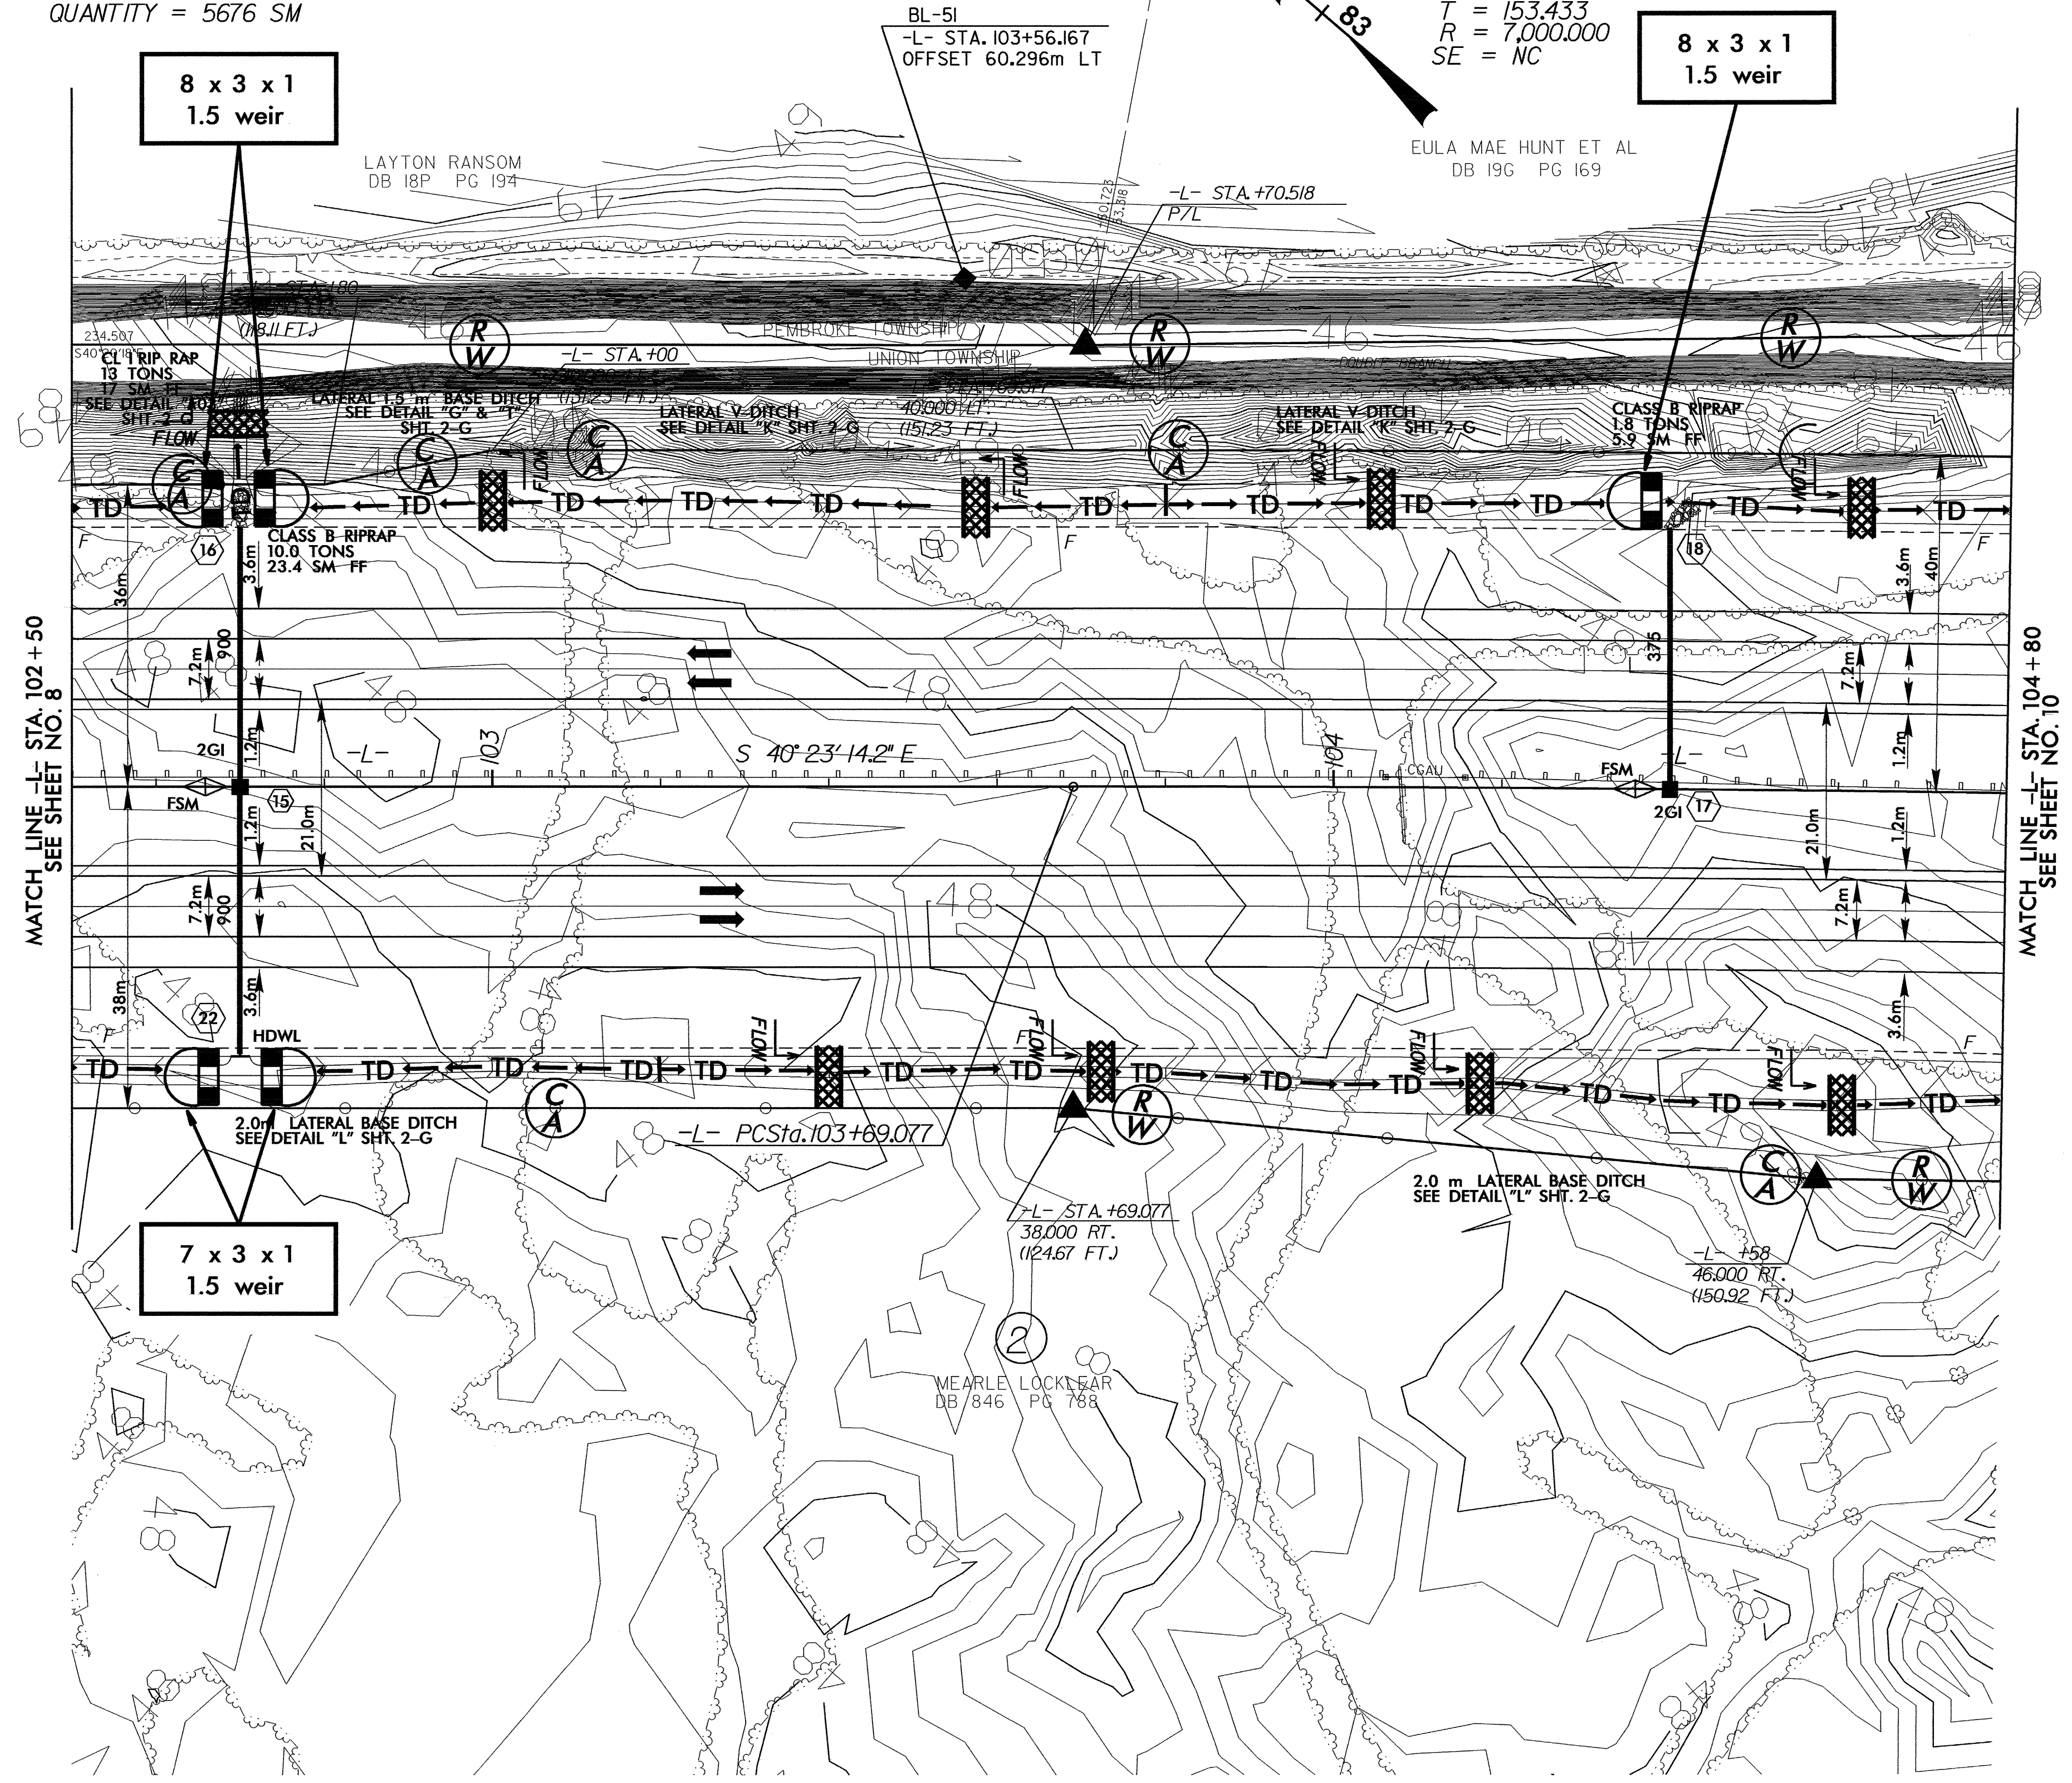

MATCH LINE -L- STA. 102 + 50
SEE SHEET NO. 8

MATCH LINE -L- STA. 104 + 80
SEE SHEET NO. 10

NOTE: FOR PROFILE OF -L-, SEE SHEET NO. 29