

TABLE FOR PLATE SETTING DATA TEMPERATURE AT TIME OF SETTING END BENT 1 END BENT 2

© 49mm Ø HOLES FOR 38.10mm Ø ANCHOR BOLTS

(TYP.)

*CORRECTION FOR END ROTATION DUE TO WEIGHT OF SLAB AND COMPOSITE DEAD LOAD. TEMPERATURE SETTING DETAIL

(EXPANSION POT BEARINGS)

32° C

0

16° C

TAB	LE FOR	LO	ADS	AND	MOVEN	MENTS
BEARING	LOCATION	VERT DEAD	ICAL L	OAD (KN) TOTAL	LATERAL LOAD (kN)	TOTAL MOVEMENT (mm)
PB1 (FIX)	END BENT 1	974	379	1353	195	0
PB2 (EXP.)	END BENT 2	974	379	1353	195	48

NOTES

FOR POT BEARINGS, SEE SPECIAL PROVISIONS.

AT ALL POINTS OF SUPPORT IN SPAN A. NUTS FOR ANCHOR BOLTS SHALL BE TIGHTENED FINGER TIGHT AND GIVEN AN ADDITIONAL 1/4 TURN. THE THREAD OF THE NUT AND BOLT SHALL THEN BE BURRED WITH A SHARP POINTED TOOL.

WHEN WELDING THE SOLE PLATE TO THE GIRDER, USE TEMPERATURE INDICATING WAX PENS, OR OTHER SUITABLE MEANS, TO ENSURE THAT THE TEMPERATURE OF THE BEARING DOES NOT EXCEED 121°C. TEMPERATURES ABOVE THIS MAY DAMAGE THE TFE OR ELASTOMER.


AFTER BEARING ASSEMBLY IS IN PLACE AND ANCHOR BOLTS HAVE BEEN FINALLY POSITIONED. THEY SHALL BE GROUTED IN PLACE AS SHOWN.

THE CLOSURE PLATE AND STANDARD PIPE FOR THE PIPE SLEEVE ASSEMBLY NEED NOT BE GALVANIZED.


SOLE PLATES SHOULD BE WELDED TO BEAM FLANGES AND ANCHOR BOLTS SHOULD BE GROUTED BEFORE FALSEWORK IS PLACED.

ALL SURFACES OF BEARING PLATES SHALL BE SMOOTH AND STRAIGHT. FOR THERMAL SPRAYED COATINGS (METALLIZATION), SEE SPECIAL PROVISIONS.


THE CONTRACTOR MAY SUBSTITUTE DISC BEARINGS FOR THE POT BEARINGS SHOWN. FOR OPTIONAL DISC BEARINGS, SEE SPECIAL PROVISIONS.

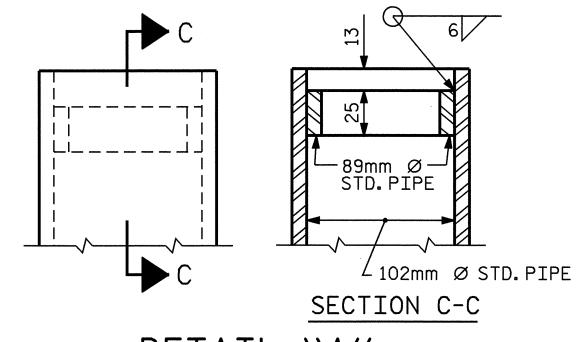

DETAIL

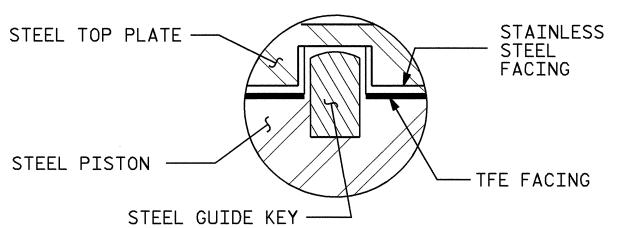

GUIDE KEY DETAIL

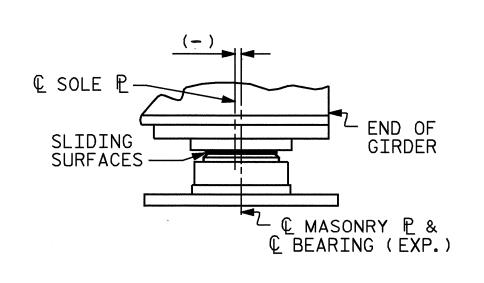

11 259

PROJECT NO. R-513BA ROBESON COUNTY STATION: 138+30.800 -L-

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

STANDARD

POT BEARING DETAILS

(LEFT LANE)

	SHEET NO.				
BY:	DATE:	NO.	BY:	DATE:	9-131
		3			TOTAL SHEETS
		4			172

PR1SM_STD STR 3

DATE : JUL.2003 DATE : 4-14-04 CHECKED BY : T. A. WALTER ADDED 8/16/99 REV.10/17/00 RWW/LES REV.7/10/01 LES/RWW DRAWN BY: RWW 8/99 CHECKED BY: LES 8/99

ASSEMBLED BY : N. Q. TRAN

MASONRY PLATE DETAILS

PLAN

M1 (8 REQ'D.)

@ MASONRY P