


NOTE: UTILIZE SPECIAL STILLING BASIN, AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE- B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

PROJECT REFERENCE NO. I-4025A	SHEET NO. EC-4/CONST.2-D
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

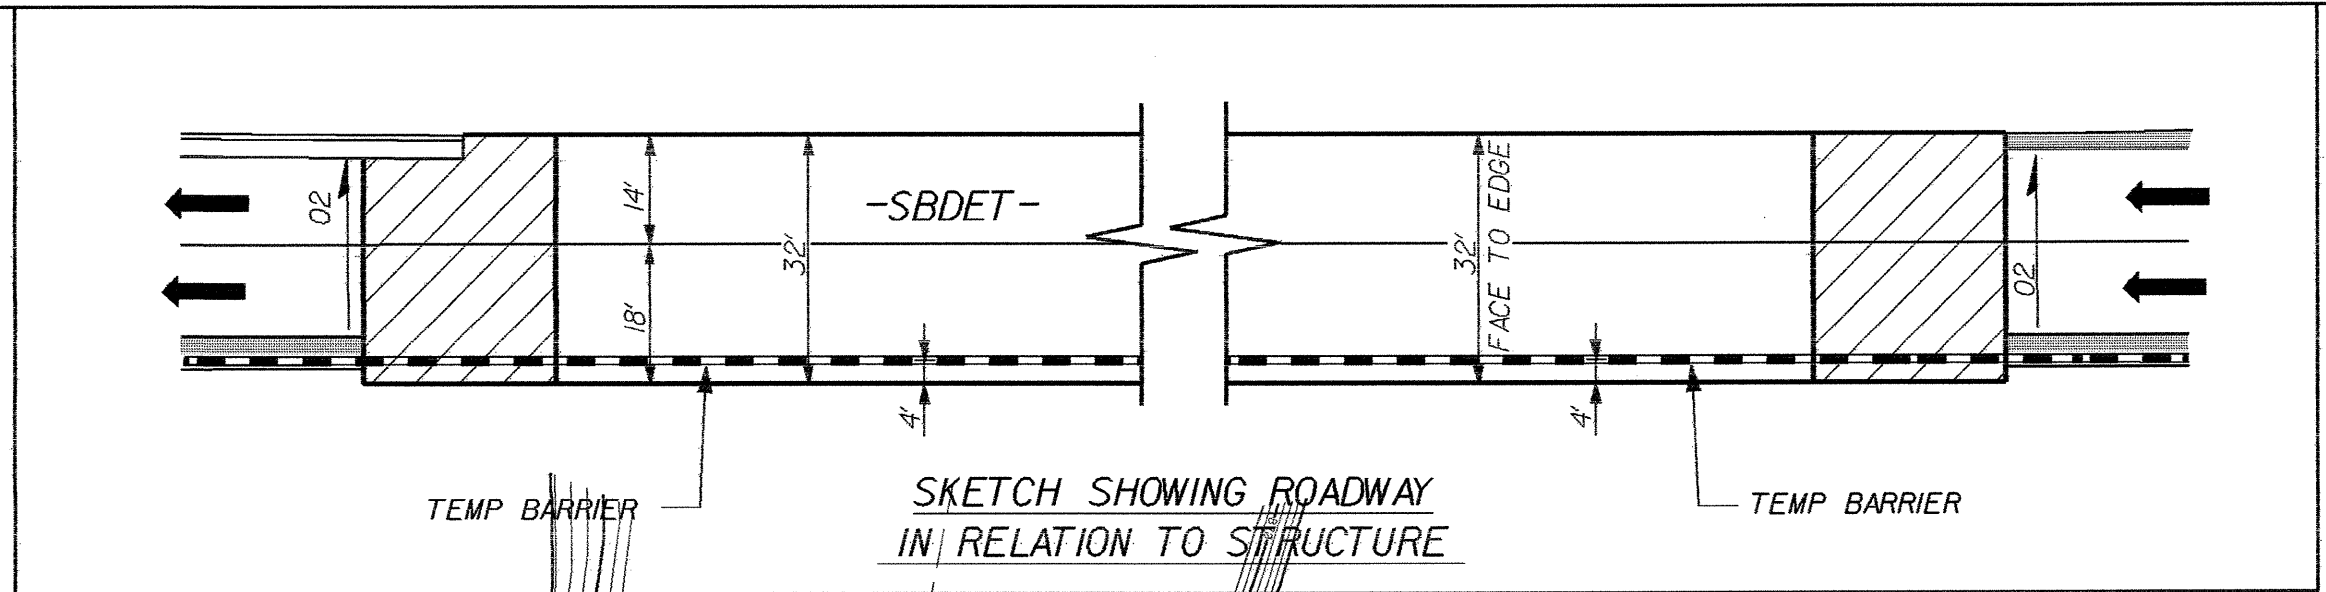

NAD 83 / NC GRID




CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 2-D

-SBD E T-
PI Sta 21+37.70
Δ = 3' 17" 59.6" (RT)
D = 0' 30' 00.0"
L = 659.98'
T = 330.08'
R = 11,459.16'
SE = NC
DS = 55 MPH

-SBD E T-
PI Sta 37+24.42
Δ = 3' 48" 36.7" (RT)
D = 0' 30' 00.0"
L = 762.04'
T = 381.16'
R = 11,459.16'
SE = NC
DS = 55 MPH

-MATCHLINE- STA. 23+00 SEE SHEET NO. 2-C

-MATCHLINE- STA. 36+50 SEE SHEET NO. 2-E

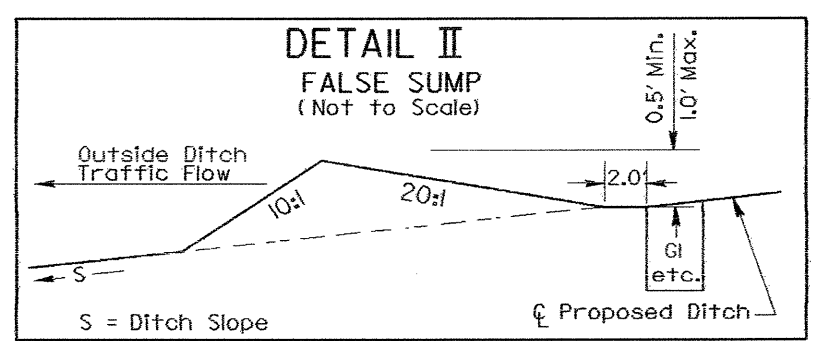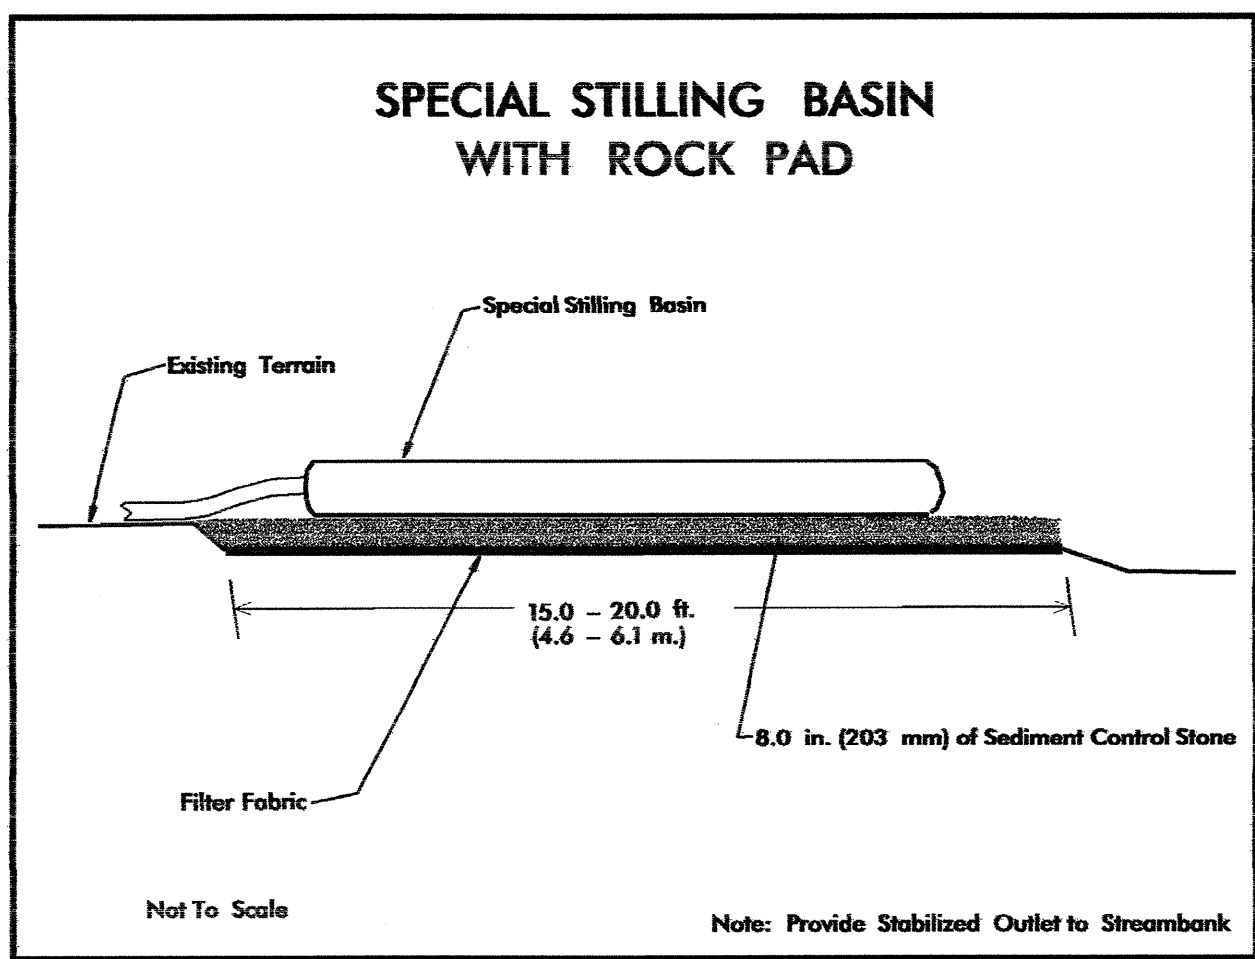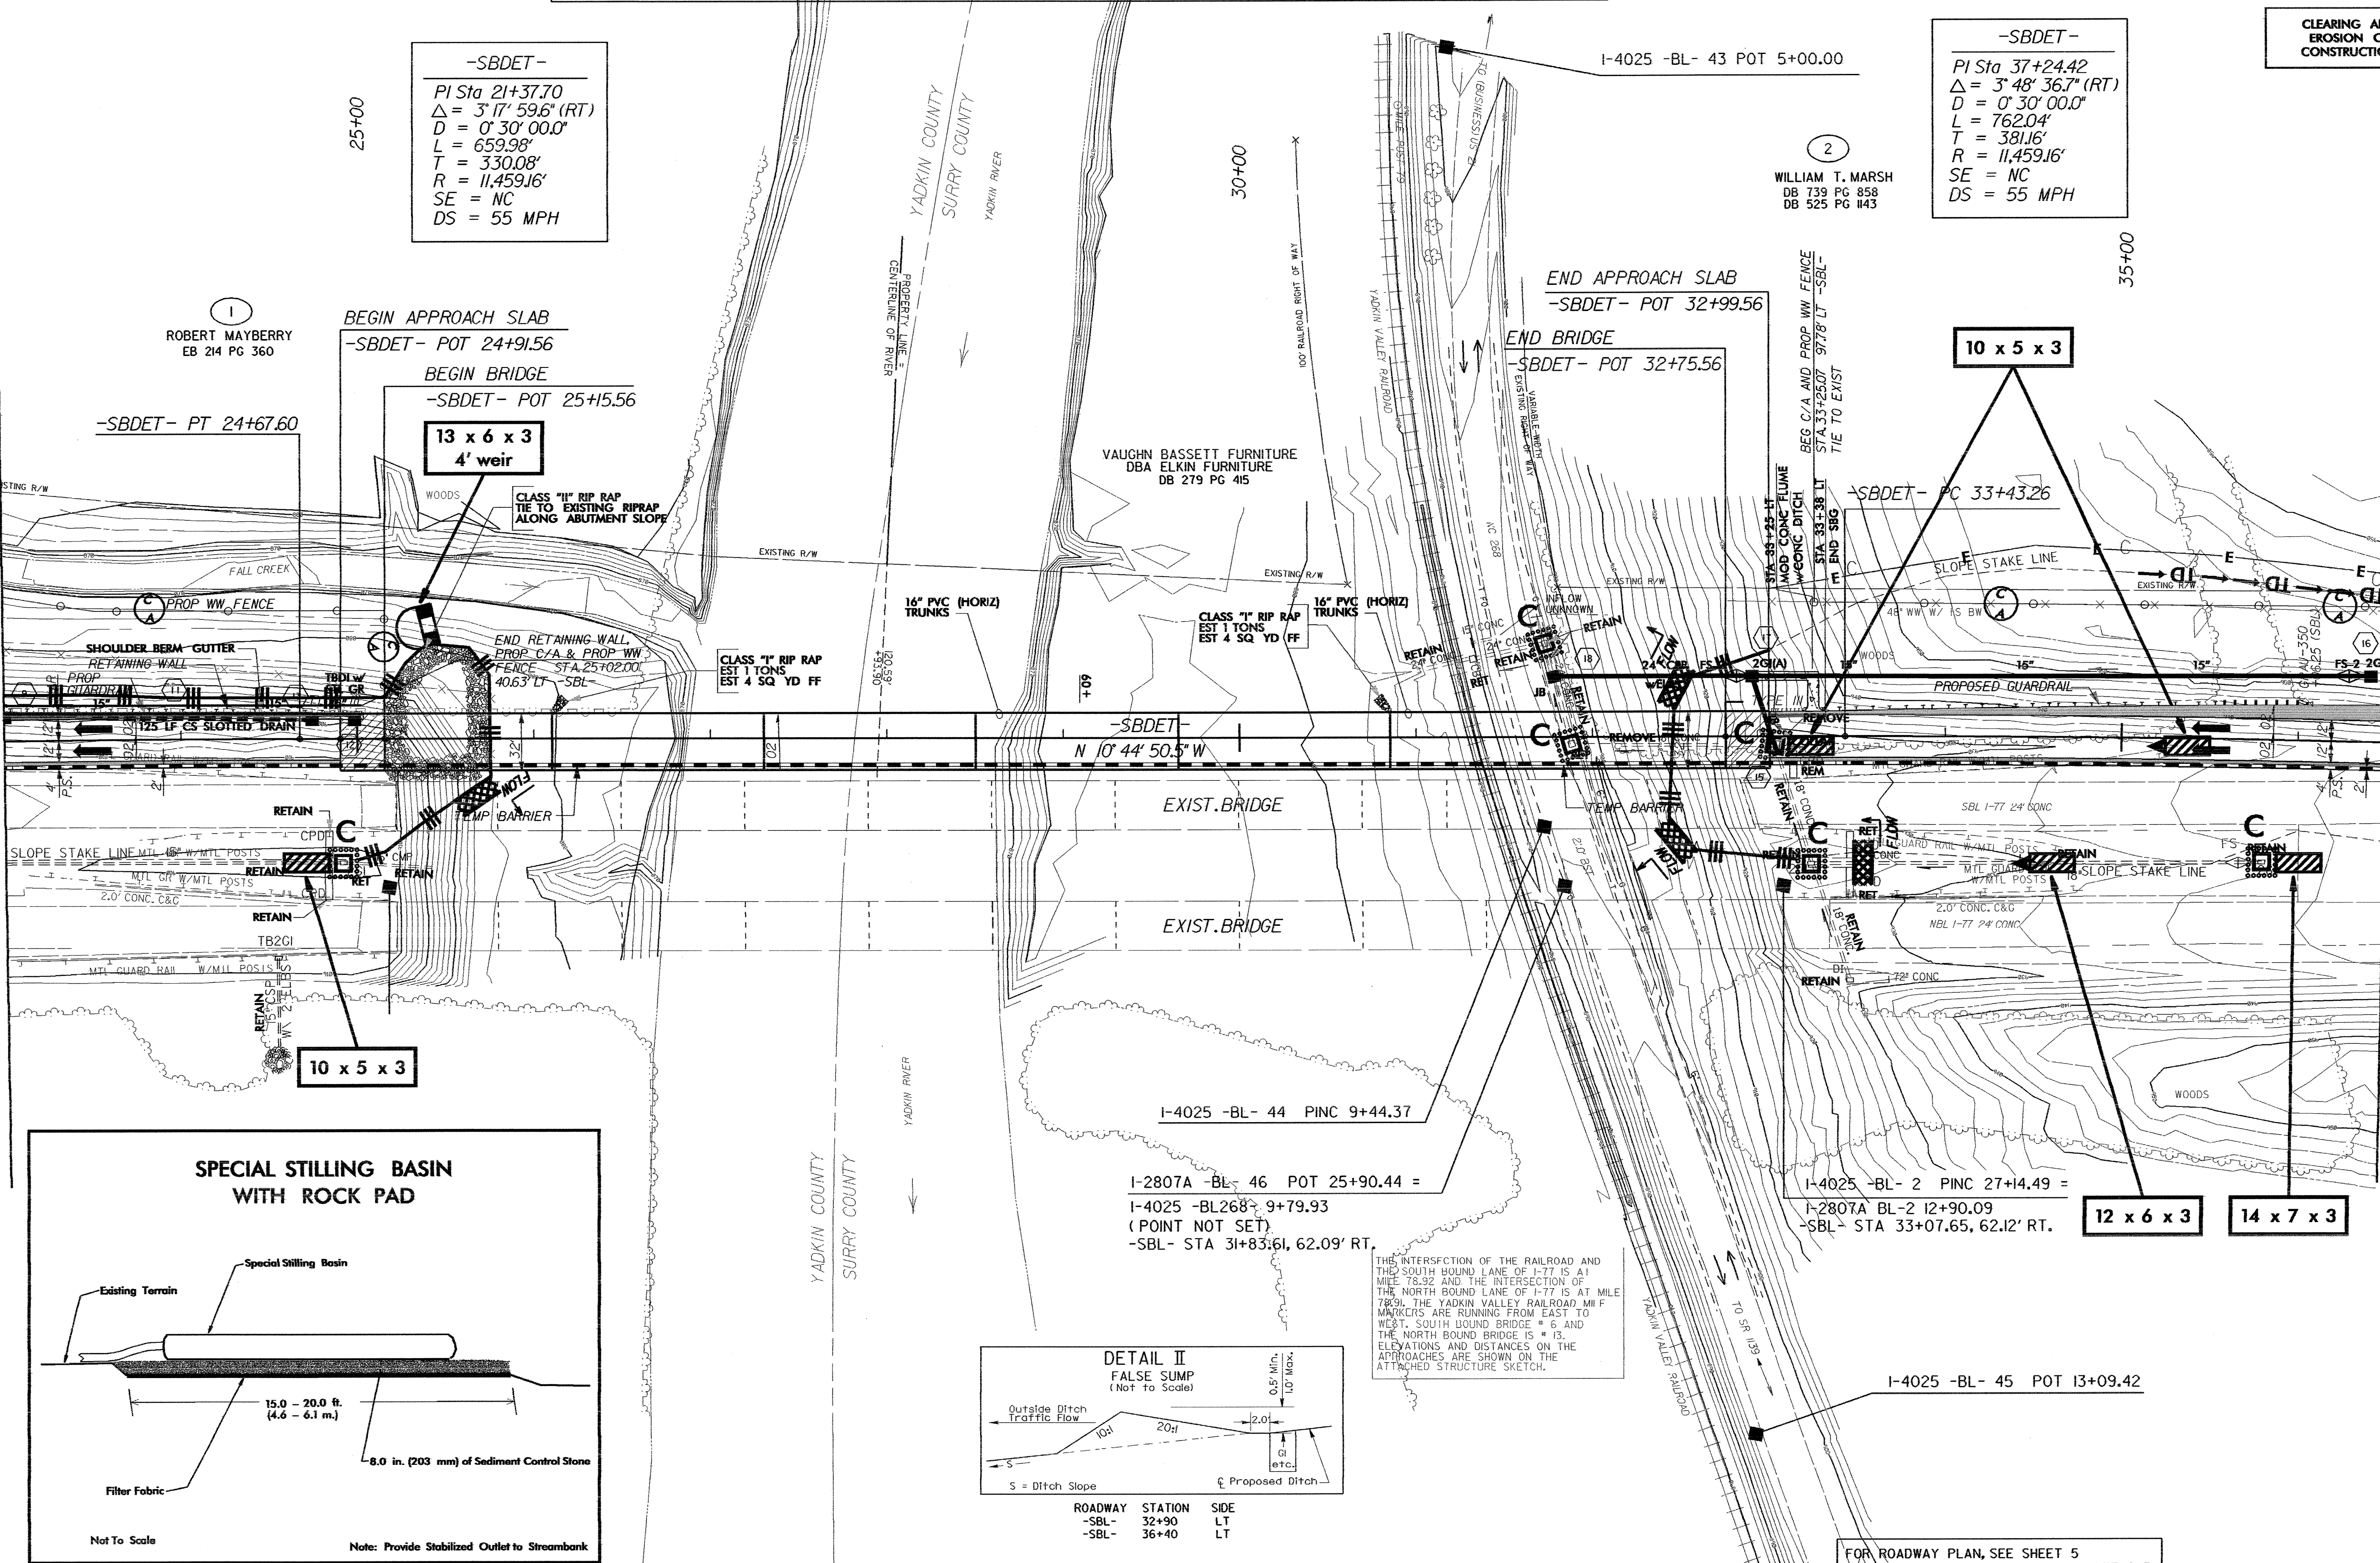

ROADWAY	STATION	SIDE
-SBL-	32+90	LT
-SBL-	36+40	LT

FOR ROADWAY PLAN, SEE SHEET 5
FOR RETAINING WALL DETAIL, SEE SHEET 2-F