


08/25/19


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 13

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.



CONST. REV.
R/W REV.

PROJECT REFERENCE NO. R-2562C	SHEET NO. EC-13/CONST.13
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

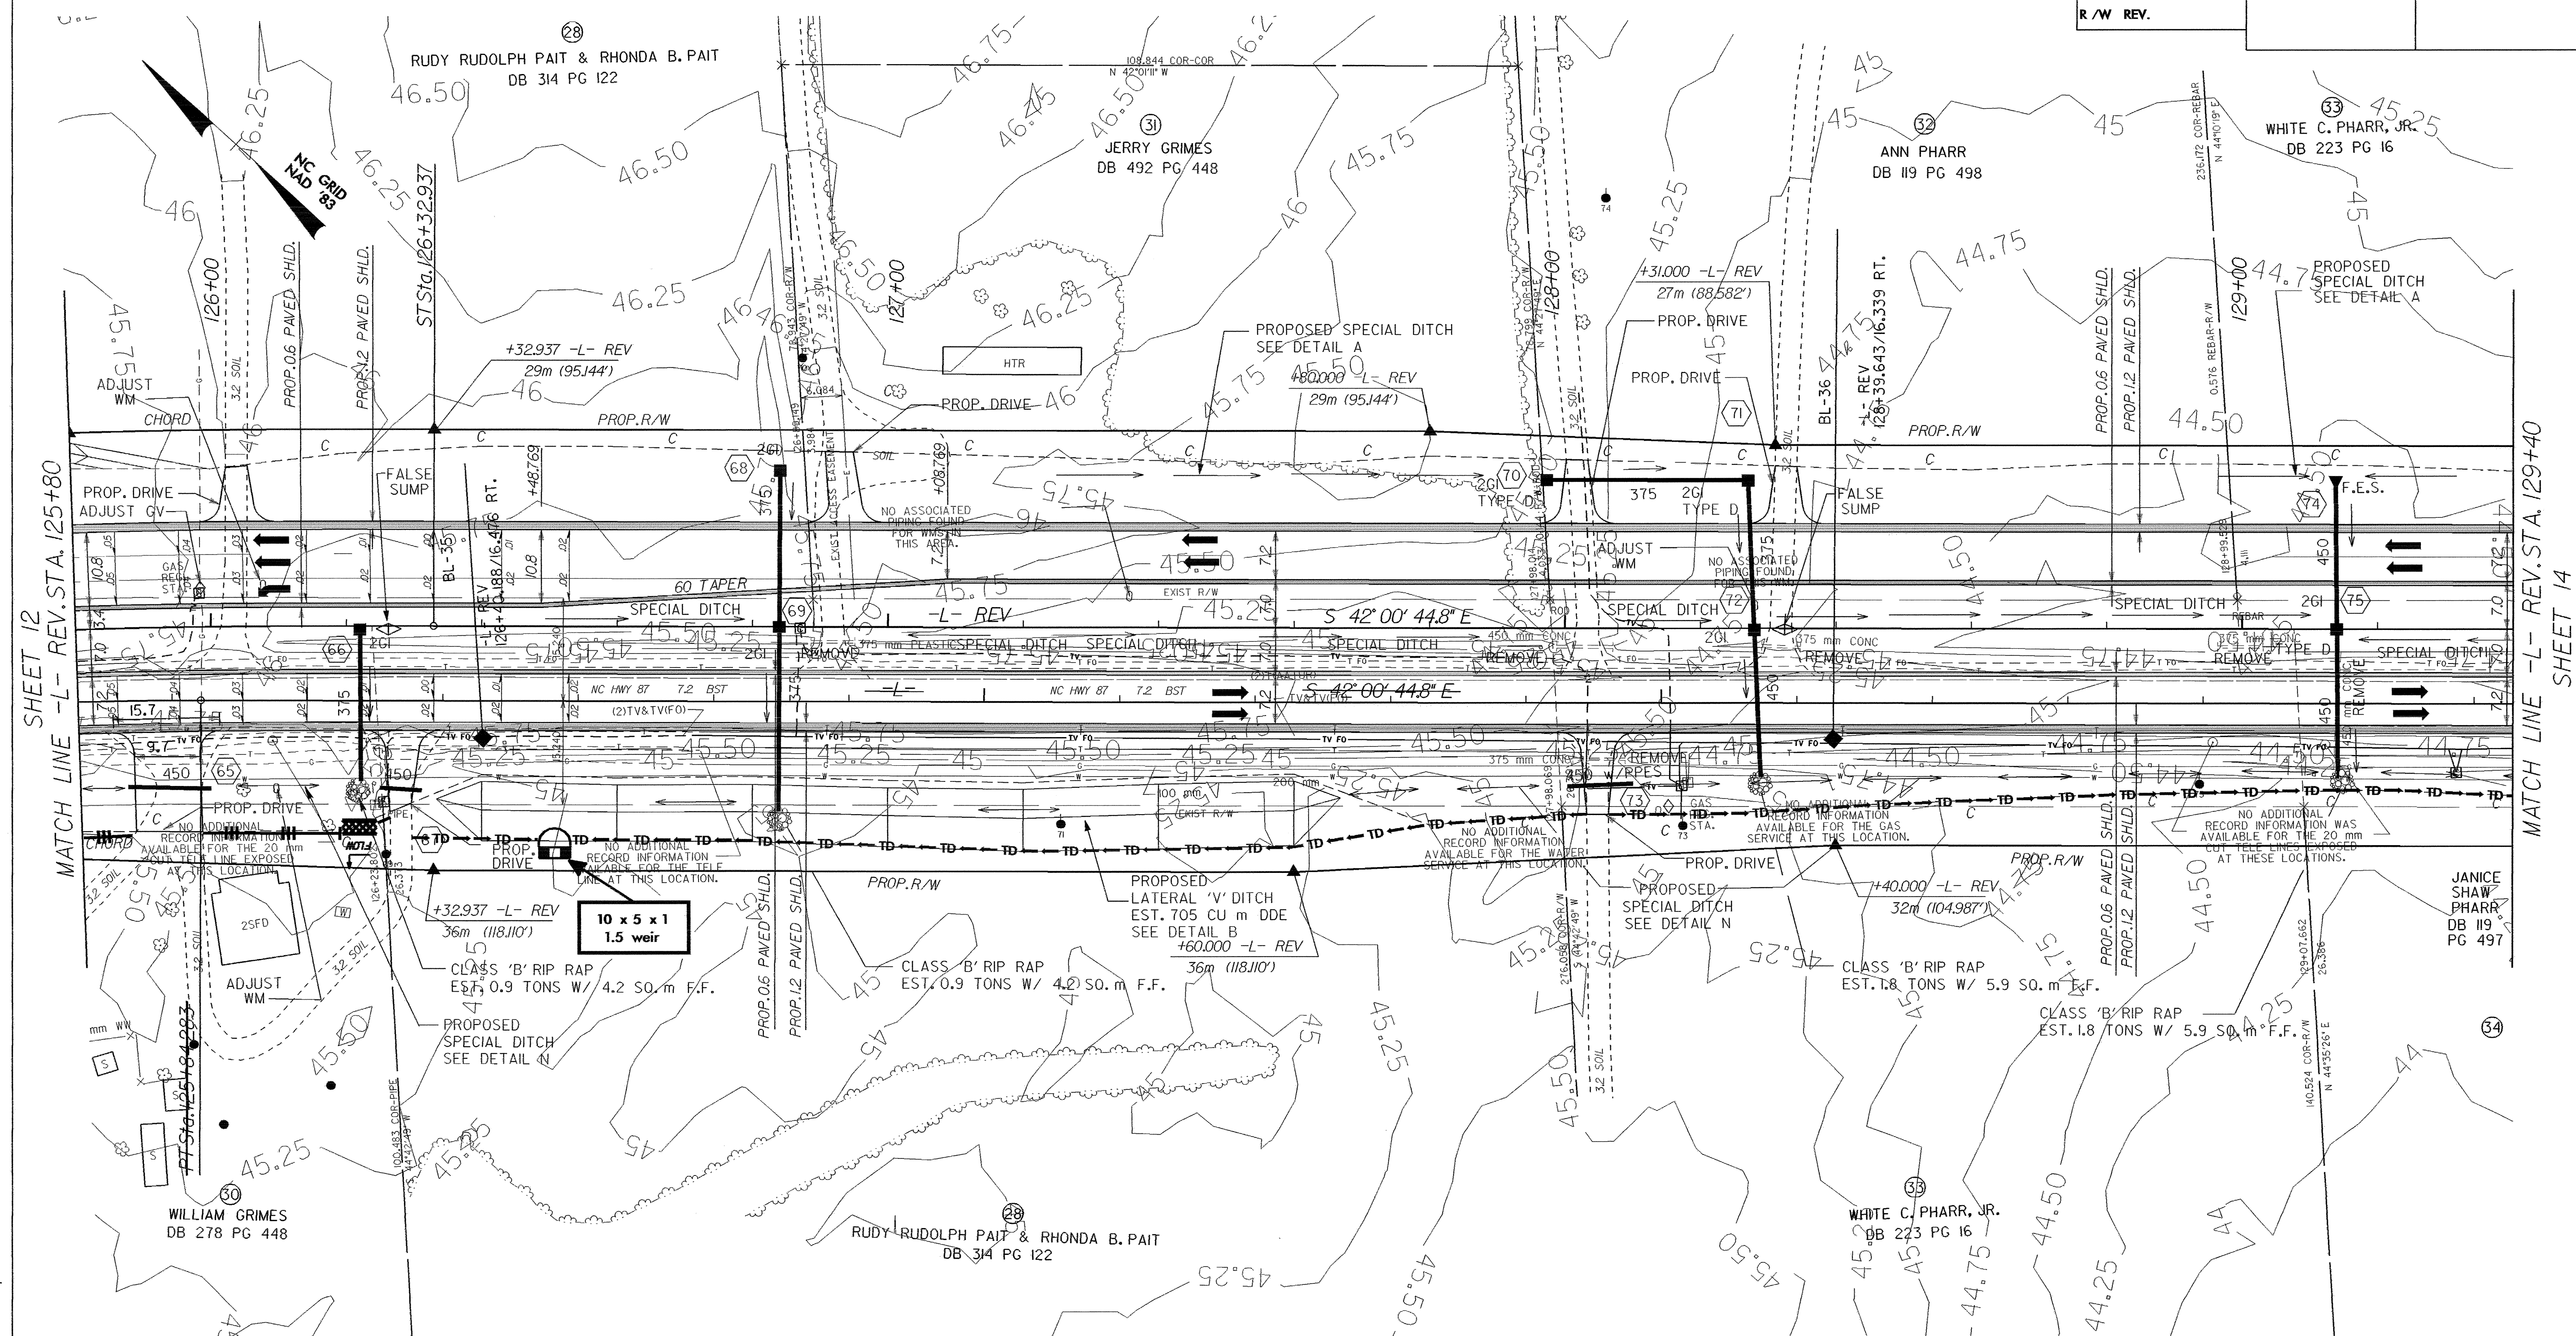

SHEET 12
MATCH LINE -L- REV. STA. 125+80

MATCH LINE -L- REV. STA. 129+40
SHEET 14

-L- REV CURVE DATA

Pls Sta 121+77.991	Pls Sta 123+89.699	Pls Sta 125+89.609
$\theta_s = 3^{\circ}04'40.3''$	$\Delta = 34^{\circ}52'41.1''$ (RT)	$\theta_s = 3^{\circ}04'40.3''$
$L_s = 65.000$	$L = 368.286$	$L_s = 65.000$
$LT = 43.34$	$T = 190.048$	$LT = 43.34$
$ST = 21.673$	$R = 605.000$	$ST = 21.673$
	$SE = 0.069$	

- DRIVEWAY NOTES:**
1. ALL PROP. DRIVEWAY RADII 3.0m UNLESS OTHERWISE SHOWN.
 2. PROP. DRIVEWAY WIDTHS AT END OF RADII SHALL BE 4.9m MIN. UNLESS OTHERWISE SHOWN. TAPER DRIVEWAY TO EXISTING DRIVEWAY WIDTH.

SEE SHEET 36 FOR -L- REV. PROFILE

28-OCT-2019 10:54 AM d:\REIN\19-2562\Roadway\proj\2562c.ecad13.dwg