
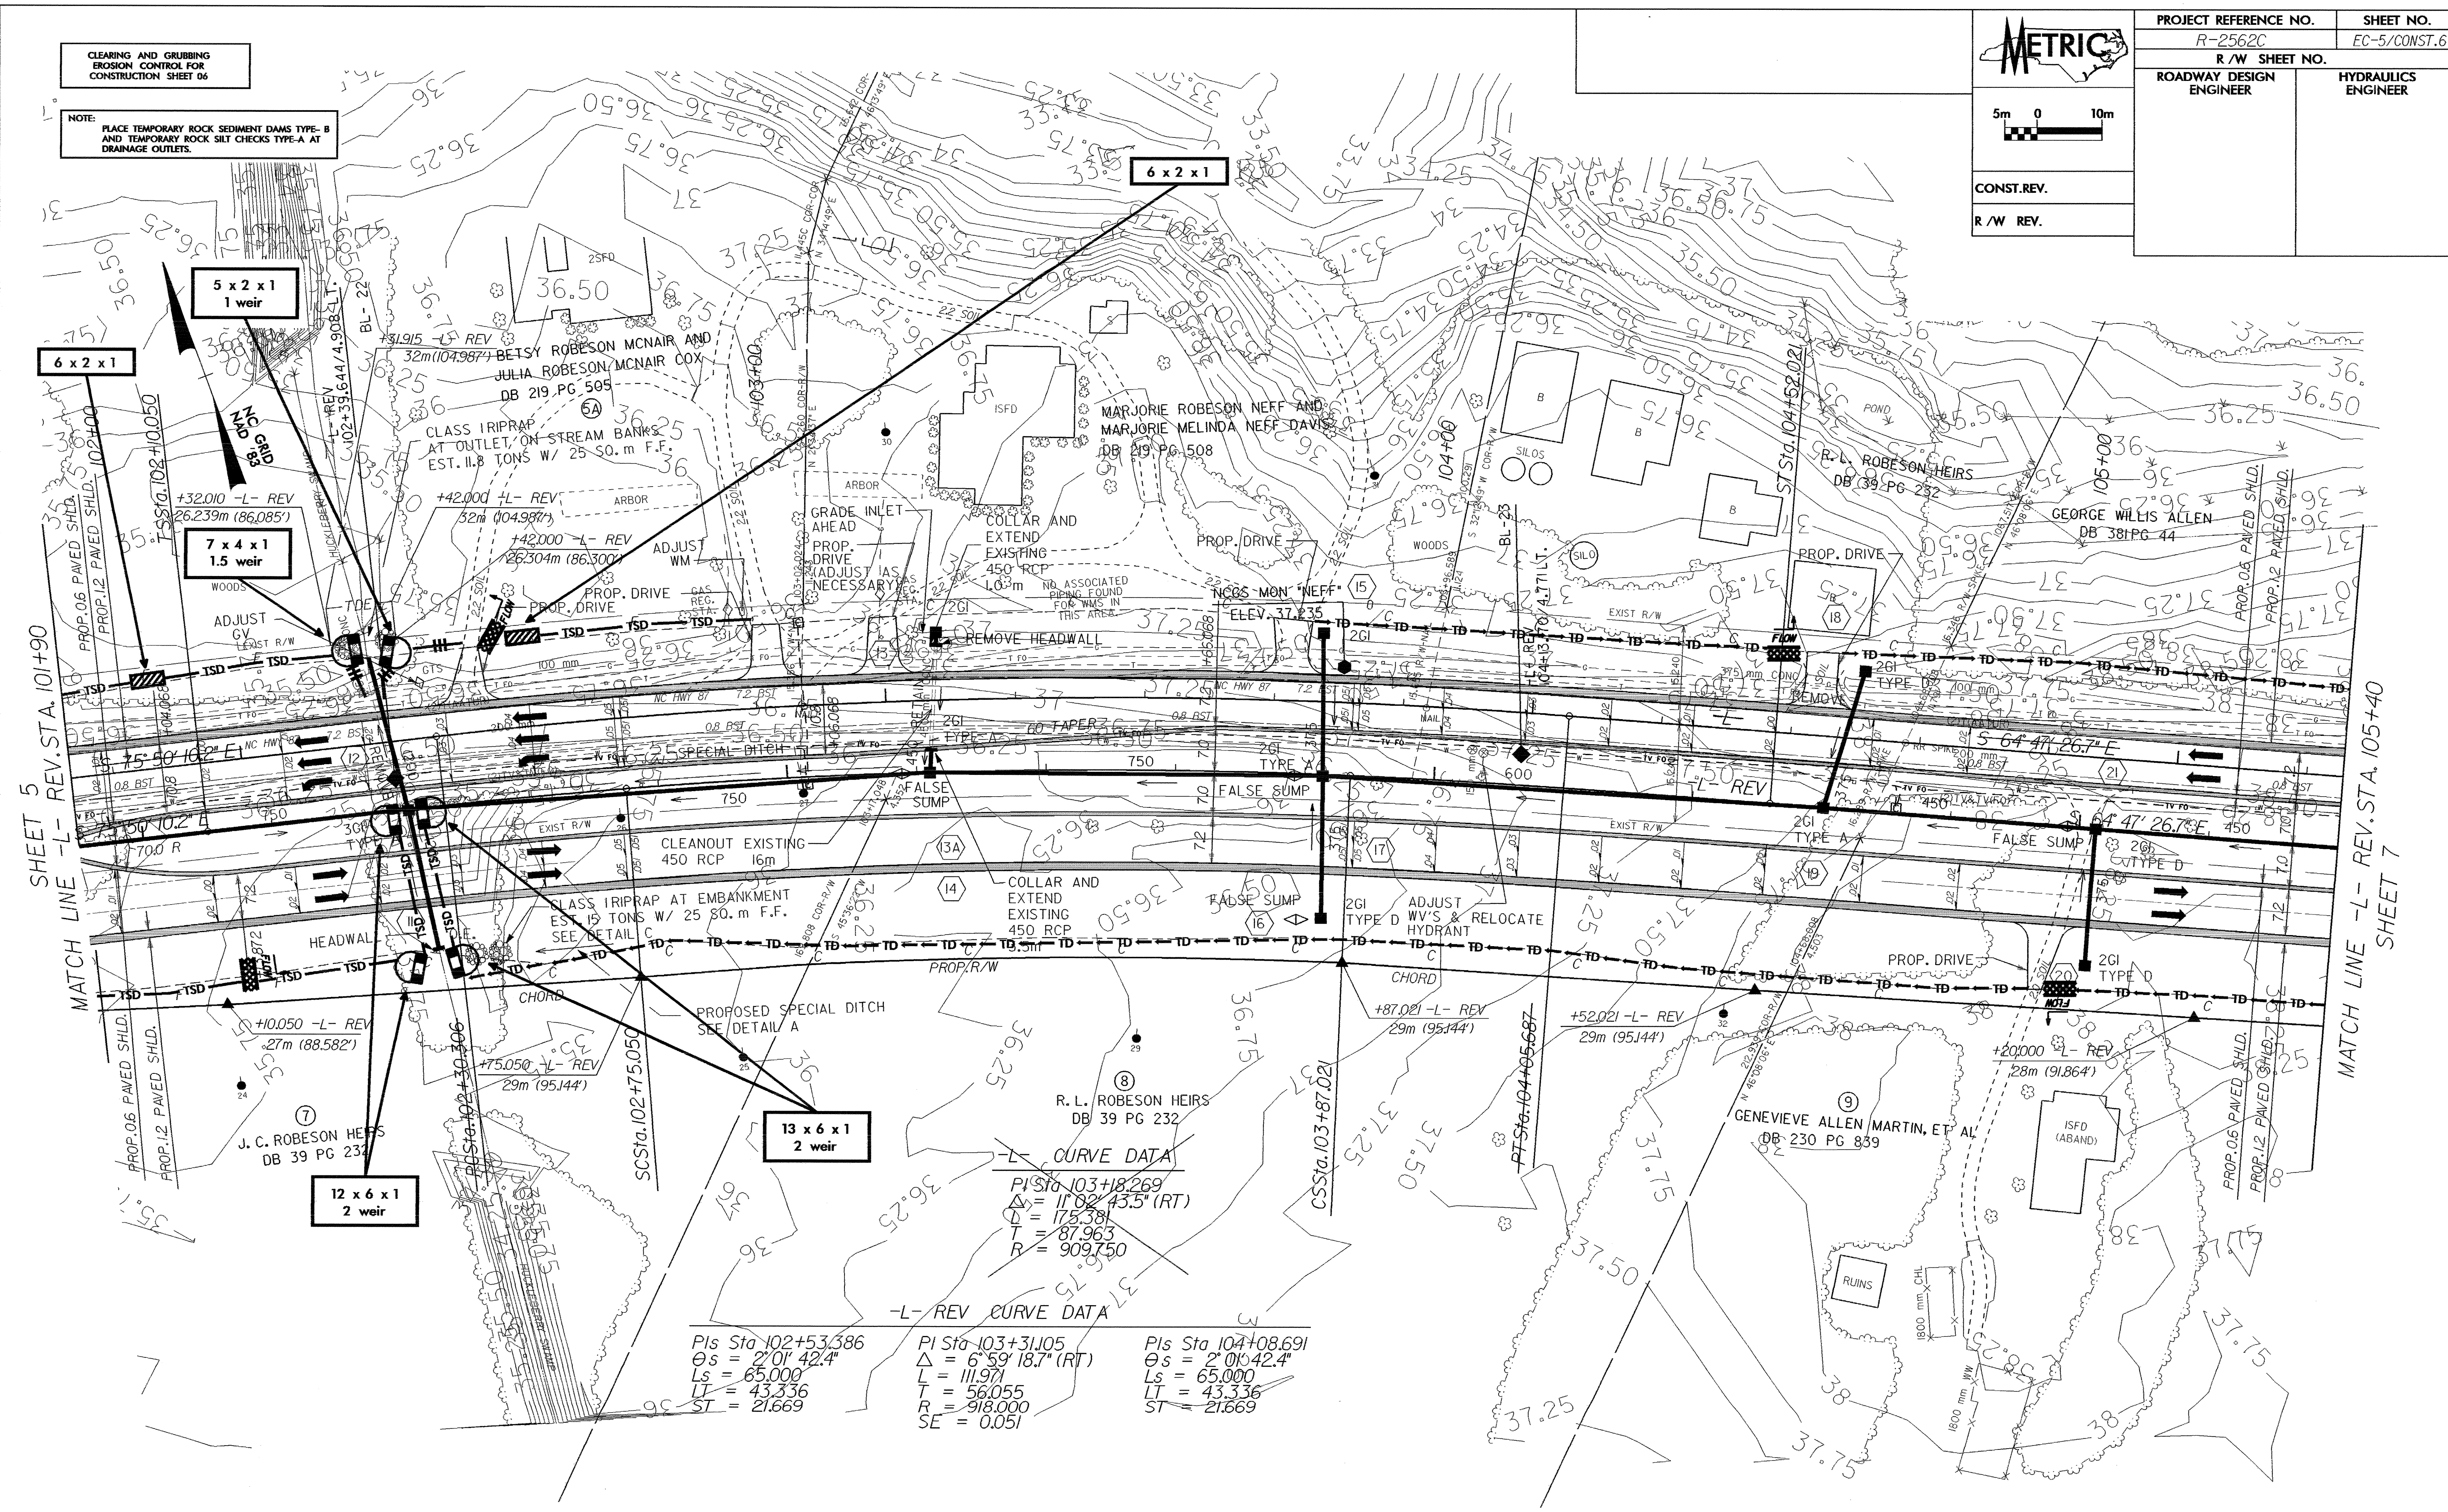


CLEARING AND GRUBBING  
EROSION CONTROL FOR  
CONSTRUCTION SHEET 06

NOTE:  
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B  
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT  
DRAINAGE OUTLETS.

 5m 0 10m CONST. REV. R/W REV.	PROJECT REFERENCE NO. R-2562C	SHEET NO. EC-5/CONST.6
	R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER	



**-L- CURVE DATA**  
 PI Sta 103+18.269  
 $\Delta = 11^{\circ}02'43.5"$  (RT)  
 $L = 175.381$   
 $T = 87.963$   
 $R = 909.750$

**-L- REV CURVE DATA**

PI Sta 102+53.386 $\Delta s = 2^{\circ}01'42.4"$ $Ls = 65.000$ $LT = 43.336$ $ST = 21.669$	PI Sta 103+31.105 $\Delta = 6^{\circ}59'18.7"$ (RT) $L = 111.971$ $T = 56.055$ $R = 918.000$ $SE = 0.051$	PI Sta 104+08.691 $\Delta s = 2^{\circ}01'42.4"$ $Ls = 65.000$ $LT = 43.336$ $ST = 21.669$
--	--	--

- DRIVEWAY NOTES:**
- ALL PROP. DRIVEWAY RADII 3.0m UNLESS OTHERWISE SHOWN.
  - PROP. DRIVEWAY WIDTHS AT END OF RADII SHALL BE 4.9m MIN. UNLESS OTHERWISE SHOWN. TAPER DRIVEWAY TO EXISTING DRIVEWAY WIDTH.

SEE SHEET 33 FOR -L- REV. PROFILE

08/25/09  
 086.pch  
 086 REV