




NOTE:  
FOR THE 5-LANE SECTION, THE PROPOSED PROFILE IS AT THE GRADE POINT OF -L- REV AND THE EXISTING PROFILE IS LOCATED DIRECTLY UNDER THE GRADE POINT OF -L- REV. FOR THE 4-LANE DIVIDED SECTION, THE PROPOSED PROFILE IS AT THE GRADE POINT OF BOTH -L- REV(L) AND -L- REV(R), AND THE EXISTING PROFILE IS DIRECTLY UNDER THE GRADE POINT ON THE SIDE WHERE EXISTING PAVEMENT IS UNDER PROPOSED PAVEMENT.

CONST. REV.  
R/W REV.

BM#6: ELEV. 45.417m SURVEY BL STA 38+56 OFFSET 64m RIGHT  
RR SPIKE SET IN ROOT OF 24" PINE TREE

SAMPLE NO.	STATION OFFSET	DEPTH INTERVAL	AASHTO CLASS	% BY WEIGHT			% PASSING (SIEVES)			% MOISTURE	% ORGANIC	
				LL	PL	FSAND	CLAY	2.0mm	425um			75um
SS-24	129+40	114 m LL	A-2(2)	32	15	21.8	36.8	9.7	32.3	100	89	42
SS-25	129+40	114 m LL	A-2-4(1)	18	NP	34.1	51.5	4.2	10.1	100	76	15
S-30	131+80	114 m LL	A-2-4(1)	15	NP	28.4	48.2	12.3	11.1	100	85	25
S-31	131+80	113 m LL	A-8(1)	27	13	23.6	37.8	10.3	28.4	100	87	29
S-32	131+80	114 m LL	A-2-4(1)	20	NP	43.7	39.8	3.0	13.1	100	77	17

PVI = 130+05.49  
BL = 45.737 m  
K = 105  
VC = 60 m

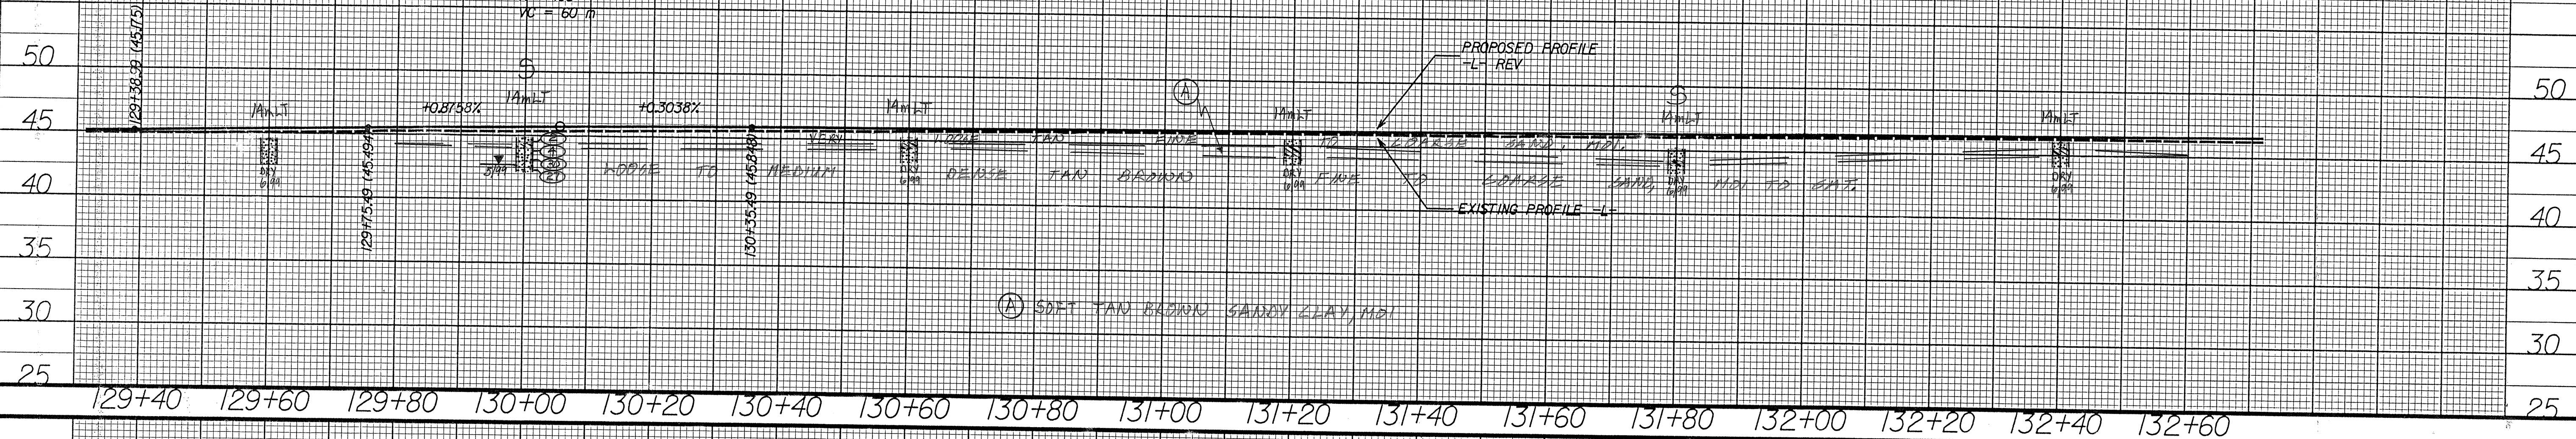

SAMPLE NO.	STATION OFFSET	DEPTH INTERVAL	AASHTO CLASS	% BY WEIGHT			% PASSING (SIEVES)			% MOISTURE	% ORGANIC	
				LL	PL	FSAND	CLAY	2.0mm	425um			75um
SS-26	133+00	114 m LL	A-2-4(1)	14	NP	29.3	47.5	13.1	10.1	100	85	24
S-23	134+80	114 m LL	A-2-4(1)	13	NP	31.2	49.8	8.9	10.1	100	81	20
S-24	134+80	114 m LL	A-4(1)	23	8	24.4	38.8	8.5	28.3	100	86	28
S-25	134+80	114 m LL	A-2-4(1)	19	NP	24.1	49.5	2.2	13.1	100	80	17

PVI = 133+23.49  
BL = 46.723 m  
K = 104  
VC = 73 m

SOFT TAN BROWN CLAYEY SILT AND SANDY CLAY, MBI

